

Good. Safe. Yellow.

Catalogue 2024/2025



Klingspor
Abrasive Technology



Klingspor products are marked with the oSa label



What does oSa mean?

In a host of applications, grinding and cutting require very high peripheral speeds from the rotating abrasive product. These products must therefore be particularly safe so as to stand up to the extreme mechanical and thermal stress.

Regrettably there are no globally binding safety requirements for abrasive products.

This is why responsible manufacturers of abrasive products from a number of European countries set up the Organisation for the Safety of Abrasives (oSa) in 2000 and thus setting a clear signal against inferior and dangerous products.

The user recognises these quality grade products from the oSa trade name. They signify to the manufacturer and trader a reduced liability risk, a market and competitive benefit and an image gain.

As a part of their in-house quality management system, the manufacturers see to it that the exact provisions are kept to and that only safe, high quality abrasive products are produced and marketed. The fact that the oSa – Organisation for the Safety of Abrasives - issues the worldwide protected oSa trademark to members is confirmation of this internal commitment.

The oSa label does not mean that the Organisation for the Safety of Abrasives or its institutions assume any liability of the designated products.



Contents

General information	
Contents	3

Coated abrasives	
Product summary	4-9

Rolls	
Applications guide	10-11
Rolls	12-27

Belts	
Applications guide	28-29
Short and long belts	30-65
Sleeves	66-68

Wide belts	
Wide belts	69-85

Fibre discs	
Applications guide	86
Fibre discs	87-97

Strips/sheets/discs	
Strips/sheets	
Applications guide	98
Strips/sheets	99-119
Discs	
Discs	120-145

Quick Change Discs	
Applications guide	146
Quick Change Discs	147-155

Abrasive mops	
Applications guide	156
Abrasive mop wheels, drums	157-163
Small abrasive mops	
Applications guide	164
Small abrasive and finishing mops	165-169

Non-woven products	
Applications guide	170-171
Non-woven rolls	172-173
Non-woven hand pads	173-174
Non-woven belts	174-176
Non-woven discs	176-179
Non-woven quick change discs	180-184
Non-woven mop wheels and drums	185-188
Non-woven abrasive mop discs	189
Unitised wheels, clean and strip discs, power wheels	190-195

Abrasive mop discs	
Applications guide	196
Abrasive mop discs	197-211

Cutting-off wheels	
Applications guide	212-213
Cutting-off wheels 0,8-1,2 mm	214-219
Cutting-off wheels 1,6-1,9 mm	220-222
Cutting-off wheels 2,0-3,2 mm	223-227
Large cutting-off wheels	228-232

Grinding discs	
Grinding discs	233-237
Cup grinding wheels	238-239

Diamond tools	
Applications guide	240
Diamond cutting blades	241-251 256-270
Diamond cup grinding wheels	252-255
Diamond drill bits & other diamond tools	
Diamond drill bits	271-273 276-277
Other diamond tools	274-275

Flexible abrasives	
Applications guide	278
Flexible abrasives	279-281

Carbide burrs	
Applications guide	282
Carbide burrs	283-291

Wire brushes	
Applications guide	292
Wire brushes	293-301

Saw blades	
Applications guide	302-303
Saw blades	304-323

Retail range	
Applications guide	324-327
Retail range	328-365

Service	
Conditions of Sale	366-367



All products with catalogue numbers are held in stock in Germany and can be delivered within a short time.

Product guide

Coated abrasives

	Type	Properties	Backing	Grain type
Abrasive paper	PS 8 A	Waterproof	A-paper	SiC
	PS 8 C	Waterproof	C-paper	SiC
	PS 11 A	Waterproof	A-paper	SiC
	PS 11 C	Waterproof	C-paper	SiC
	PS 20 F		F-paper	Aluminium oxide
	PS 20 FW	Specially coated	F-paper	Aluminium oxide
	PS 21 F		F-paper	Zirconia alumina
	PS 22 F ACT	ANTISTATIC	F-paper	Aluminium oxide
	PS 22 N		E-paper	Aluminium oxide
	PS 24 F ACT	ANTISTATIC	F-paper	SiC
	PS 27 DW	Specially coated, ANTISTATIC	D-paper	SiC
	PS 28 F	ANTISTATIC	F-paper	Aluminium oxide
	PS 29 F ACT	ANTISTATIC	F-paper	Aluminium oxide
	PS 30 D		D-paper	Aluminium oxide
	PL 31 B		B-paper	Aluminium oxide
	PS 33 B		B-paper	Aluminium oxide
	PS 33 C		C-paper	Aluminium oxide
	PS 38 G ACT	ANTISTATIC	G-paper	SiC
	PS 524 E	ANTISTATIC	E-paper	SiC
	PS 61 F		F-paper	Ceramic aluminium oxide
	PS 729 F		F-paper	Aluminium oxide-agglomerate
	FP 73 W	Specially coated	Film	Aluminium oxide
	PS 73 BW	Specially coated	B-paper	Aluminium oxide
	PS 73 BWF	Specially coated	B-paper + foam core	Aluminium oxide
	PS 73 CWF	Specially coated	C-paper + foam core	Aluminium oxide
Self-fastening	PS 19 EK		E-paper	SiC
	PS 21 FK		F-paper	Zirconia alumina
	PS 22 K		E-paper	Aluminium oxide
	PS 33 BK		B-paper	Aluminium oxide
	PS 33 CK		C-paper	Aluminium oxide
	CS 411 XK		X-cotton	Zirconia alumina
	CS 920 YK	Multibond	Y-polyester	Ceramic aluminium oxide
	PS 61 FK		F-paper	Ceramic aluminium oxide
	FP 73 WK	Specially coated	Film	Aluminium oxide
	PS 73 BWK	Specially coated	B-paper	Aluminium oxide
	PS 73 CWK	Specially coated	C-paper	Aluminium oxide
	PS 77 CK T-ACT	T-ACT coating	C-paper	Aluminium oxide
	FP 77 K T-ACT	T-ACT coating	Film	Aluminium oxide

Cloth

JF	Cotton, light, highly flexible
GX	Blended cloth, light, flexible
J	Cotton, light
XF	Cotton, heavy, flexible

Cloth

X	Cotton, heavy
Y	Polyester, heavy, highly firm
Z	Polyester, heavy, highly firm, can be divided into segments

Paper

A	approx. 95 g/m ²
B	approx. 105 g/m ²
C	approx. 110 g/m ²
D	approx. 130 g/m ²

Paper

E	approx. 250 g/m ²
F	approx. 300 g/m ²
G	approx. 400 g/m ²

Bonding agent

K	Resin
L	Glue

Product guide

Coated abrasives



					Page									
Type	Coating	Bonding agent	Waterproof	Available grits	Rolls	File belts	Belts for handheld grinders	Short and long belts	Spirabands	Wide belts	Fibre discs	Strips	Sheets	Discs
PS 8 A	●	K	✓	180–2500									99	
PS 8 C	●	K	✓	60–150									99	
PS 11 A	●	K	✓	220–2000									101	
PS 11 C	●	K	✓	60–400, 600, 1000									100	120
PS 20 F	●	K		60–320, 400				38		69				
PS 20 FW	●	K		80,120–180				38		69				
PS 21 F	●	K		40, 60–320, 400, 600				38		70				
PS 22 F ACT	●	K		40, 60–400	12			39		70		105		
PS 22 N	○	K		24, 40, 60–240, 320, 400	13									
PS 24 F ACT	●	K		80, 120				39		71				
PS 27 DW	○	K		180, 240, 320, 400, 600				40		72				
PS 28 F	○	K		40–320, 400, 600				40		72				
PS 29 F ACT	○	K		40–320, 400, 600	17			41		73				
PS 30 D	○	K		40, 60–240, 320	13							105	102	
PL 31 B	○	L		40–320, 400	14							106	102	
PS 33 B	○	K		150–320, 400–600	16								104	
PS 33 C	○	K		40, 60–120	15								103	
PS 38 G ACT	●	K		80–180						74				
PS 524 E	●	K		40, 60–800				39		71				
PS 61 F	●	K		60, 80, 120–320, 400				42		74				
PS 729 F	●	K		180, 240, 320				42		75				
FP 73 W	○	K		80–180, 240, 320, 400, 600–1500				43						
PS 73 BW	○	K		150–1500									104	
PS 73 BWF	○	K		150, 180, 240, 320, 400	18									
PS 73 CWF	○	K		120	17									
PS 19 EK	●	K		36, 40, 60–120, 220, 320, 400, 600, 800, 1200								107		121
PS 21 FK	●	K		40, 60–180, 240, 320, 400										121
PS 22 K	○	K		24, 40, 60–240, 320, 400								107		123
PS 33 BK	○	K		150–320, 400–600								109		128
PS 33 CK	○	K		40, 60–120								108		127
CS 411 XK	●	K		40, 60										143
CS 920 YK	●	K		60–120										143
PS 61 FK	●	K		60, 80, 120–180, 240										132
FP 73 WK	○	K		80–180, 240, 320, 400, 600–800, 1200								110		133
PS 73 BWK	○	K		150–1500										135
PS 73 CWK	○	K		40, 60–120										134
PS 77 CK T-ACT	○	K		60–220								111		137
FP 77 K T-ACT	○	K		240, 280, 320, 400–2000				43				110		136

● = close ○ = semi-open ○ = open

Product guide

Coated abrasives

	Type	Properties	Backing	Grain type
Abrasive cloth	CS 308 Y		Y-polyester	Aluminium oxide
	LS 309 J		J-cotton	Aluminium oxide
	LS 309 JF		JF-cotton	Aluminium oxide
	LS 309 X		X-cotton	Aluminium oxide
	LS 309 XH		X-cotton	Aluminium oxide
	CS 310 X		X-cotton	Aluminium oxide
	CS 310 XF		XF-cotton	Aluminium oxide
	CS 311 Y ACT	ANTISTATIC	Y-polyester	Aluminium oxide
	LS 312 JF		JF-cotton	Aluminium oxide
	LS 313 JF	Multibond	JF-cotton	Aluminium oxide
	LS 314 JF		JF-cotton	Aluminium oxide
	LS 318 JF ACT	ANTISTATIC	JF-cotton, SUPERFLEX	Aluminium oxide
	LS 912 JF		JF-cotton	Ceramic aluminium oxide
	CS 320 Y	Waterproof	Y-polyester	SiC
	CS 321 X	Waterproof	X-cotton	SiC
	CS 322 X	Waterproof	X-cotton	Cork
	CS 325 Y	KULEX, waterproof	Y-polyester	SiC agglomerate
	CS 326 Y	KULEX, waterproof	Y-polyester	Aluminium oxide-agglomerate
	CS 329 JF	KULEX	JF-cotton	Aluminium oxide-agglomerate
	CS 329 Y	KULEX	Y-polyester	Aluminium oxide-agglomerate
	CS 330 X	Waterproof	X-cotton	SiC / Cork
	CS 333 JF		JF-cloth	SiC
	CS 333 X		X-cotton	SiC
	CS 333 XF		XF-cotton	SiC
	CS 336 Y	ANTISTATIC	Y-polyester	SiC
	CS 341 X	Waterproof	X-cotton	Aluminium oxide
	KL 361 JF		JF-cotton	Aluminium oxide
	KL 371 X		X-cotton	Aluminium oxide
	KL 385 JF		JF-cotton	Aluminium oxide
	CS 409 Y	Multibond	Y-polyester	Zirconia alumina
	CS 410 X	Multibond	X-cotton	Aluminium oxide
	CS 411 X		X-cotton	Zirconia alumina
	CS 411 Y	Waterproof	Y-polyester	Zirconia alumina
	CS 412 Y	Waterproof	Y-polyester	Aluminium oxide
	CS 416 Y	Waterproof	Y-polyester	Zirconia alumina
	CS 420 Y	Waterproof, NOPPEX	Y-polyester	Aluminium oxide
	CS 451 X	Multibond	X-cotton	Zirconia alumina
	GX 533 JF		JF-blended cloth	SiC
	CS 538 Z ACT	ANTISTATIC	Z-polyester	SiC
	CS 631 XF	Multibond	XF-cotton	Ceramic aluminium oxide
	CS 710 XF		XF-cotton	Aluminium oxide
	CS 729 X	Waterproof	X-cotton	Aluminium oxide-agglomerate
	CS 757 JF	KULEX	JF-cotton	Aluminium oxide-agglomerate
	GX 712 JF		JF-blended cloth	Aluminium oxide
	CS 811 Y ACT	Waterproof	Y-polyester	Zirconia alumina
	CS 911 X		X-cotton/polyester	Ceramic aluminium oxide
	CS 913 X	Multibond	X-cotton/polyester	Ceramic aluminium oxide
	CS 920 Y ACT	Multibond	Y-polyester	Ceramic aluminium oxide
	CS 922 Y ACT	Waterproof	Y-polyester	Ceramic aluminium oxide
	CS 931 JF	Multibond	JF-cotton	Ceramic aluminium oxide
	CS 959 JF	KULEX	JF-cotton	Ceramic agglomerate
	GX 931 JF	Multibond	JF-blended cloth	Ceramic aluminium oxide

Cloth

JF	Cotton, light, highly flexible
GX	Blended cloth, light, flexible
J	Cotton, light
XF	Cotton, heavy, flexible

Cloth

X	Cotton, heavy
Y	Polyester, heavy, highly firm
Z	Polyester, heavy, highly firm, can be divided into segments

Paper

A	approx. 95 g/m ²
B	approx. 105 g/m ²
C	approx. 110 g/m ²
D	approx. 130 g/m ²

Paper

E	approx. 250 g/m ²
F	approx. 300 g/m ²
G	approx. 400 g/m ²

Bonding agent

K	Resin
L	Glue

Product guide

Coated abrasives



					Page									
Type	Coating	Bonding agent	Waterproof	Available grits										
					Rolls	File belts	Belts for handheld grinders	Short and long belts	Spirabands	Wide belts	Fibre discs	Strips	Sheets	Discs
CS 308 Y	●	K		40, 60–180, 240				44		76				
LS 309 J	●	K		60–500				45						
LS 309 JF	●	K		60–400, 600, 800	19			46						
LS 309 X	●	K		40–360	19	30		44						
LS 309 XH	●	K		40–180, 240			36							
CS 310 X	●	K		16-24, 36–320, 400–600				46	66	76				
CS 310 XF	●	K		40–180, 240		30		47						
CS 311 Y ACT	○	K		36–220				48		77				
LS 312 JF	●	K		60–320, 400				48						
LS 313 JF	●	K		80–240, 320				49						
LS 314 JF	●	K		120, 240–320, 400				49						
LS 318 JF ACT	○	K		80–180, 240, 400				49						
LS 912 JF	●	K		60–180,240,320,400				50						
CS 320 Y	●	K	✓	24, 40, 60–120, 180				50		77				
CS 321 X	●	K	✓	80–240, 320, 400, 500, 800				51		78				
CS 322 X	●	K	✓	Polishing fineness				51						
CS 325 Y	●	K	✓	80, 120, 180, 240, 320, 400, 600, 800				51						
CS 326 Y	●	K	✓	60, 80, 120, 180, 240, 320, 400, 600, 800				52		78				
CS 329 JF	●	K		120,180,240				52						
CS 329 Y	●	K		80, 120, 180, 240, 320, 400, 600				53		79				
CS 330 X	●	K	✓	220, 280, 400, 600, 800				53		79				
CS 333 JF	●	K		120–180, 240–320				54						
CS 333 X	●	K		24, 40, 60–150				53						
CS 333 XF	●	K		60–100, 240, 280				54						
CS 336 Y	○	K		36, 40, 50						80				
CS 341 X	●	K	✓	60–320, 400, 500, 600				54		80				
KL 361 JF	●	K		40–600	20							116	113	
KL 371 X	●	L		30, 40–320, 400									114	
KL 385 JF	●	K		40, 60–320, 400, 600	24								115	
CS 409 Y	●	K		36–120				55		81				
CS 410 X	●	K		40, 60, 80, 120, 180				55						
CS 411 X	●	K		24, 36–80, 120				56						
CS 411 Y	●	K	✓	24, 36–120		31		57		81				
CS 412 Y	●	K	✓	24, 36, 40, 60–180, 240				57		82				
CS 416 Y	○	K	✓	24, 36–120				58						
CS 420 Y		K	✓	120, 180, 240, 320, 400				58						
CS 451 X	●	K		36, 40, 60, 80					67					
GX 533 JF	●	K		80–180, 240–320, 400, 600				59						
CS 538 Z ACT	●	K		36–180						82				
CS 631 XF	○	K		60–120		32		59						
CS 710 XF	●	K		80–180, 240		33		60						
CS 729 X	●	K	✓	120, 180, 240, 320, 400				61		83				
CS 757 JF	○	K		120				61						
GX 712 JF	●	K		60–320, 400				60						
CS 811 Y ACT	●	K	✓	24, 36–80				61						
CS 911 X	●	K		36–120		33		62		83				
CS 913 X	●	K		40, 60–120		34		62		84				
CS 920 Y ACT	●	K		24, 36, 40, 50, 60, 80		34		63		84				
CS 922 Y ACT	●	K	✓	36–180		35		63		85				
CS 931 JF	○	K		80–120, 180, 240–320, 400				64						
CS 959 JF	○	K		120				65						
GX 931 JF	○	K		60–180, 240, 320				64						

● = close ● = semi-open ○ = open

Product guide

Coated abrasives

	Type	Properties	Backing	Grain type
Fibre discs	CS 561		Fibre	Aluminium oxide
	FS 764 ACT		Fibre	Aluminium oxide
	CS 565		Fibre	Zirconia alumina
	CS 570	Multibond	Fibre	Zirconia alumina
	FS 964 ACT		Fibre	Ceramic aluminium oxide
	FS 966 ACT	Multibond	Fibre	Ceramic aluminium oxide
Non-woven web and surface conditioning material	AN 400	Waterproof, self-fastening	Abrasive screen	Aluminium oxide
	NRO 400	Waterproof	Non-woven web	Aluminium oxide
	NRO 500	Waterproof	Non-woven web	SiC
	NPA 400	Waterproof	Non-woven web	Aluminium oxide
	NPA 500	Waterproof	Non-woven web	SiC
	SV 484	Waterproof	Non-woven material with fabric lining	Aluminium oxide
	NDS 400 K	Waterproof	Non-woven material with hook and loop lamination	Aluminium oxide / SiC
	NDS 800	Waterproof	Non-woven fibres with fabric lining	Aluminium oxide
	NBF 800	Waterproof	Non-woven material with fabric lining	Aluminium oxide
	NBS 800	Waterproof	Non-woven material with fabric lining	Aluminium oxide
	FD 500	Waterproof, self-fastening	Foam core	Aluminium oxide / SiC
	SK 500	Abrasive hand block, flexible, waterproof	Sponge	Aluminium oxide
	SK 700 A	Abrasive hand block, waterproof	Sponge	Aluminium oxide
	SW 501	Abrasive sponge, waterproof	Sponge	Aluminium oxide
	SW 501 TR	Abrasive sponge, tear-resistant, waterproof	Sponge	Aluminium oxide
	SW 502	Abrasive sponge, waterproof	Sponge	SiC
	SW 510	Abrasive sponge, waterproof	Sponge	Aluminium oxide

Cloth

JF	Cotton, light, highly flexible
GX	Blended cloth, light, flexible
J	Cotton, light
XF	Cotton, heavy, flexible

Cloth

X	Cotton, heavy
Y	Polyester, heavy, highly firm
Z	Polyester, heavy, highly firm, can be divided into segments

Paper

A	approx. 95 g/m ²
B	approx. 105 g/m ²
C	approx. 110 g/m ²
D	approx. 130 g/m ²

Paper

E	approx. 250 g/m ²
F	approx. 300 g/m ²
G	approx. 400 g/m ²

Bonding agent

K	Resin
L	Glue

Product guide

Coated abrasives



						Page									
	Type	Coating	Bonding agent	Waterproof	Available grits	Rolls	File belts	Belts for handheld grinders	Short and long belts	Spirabands	Wide belts	Fibre discs	Strips	Sheets	Discs
Fibre discs	CS 561	●	K		16–240, 320							87			
	FS 764 ACT	●	K		24, 36, 40, 60, 80, 120							89			
	CS 565	●	K		24, 36–100							90			
	CS 570	●	K		24, 36–120							91			
	FS 964 ACT	●	K		24, 36–80, 120							92			
	FS 966 ACT	●	K		24, 36–60, 80, 120							93			
Non-woven web and surface conditioning material	AN 400	○	K	✓	80–800	26							111		138
	NRO 400		K		medium, fine, very fine	172									
	NRO 500		K		medium, ultra fine	173									
	NPA 400		K		coarse, medium, fine, very fine									173	
	NPA 500		K		medium, ultra fine, without grain									174	
	SV 484		K		coarse, medium, very fine										177
	NDS 400 K		K	✓	very fine, ultra fine										176
	NDS 800		K		coarse, medium, very fine										178
	NBF 800		K	✓	coarse, medium, very fine	174									
	NBS 800		K	✓	coarse, medium, very fine				175						
	FD 500	●	K	✓	1000, 1500, 2000, 3000										141
	SK 500	●	K	✓	60, 80, 100, 120, 180, 220, 280								117		
	SK 700 A	●	K	✓	60, 80, 100, 120								117		
	SW 501	●	K	✓	120, 220								118		
	SW 501 TR	●	K	✓	100–220								118		
	SW 502	●	K	✓	120, 220								119		
	SW 510	●	K	✓	100, 180, 220, 320								119		

● = close ● = semi-open ○ = open

Rolls

Product finder

Application / material	Machine		Form		Product		Product properties				Page
	Hand sanding	Orbital sander	Profile	Surface	Standard	Premium	Bonding agent	Grain	Coating	Backing	
Wood		●		●	<i>PS 22 N</i>		Resin	Aluminium oxide	○	E-paper	13
		●		●		<i>PS 22 F ACT</i>	Resin	Aluminium oxide	●	F-paper	12
		●		●		<i>PS 29 F ACT</i>	Resin	Aluminium oxide	○	F-paper	17
	●	●	●	●		<i>LS 309 JF</i>	Resin	Aluminium oxide	●	JF-cotton	19
	●	●	●	○	<i>PL 31 B</i>		Glue	Aluminium oxide	○	B-paper	14
	●		○	●	<i>PS 30 D</i>		Resin	Aluminium oxide	○	D-paper	13
		●		●		<i>AN 400</i>					26
Varnish, paint, plastics	●		●	○	<i>PL 31 B</i>		Glue	Aluminium oxide	○	B-paper	14
	●		○	●	<i>PS 30 D</i>		Resin	Aluminium oxide	○	D-paper	13
	●	●	●	●		<i>PS 33 B</i>	Resin	Aluminium oxide	○	B-paper	16
	●	●	●	●		<i>PS 33 C</i>	Resin	Aluminium oxide	○	C-paper	15
	●		●	○		<i>PS 73 BWF</i>	Resin	Aluminium oxide	○	B-paper + foam core	18
	●		●	○		<i>PS 73 CWF</i>	Resin	Aluminium oxide	○	C-paper + foam core	17
		●		●		<i>AN 400</i>					26
Metals	●		●	○	<i>KL 385 JF</i>		Resin	Aluminium oxide	●	JF-cotton	24
	●		●	○		<i>KL 361 JF</i>	Resin	Aluminium oxide	●	JF-cotton	20
	●	●		●		<i>LS 309 X</i>	Resin	Aluminium oxide	●	X-cotton	19
	●	●	●	●		<i>LS 309 JF</i>	Resin	Aluminium oxide	●	JF-cotton	19

Rolls

Product finder



Type	Grit range
PS 22 F ACT	40–150
PS 28 F	60–150
PS 29 F ACT	60–150
CS 308 Y	40–80, 120
LS 309 X	40–360
LS 309 J	60–320
LS 309 JF	60–400
CS 310 X	24–400
CS 310 XF	40–280
LS 312 JF	60–320, 400
CS 321 X	80–400
CS 333 X	60, 80, 120, 150
CS 341 X	50–320
KL 361 JF	40–600
KL 385 JF	40–600
CS 410 X	60–120
CS 411 X	24–120
CS 411 Y	36–80

Paper	
B	approx. 105 g/m ²
C	approx. 110 g/m ²
D	approx. 130 g/m ²
E	approx. 250 g/m ²
F	approx. 300 g/m ²

Cloth	
X	Cotton, heavy
J	Cotton, light
JF	Cotton, light, highly flexible
Y	Polyester, heavy, high strength
XF	Cotton, heavy, flexible

Minimum order quantities for made to order items

Width	Minimum order quantities
10 mm	29 pieces
15 mm	19 pieces
20 mm	14 pieces
25 mm	11 pieces

Width	Minimum order quantities
28 mm	10 pieces
30 mm	9 pieces
35 mm	8 pieces
40 mm	7 pieces

Width	Minimum order quantities
50 mm	5 pieces
60 mm	4 pieces
80 mm	3 pieces
95 mm	3 pieces

Width	Minimum order quantities
100 mm	2 pieces
120 mm	2 pieces
125 mm	2 pieces
140 mm	2 pieces

Width	Minimum order quantities
150 mm	1 piece
250 mm	1 piece
300 mm	1 piece



The standard length for production rolls is 50M.

We reserve the right to over-deliver or under-deliver made to order items.

Other sizes and grits available on request.

Rolls with paper backing

Coated abrasives

Abrasive paper

PS 22 F ACT



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	F-paper

Applications:

Wood	●	NF metals	●
Metals	●		
Plastic	●		
Steel	●		

Advantages: High abrasive performance - Uniform, fine surface scratch pattern - Premium product for use on hardwood, varnish, filler - Long service life and minimal clogging due to ACT recipe - High edge stability

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
95 x 50000	60	1	20822
95 x 50000	80	1	20850
95 x 50000	100	1	20884
95 x 50000	120	1	20916
95 x 50000	150	1	20940
95 x 50000	180	1	20960
110 x 50000	40	1	2969
110 x 50000	60	1	2971
110 x 50000	80	1	2972
110 x 50000	100	1	2973
110 x 50000	120	1	2974
110 x 50000	150	1	2975
110 x 50000	180	1	2976
110 x 50000	240	1	2978
115 x 50000	40	1	2983
115 x 50000	60	1	2985
115 x 50000	80	1	2986
115 x 50000	100	1	2987
115 x 50000	120	1	2988
115 x 50000	150	1	2989
115 x 50000	180	1	2990
115 x 50000	220	1	2991
115 x 50000	240	1	2992
150 x 50000	80	1	3014
150 x 50000	120	1	3016
200 x 50000	40	1	3053
200 x 50000	60	1	3055
200 x 50000	80	1	3056
200 x 50000	120	1	3058

Rolls with paper backing

Coated abrasives



Abrasive paper

PS 22 N



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	E-paper

Applications:

Wood	●	Steel	○
Metals	○		
Paint/Varnish/Filler	○		
Plastic	○		

Advantages: Universal product for hand sanding and handheld machine sanding of virtually any material - Large grit range allows use from rough sanding to finishing

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
115 x 50000	40	1	244611
115 x 50000	60	1	244612
115 x 50000	80	1	244613
115 x 50000	100	1	244614
115 x 50000	120	1	244615
115 x 50000	150	1	244616
115 x 50000	180	1	244599
115 x 50000	240	1	244597

Abrasive paper

PS 30 D



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	D-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Metals	○

Advantages: Sharp grit and high aggressiveness for use on wood, varnish, fillers - Flexible and tear-resistant, easy folding - Product with good price-performance ratio

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
115 x 50000	40	1	174086
115 x 50000	60	1	174088
115 x 50000	80	1	174089
115 x 50000	100	1	174090
115 x 50000	120	1	174091



Rolls with paper backing

Coated abrasives

►► Continuation of PS 30 D, Abrasive paper

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
115 x 50000	150	1	174092
115 x 50000	180	1	174093
115 x 50000	240	1	182418
115 x 50000	320	1	182419

Finishing paper

PL 31 B



Properties

Bonding agent	Glue
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Metals	●

Advantages: Product with optimal price-performance ratio - Optimized wear properties for hand sanding and handheld machine sanding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
95 x 50000	60	1	3281
95 x 50000	80	1	3282
95 x 50000	100	1	3191
95 x 50000	120	1	3192
95 x 50000	180	1	3194
95 x 50000	240	1	3196
110 x 50000	40	1	3287
110 x 50000	60	1	3289
110 x 50000	80	1	3290
110 x 50000	100	1	3213
110 x 50000	120	1	3214
110 x 50000	150	1	3215
110 x 50000	180	1	3216
110 x 50000	220	1	3217
110 x 50000	240	1	3218
110 x 50000	280	1	3219
110 x 50000	320	1	3220
110 x 50000	400	1	3222
115 x 50000	40	1	3291
115 x 50000	60	1	3293
115 x 50000	80	1	3294
115 x 50000	100	1	3224
115 x 50000	120	1	3225
115 x 50000	150	1	3226
115 x 50000	180	1	3227
115 x 50000	220	1	3228



Rolls with paper backing

Coated abrasives



Rolls

►► Continuation of PL 31 B, Finishing paper

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
115 x 50000	240	1	3229
115 x 50000	280	1	3230
115 x 50000	320	1	3231
115 x 50000	400	1	3233

Abrasive paper

PS 33 C



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	C-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	○

Advantages: Very high removal rate - Minimal clogging due to active abrasive substances - Longer service life - Good tear resistance and flexibility

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
110 x 50000	60	1	146981
110 x 50000	80	1	146982
110 x 50000	100	1	146983
110 x 50000	120	1	146386
115 x 50000	60	1	155815
115 x 50000	80	1	147575
115 x 50000	100	1	147576
115 x 50000	120	1	153398

Rolls with paper backing

Coated abrasives

Abrasive paper

PS 33 B



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	○

Advantages: Very high removal rate - Minimal clogging due to active abrasive substances - Longer service life - Good tear resistance and flexibility

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
110 x 50000	150	1	148494
110 x 50000	180	1	147935
110 x 50000	220	1	148495
110 x 50000	240	1	147114
110 x 50000	280	1	148496
110 x 50000	320	1	147110
110 x 50000	400	1	146387
115 x 50000	150	1	153177
115 x 50000	180	1	149480
115 x 50000	220	1	149698
115 x 50000	240	1	147055
115 x 50000	280	1	165031
115 x 50000	320	1	148891
115 x 50000	400	1	145520

Rolls with paper backing

Coated abrasives



Rolls

Abrasive paper, ANTISTATIC

PS 29 FACT



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Open
Backing	F-paper

Applications:

Wood	●
Paint/Varnish/Filler	○

Advantages: High aggressiveness and long service life when used on wood (especially softwood) due to ACT recipe - High edge stability - Premium product for wood in general, varnish and filler

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
110 x 50000	80	1	307878
110 x 50000	100	1	307879
110 x 50000	120	1	307880
110 x 50000	150	1	307881
110 x 50000	180	1	307882
115 x 50000	60	1	307884
115 x 50000	80	1	302592
115 x 50000	100	1	307885
115 x 50000	120	1	302591
115 x 50000	150	1	307886

Abrasive paper with foam backing

PS 73 CWF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	C-paper + foam core

Applications:

Wood	●
Paint/Varnish/Filler	●
Plastic	●

Advantages: Very good distribution of sanding pressure due to elastic and conforming foam backing, therefore preventing over sanding of thin coatings and providing a very fine finish - High flexibility and very good adaptability to contours and profiles - Reduced clogging due to additional stearate coating and semi-open coated grain - Easy handling by tearing handy pads from a pre-perforated roll out of a dispenser box - Dimensions of abrasive pads: 115 x 140 mm, approx. 180 pcs

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
115 x 25000	120	1	321755

Rolls with paper backing

Coated abrasives

Abrasive paper with foam backing

PS 73 BWF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper + foam core

Applications:

Wood	●
Paint/Varnish/Filler	●
Plastic	●

Advantages: Very good distribution of sanding pressure due to elastic and conforming foam backing, therefore preventing over sanding of thin coatings and providing a very fine finish - High flexibility and very good adaptability to contours and profiles - Reduced clogging due to additional stearate coating and semi-open coated grain - Easy handling by tearing handy pads from a pre-perforated roll out of a dispenser box - Dimensions of abrasive pads: 115 x 140 mm, approx. 180 pcs

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
115 x 25000	150	1	325711
115 x 25000	180	1	321756
115 x 25000	240	1	321757
115 x 25000	320	1	321758
115 x 25000	400	1	321760

Rolls with cloth backing

Coated abrasives



Abrasive cloth

LS 309 X



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	X-cotton

Applications:

Metals	●
Wood	●

Advantages: High-quality universal abrasive cloth for diverse applications in metal and woodworking - Good price-performance ratio

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Abrasive cloth

LS 309 JF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	JF-cotton

Applications:

Metals	●
Wood	●

Advantages: High abrasive performance - Fine surface scratch pattern - Very good adaptation to contours, tight radiuses and profiles due to highly flexible cotton cloth

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Rolls with cloth backing

Coated abrasives

Abrasive cloth

LS 309 JF slashed



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	JF-cotton

Applications:

Metals	●
Wood	●

Advantages: Outstanding adaptation for use on turned parts - Individual applications due to different slotting variants

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Abrasive cloth, brown

KL 361 JF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	JF-cotton

Applications:

Stainless steel	●	Wood	●
Steel	●	Plastic	ⓘ
Metals	●		
NF metals	●		

Advantages: High-quality universal abrasive cloth - Optimal adaptation to workpiece contours - Tears off cleanly and easily from the roll

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
25 x 50000	40	1	3769
25 x 50000	60	1	3771
25 x 50000	80	1	3772
25 x 50000	100	1	3773
25 x 50000	120	1	3774
25 x 50000	150	1	3775
25 x 50000	180	1	3776
25 x 50000	220	1	3777
25 x 50000	240	1	3778
25 x 50000	320	1	3780
25 x 50000	400	1	3782
25 x 50000	600	1	64825
30 x 50000	60	1	3787



Rolls with cloth backing

Coated abrasives



Rolls

►► Continuation of KL 361 JF, Abrasive cloth, brown

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
30 x 50000	80	1	91286
30 x 50000	100	1	3789
30 x 50000	120	1	3790
30 x 50000	150	1	3791
30 x 50000	180	1	3792
30 x 50000	240	1	3794
30 x 50000	320	1	3796
30 x 50000	400	1	3798
40 x 25000	40	1	4201
40 x 25000	50	1	4202
40 x 25000	60	1	4203
40 x 25000	80	1	4204
40 x 25000	100	1	4205
40 x 25000	120	1	4206
40 x 25000	150	1	4207
40 x 25000	180	1	4208
40 x 25000	220	1	4209
40 x 25000	240	1	4210
40 x 25000	320	1	4212
40 x 25000	400	1	4214
40 x 50000	40	1	3833
40 x 50000	60	1	3835
40 x 50000	80	1	3836
40 x 50000	100	1	3837
40 x 50000	120	1	3838
40 x 50000	150	1	3839
40 x 50000	180	1	3840
40 x 50000	220	1	3841
40 x 50000	240	1	3842
40 x 50000	280	1	3843
40 x 50000	320	1	3844
40 x 50000	360	1	3845
40 x 50000	400	1	3846
40 x 50000	600	1	64830
50 x 25000	40	1	4217
50 x 25000	60	1	4219
50 x 25000	80	1	4220
50 x 25000	100	1	4221
50 x 25000	120	1	4222
50 x 25000	150	1	4223
50 x 25000	180	1	4224
50 x 25000	220	1	4225
50 x 25000	240	1	4226
50 x 25000	320	1	4228
50 x 25000	400	1	4230
50 x 25000	600	1	64831
50 x 50000	40	1	3849
50 x 50000	50	1	3850
50 x 50000	60	1	3851
50 x 50000	80	1	3852
50 x 50000	100	1	3853



Rolls with cloth backing

Coated abrasives

►► Continuation of KL 361 JF, Abrasive cloth, brown

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
50 x 50000	120	1	3854
50 x 50000	150	1	3855
50 x 50000	180	1	3856
50 x 50000	220	1	3857
50 x 50000	240	1	3858
50 x 50000	280	1	3859
50 x 50000	320	1	3860
50 x 50000	360	1	3861
50 x 50000	400	1	3862
50 x 50000	500	1	3863
50 x 50000	600	1	64832

Abrasive cloth, brown

KL 361 JF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	JF-cotton

Applications:

Stainless steel	●	Wood	●
Steel	●	Plastic	○
Metals	●		
NF metals	●		

Advantages: High-quality universal abrasive cloth - Optimal adaptation to workpiece contours - Tears off cleanly and easily from the roll

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
80 x 50000	80	1	3900
80 x 50000	120	1	3902
80 x 50000	150	1	3903
100 x 50000	40	1	3913
100 x 50000	50	1	3914
100 x 50000	60	1	3915
100 x 50000	80	1	3916
100 x 50000	100	1	3917
100 x 50000	120	1	3918
100 x 50000	150	1	3919
100 x 50000	180	1	3920
100 x 50000	220	1	3921
100 x 50000	240	1	3922
100 x 50000	320	1	3924
100 x 50000	400	1	3926
100 x 50000	600	1	64835
110 x 50000	40	1	3929
110 x 50000	60	1	3931
110 x 50000	80	1	3932



Rolls with cloth backing

Coated abrasives



►► Continuation of KL 361 JF, Abrasive cloth, brown

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
110 x 50000	100	1	3933
110 x 50000	120	1	3934
110 x 50000	180	1	3936
110 x 50000	240	1	3938
115 x 50000	40	1	3945
115 x 50000	60	1	3947
115 x 50000	80	1	3948
115 x 50000	100	1	3949
115 x 50000	120	1	3950
115 x 50000	150	1	3951
115 x 50000	180	1	3952
115 x 50000	240	1	3954
115 x 50000	320	1	3956
120 x 50000	60	1	3963
120 x 50000	80	1	3964
120 x 50000	100	1	3965
120 x 50000	120	1	3966
120 x 50000	180	1	3968
150 x 50000	40	1	3977
150 x 50000	60	1	3979
150 x 50000	80	1	3980
150 x 50000	100	1	3981
150 x 50000	120	1	3982
150 x 50000	150	1	3983

Rolls with cloth backing

Coated abrasives

Abrasive cloth, brown

KL 385 JF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	JF-cotton

Applications:

Metals	●	Wood	○
NF metals	●		
Stainless steel	○		
Plastic	○		

Advantages: Attractively priced universal product for profile grinding - Optimal adaptation to workpiece contours - Tears off cleanly and easily from the roll

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
40 x 25000	60	1	263707
40 x 25000	80	1	263708
40 x 25000	100	1	221375
40 x 25000	120	1	221378
40 x 25000	150	1	235281
40 x 25000	180	1	221379
40 x 25000	240	1	221381

Abrasive cloth, brown

KL 385 JF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	JF-cotton

Applications:

Metals	●	Wood	○
NF metals	●		
Stainless steel	○		
Plastic	○		

Advantages: Attractively priced universal product for profile grinding - Optimal adaptation to workpiece contours - Tears off cleanly and easily from the roll

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
25 x 50000	60	1	218196
25 x 50000	80	1	218197
25 x 50000	100	1	218198
25 x 50000	120	1	218199
40 x 50000	40	1	218077
40 x 50000	60	1	218079



Rolls with cloth backing

Coated abrasives



Rolls

►► Continuation of KL 385 JF, Abrasive cloth, brown

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
40 x 50000	80	1	218080
40 x 50000	100	1	218081
40 x 50000	120	1	218082
40 x 50000	150	1	218083
40 x 50000	180	1	218084
40 x 50000	220	1	218085
40 x 50000	240	1	218086
40 x 50000	320	1	218088
40 x 50000	400	1	218090
50 x 50000	40	1	218094
50 x 50000	60	1	218096
50 x 50000	80	1	218097
50 x 50000	100	1	218098
50 x 50000	120	1	218099
50 x 50000	150	1	218100
50 x 50000	180	1	218101
50 x 50000	220	1	218102
50 x 50000	240	1	218103
50 x 50000	320	1	218105
50 x 50000	400	1	218107

Abrasive cloth, brown

KL 385 JF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	JF-cotton

Applications:

Metals	●	Wood	○
NF metals	●		
Stainless steel	○		
Plastic	○		

Advantages: Attractively priced universal product for profile grinding - Optimal adaptation to workpiece contours - Tears off cleanly and easily from the roll

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
115 x 5000	60	1	278789
115 x 5000	80	1	278790
115 x 5000	120	1	278791
115 x 5000	320	1	278792
115 x 50000	40	1	224650
115 x 50000	60	1	228151
115 x 50000	80	1	228363
115 x 50000	100	1	228364
115 x 50000	120	1	228365
115 x 50000	150	1	228370



Rolls with cloth backing / Abrasive screen

Coated abrasives

►► Continuation of KL 385 JF, Abrasive cloth, brown

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
115 x 50000	180	1	228366
115 x 50000	240	1	228367
115 x 50000	320	1	228368
115 x 50000	400	1	228369

ROLL-BOX

ROLL-BOX



Advantages: Handy and saves storage of economy rolls - Abrasive tears off cleanly and easily - Quick and simple replacement of rolls - For 5 rolls with a width of 50 mm each - For set-up or attachment to the wall

Abrasives not included

Width x Length x Height in mm	Packing unit/pcs.	Cat. number
300 x 340 x 230	1	76403

Abrasive screen, self-fastening, waterproof

AN 400



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Backing	Polyester screen

Applications:

Paint/Varnish/Filler	●	Composite materials	●
Gel coats	●	Wood	●
Plaster	●	Wood-based materials	●
Plasterboard walls	●		

Advantages: Effective and full-surface dust extraction thanks to open grid structure - Dust-free grinding extends the service life of the abrasive - At the same time, improved health and safety thanks to reduced dust formation at the work station - Independent of existing extraction hole patterns - Waterproof

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
115 x 10000	80	1	348458
115 x 10000	100	1	353063
115 x 10000	120	1	348418
115 x 10000	150	1	349059




►► Continuation of AN 400 Abrasive screen, self-fastening, waterproof

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
115 x 10000	180	1	353062
115 x 10000	240	1	349058
115 x 10000	320	1	353061
115 x 10000	400	1	353060

Graphite coated canvas

CS 395 X



Properties

Grain	Graphite
Coating	Lamellar
Backing	X-cloth
Thickness	1,5 mm

Advantages: Reduces friction between the back side of the belt and the contact element - Reduces heat generation during the grinding process - Enables a smooth and constant grinding

No self-fastening support

All sizes and minimum purchasing quantities available on request

Self-fastening support

CS 396 Y



Properties

Engaging elements	Mushroom heads
Thickness	1,5 mm
Temperature range	-30° to +80°

Advantages: Can be cut to size easily - Simple and safe fixing on smooth and even surfaces - Allows a quick change of the abrasive

All sizes and minimum purchasing quantities available on request

Abrasive belts

Application	Type	Grain	Backing	Coating	Page
Steel	LS 309 J	Aluminium oxide	J-cotton	●	45
	LS 309 JF	Aluminium oxide	JF-cotton	●	46
	LS 309 X	Aluminium oxide	X-cotton	●	30,44
	LS 309 XH	Aluminium oxide	X-cotton	●	36
	CS 310 X	Aluminium oxide	X-cotton	●	46,66,76
	CS 341 X	Aluminium oxide	X-cotton waterproof	●	54,80
	CS 308 Y	Aluminium oxide	Y-polyester	●	44,76
Stainless steel	PS 61 F	Ceramic aluminium oxide	F-paper	●	42,74
	LS 312 JF	Aluminium oxide	JF-cotton	●	48
	LS 313 JF	Aluminium oxide	JF-cotton	●	49
	LS 912 JF	Ceramic aluminium oxide	JF-cotton	●	50
	CS 931 JF	Ceramic aluminium oxide	JF-cotton	○	64
	GX 931 JF	Ceramic aluminium oxide	JF-blended cloth	○	64
	GX 712 JF	Aluminium oxide	JF-blended cloth	●	60
	CS 631 XF	Ceramic aluminium oxide	XF-cotton	○	32, 59
	CS 410 X	Aluminium oxide	X-cotton	●	55
	CS 411 X	Zirconia alumina	X-cotton	●	56
	CS 411 Y	Zirconia alumina	Y-polyester	●	31,57,81
	CS 416 Y	Zirconia alumina	Y-polyester	○	58
	CS 409 Y	Zirconia alumina	Y-polyester	●	55,81
	CS 922 Y ACT	Ceramic aluminium oxide	Y-polyester	●	35,63,85
	CS 920 Y ACT	Ceramic aluminium oxide	Y-polyester	●	34,63,84
	CS 330 X	SiC / cork	X-cotton waterproof	●	53,79
	CS 326 Y	Aluminium oxide agglomerate	Y-polyester	●	52,78
	CS 329 JF	Aluminium oxide agglomerate	JF-cotton	●	52
	CS 329 Y	Aluminium oxide agglomerate	Y-polyester	●	53,79
	CS 420 Y	Aluminium oxide agglomerate	Y-polyester	●	58
	CS 325 Y	SiC agglomerate	Y-polyester	●	51
	CS 451 X	Zirconia alumina	X-cotton	●	67
Steel / Stainless steel	PS 20 F	Aluminium oxide	F-paper	●	38,69
	PS 21 F	Zirconia alumina	F-paper	●	38,70
	PS 729 F	Aluminium oxide agglomerate	F-paper	●	42,75
	CS 412 Y	Aluminium oxide	Y-polyester	●	57,82
	CS 310 XF	Aluminium oxide	XF-cotton	●	30,47
	CS 411 X	Zirconia alumina	X-cotton	●	56
	CS 411 Y	Zirconia alumina	Y-polyester	●	31,57,81
	CS 416 Y	Zirconia alumina	Y-polyester	○	58
	CS 330 X	SiC / cork	X-cotton waterproof	●	53,79
	CS 710 XF	Aluminium oxide	XF-cotton	●	33,60
	CS 729 X	Aluminium oxide agglomerate	X-cotton	●	61,83
	CS 757 JF	Aluminium oxide agglomerate	JF-cotton	○	61
	CS 811 Y ACT	Zirconia alumina	Y-polyester	●	61
	CS 911 X	Ceramic aluminium oxide	X-cotton/polyester	●	33,33,62,83
	CS 913 X	Ceramic aluminium oxide	X-cotton/polyester	●	34,34,62,84
	CS 959 JF	Ceramic agglomerate	JF-cotton	○	65

● = close ○ = semi-open ○ = open



Application	Type	Grain	Backing	Coating	Page
NF metals	CS 333 JF	SiC	JF-cotton	●	54
	CS 333 XF	SiC	XF-cotton	●	54
	GX 533 JF	SiC	JF-blended cloth	●	59
	GX 712 JF	Aluminium oxide	JF-blended cloth	●	60
	LS 314 JF	Aluminium oxide	JF-cotton	●	49
	PS 20 FW	Aluminium oxide	F-paper	●	38,69
Wood	PS 22 F ACT	Aluminium oxide	F-paper	●	39,70
	PS 28 F	Aluminium oxide	F-paper	○	40,72
	PS 29 F ACT	Aluminium oxide	F-paper	○	41,73
	PS 38 G ACT	SiC	G-paper	●	74
	LS 309 X	Aluminium oxide	X-cloth	●	30,44
	LS 309 XH	Aluminium oxide	X-cloth	●	36
	CS 311 Y ACT	Aluminium oxide	Y-polyester	○	48,77
	CS 308 Y	Aluminium oxide	Y-polyester	●	44,76
	LS 318 JF ACT	Aluminium oxide	JF-cloth	○	49
	CS 538 Z ACT	SiC	Z-polyester (can be segmented)	●	82
Paint / Varnish / Filler	PS 24 F ACT	SiC	F-paper	●	39,71
	PS 27 DW	SiC	D-paper	○	40,72
	PS 524 E	SiC	E-paper	●	39,71
	FP 73 W	Aluminium oxide	Film	●	43
	FP 77 K	Aluminium oxide	Film	●	43
Plastic	GX 533 JF	SiC	JF-blended cloth	●	59
Glass	CS 322 X	(Cork)	X-cloth waterproof		51
Plastic / Glass	CS 333 X	SiC	X-cloth	●	53
	CS 320 Y	SiC	Y-polyester	●	50,77
	CS 321 X	SiC	X-cloth	●	51,78

● = close ● = semi-open ○ = open

Minimum order quantities for made to order items

Width	Minimum order quantities
3 – 50 mm	30 pieces
51 – 60 mm	25 pieces
61 – 75 mm	20 pieces
76 – 100 mm	15 pieces
101 – 150 mm	10 pieces
151 – 300 mm	10 pieces
301 – 399 mm	30 pieces
400 mm and wider	10 pieces



We reserve the right to over-deliver or under-deliver made to order items.

The minimum length of production belts is 281 mm (cloth and paper backing)

Other sizes and grits available on request.

File belts

Coated abrasives

Abrasive cloth

LS 309 X



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	X-cotton

Applications:

Metals	●
NF metals	●
Wood	●

Advantages: Universal belt for metalworking and woodworking - Excellent price-performance ratio

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
28 x 533	40	F4G	20	36755
28 x 533	60	F4G	20	37945
28 x 533	80	F4G	20	39236
28 x 533	100	F4G	20	40702
28 x 533	120	F4G	20	41900
28 x 533	150	F4G	20	42794

Abrasive cloth

CS 310 XF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	XF-cotton

Applications:

Stainless steel	●
Metals	●
NF metals	●
Steel	●

Advantages: Universal type for working on radiuses and contours with belt files in all areas of metalworking

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
6 x 610	40	F4G	25	4644
6 x 610	60	F4G	25	4645
6 x 610	80	F4G	25	4646
6 x 610	120	F4G	25	70595
6 x 610	240	F4G	25	379297
9 x 533	40	F4G	25	286879
9 x 533	60	F4G	25	156968
9 x 533	80	F4G	25	286880
9 x 533	120	F4G	25	286881
10 x 330	40	F4G	25	86104
10 x 330	60	F4G	25	71110
10 x 330	80	F4G	25	71111



►► Continuation of CS 310 XF, Abrasive cloth

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
10 x 330	100	F4G	25	71112
10 x 330	120	F4G	25	71957
12 x 520	40	F4G	25	160139
12 x 520	60	F4G	25	160201
12 x 520	80	F4G	25	159040
12 x 520	120	F4G	25	160140
13 x 450	40	F4G	25	90914
13 x 450	60	F4G	25	75505
13 x 450	80	F4G	25	97081
13 x 450	120	F4G	25	105794
13 x 455	40	F4G	25	72895
13 x 455	60	F4G	25	73099
13 x 455	80	F4G	25	149565
13 x 455	100	F4G	25	73176
13 x 455	120	F4G	25	74086
13 x 610	40	F4G	25	4652
13 x 610	60	F4G	25	4653
13 x 610	80	F4G	25	4654
13 x 610	120	F4G	25	70591
13 x 610	240	F4G	25	99182
20 x 520	40	F4G	25	71959
20 x 520	60	F4G	25	71960
20 x 520	80	F4G	25	71961
20 x 520	120	F4G	25	71963
40 x 303	60	F4G	10	184719
40 x 303	80	F4G	10	188885

Abrasive cloth, waterproof

CS 411 Y



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close
Backing	Y-polyester

Applications:

Stainless steel	●
Steel	●
Metals	●

Advantages: Tear-resistant product for use on belt files - Especially high aggressiveness and abrasive performance due to active abrasive substances - Especially for stainless steel, but also for steel and metal in general

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
9 x 533	40	F4G	25	286886
9 x 533	60	F4G	25	286887
9 x 533	80	F4G	25	286888
10 x 330	40	F4G	25	325250



File belts

Coated abrasives

►► Continuation of 411 Y, Abrasive cloth, waterproof

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
10 x 330	60	F4G	25	302797
10 x 330	80	F4G	25	302798
13 x 610	40	F4G	25	322530
13 x 610	60	F4G	25	302784
13 x 610	80	F4G	25	302785
20 x 520	36	F4G	25	322531
20 x 520	40	F4G	25	322532
20 x 520	60	F4G	25	302791
20 x 520	80	F4G	25	302792

CEVOLUTION

Abrasive cloth, multibond

CS 631 XF
CEVOLUTION



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Semi-open
Backing	XF-cotton

Applications:

Stainless steel	●
Titanium/Alloy	●

NEW



Advantages: Continuously aggressive abrasive performance, with long service life due to ceramic grit - Good adaptation to radiuses and contours - Prevents heat tinting on stainless steel due to multibond - The CS 631 XF includes the new CEVOLUTION technology. CEVOLUTION stands for holistically optimized, ceramic abrasives. Klingspor products with CEVOLUTION technology contain, among others, an optimized grit mix, grit sizes and formulation in order to offer the maximum performance in every application.

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
6 x 610	60	F4G	25	383423
6 x 610	80	F4G	25	379738
6 x 610	120	F4G	25	383422
10 x 330	60	F4G	25	379541
10 x 330	80	F4G	25	383424
10 x 330	120	F4G	25	379922
13 x 610	80	F4G	25	383419
13 x 610	120	F4G	25	344516
20 x 520	60	F4G	25	383421
20 x 520	80	F4G	25	379448
20 x 520	120	F4G	25	369948

Abrasive cloth

CS 710 XF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	XF-cotton

Applications:

Steel	●
Stainless steel	●
NF metals	●

Advantages: Machine grinding of molded parts and weld seams in trade and industry - Flexible, yet tear-resistant backing - Abrasive belt with hardened and tempered aluminium oxide


Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
9 x 533	80	F4G	25	342297
9 x 533	120	F4G	25	342296
10 x 330	80	F4G	25	342302
10 x 330	120	F4G	25	342303
13 x 455	80	F4G	25	342298
13 x 455	120	F4G	25	342299

Abrasive cloth

CS 911 X



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close
Backing	Cotton/polyester

Applications:

Stainless steel	●
Steel	●
Hardwood	●
NF metals	○

NEW !

Advantages: Self-sharpening ceramic grit for coarse and intermediate grinding in the steel and stainless steel processing industry and for parquet sanding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

All sizes and minimum purchasing quantities available on request

File belts

Coated abrasives

CEVOLUTION

Abrasive cloth, multibond

CS 920 Y ACT CEVOLUTION



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close
Backing	Y-polyester

Applications:

Stainless steel	●
High alloy steel	●

Advantages: Special product with Advanced Coating Technology (ACT) - Excellent grit adhesion - Highly tear-resistant polyester backing and self-sharpening ceramic grain for rough, and intermediate grinding of stainless steel and high alloyed steel at high loads - Higher service life and cool grinding due to special coating with active multibond - The CS 920 Y file belt includes the new CEVOLUTION technology. CEVOLUTION stands for holistically optimized, ceramic abrasives. Klingspor products with CEVOLUTION technology contain, among others, an optimized grit mix, grit sizes and formulation in order to offer the maximum performance in every application.


Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
13 x 610	40	F4G	25	659495
13 x 610	60	F4G	25	659479
13 x 610	80	F4G	25	365573
20 x 520	60	F4G	25	659488
20 x 520	80	F4G	25	659489
20 x 520	120	F4G	25	659948

Abrasive cloth, multibond

CS 913 X



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close
Backing	Cotton/polyester

Applications:

Stainless steel	●
High alloy steel	●
NF metals	●

NEW



Advantages: Continuously aggressive grinding behaviour - Long service life due to self-sharpening ceramic grit - The additional multibond provides a "cool grinding" in the processing of stainless steel and thus tempering colours are avoided - No premature clogging on aluminium

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

All sizes and minimum purchasing quantities available on request

Abrasive cloth, waterproof

CS 922 Y ACT CEVOLUTION



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close
Backing	Y-polyester

Applications:

Stainless steel	●
Steel	●

Advantages: Continuously aggressive grinding behaviour - Long service life due to self-sharpening ceramic grit - Very high grain adhesion thanks to Advanced Coating Technology and highly tear-resistant polyester backing - The CS 922 Y file belt includes the new CEVOLUTION technology. CEVOLUTION stands for holistically optimized, ceramic abrasives. Klingspor products with CEVOLUTION technology contain, among others, an optimized grit mix, grit sizes and formulation in order to offer the maximum performance in every application.

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
10 x 330	40	F4G	10	366762
10 x 330	60	F4G	10	366522
10 x 330	80	F4G	25	366761
10 x 330	120	F4G	25	366760
13 x 610	40	F4G	25	659480
13 x 610	60	F4G	25	659478
13 x 610	80	F4G	25	367273
20 x 520	36	F4G	10	367446
20 x 520	40	F4G	10	367544
20 x 520	60	F4G	10	365303
20 x 520	80	F4G	25	365304
20 x 520	120	F4G	25	365355

Short belts for hand held machines

Coated abrasives

Abrasive cloth

LS 309 XH



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	X-cotton

Applications:

Wood	●
Metals	●
NF metals	●
Paint/Varnish/Filler	●

Advantages: Special type for portable belt sanders - For universal use on wood, metal, paint and varnish - Large product mix of belts for all standard machines

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
60 x 400	60	F5	10	4100
60 x 400	80	F5	10	4104
60 x 400	120	F5	10	4097
65 x 410	40	F5	10	4106
65 x 410	60	F5	10	4114
65 x 410	80	F5	10	4120
65 x 410	100	F5	10	4124
65 x 410	120	F5	10	4128
75 x 457	40	F5	10	37269
75 x 457	60	F5	10	38825
75 x 457	80	F5	10	40345
75 x 457	100	F5	10	41560
75 x 457	120	F5	10	42627
75 x 457	150	F5	10	43020
75 x 480	40	F5	10	4098
75 x 480	60	F5	10	4107
75 x 480	80	F5	10	4115
75 x 480	100	F5	10	4121
75 x 480	120	F5	10	4125
75 x 508	40	F5	10	4099
75 x 508	60	F5	10	4103
75 x 508	80	F5	10	4117
75 x 508	100	F5	10	4118
75 x 533	40	F5	10	4137
75 x 533	60	F5	10	4139
75 x 533	80	F5	10	4140
75 x 533	100	F5	10	4141
75 x 533	120	F5	10	4142
75 x 533	150	F5	10	4143
75 x 533	180	F5	10	4144
75 x 533	240	F5	10	43614
75 x 610	40	F5	10	37285
75 x 610	60	F5	10	38842
75 x 610	80	F5	10	40365
75 x 610	100	F5	10	41576
75 x 610	120	F5	10	42642
100 x 560	40	F5	10	4151



Short belts for hand held machines

Coated abrasives



►► Continuation of LS 309 XH, Abrasive cloth

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
100 x 560	60	F5	10	4473
100 x 560	80	F5	10	4474
100 x 560	100	F5	10	4475
100 x 560	120	F5	10	4476
100 x 560	150	F5	10	4477
100 x 610	40	F5	10	4478
100 x 610	60	F5	10	4480
100 x 610	80	F5	10	4481
100 x 610	100	F5	10	4482
100 x 610	120	F5	10	4483
100 x 610	150	F5	10	4484
100 x 610	180	F5	10	43302
100 x 620	40	F5	10	6272
100 x 620	60	F5	10	6278
100 x 620	80	F5	10	6283
100 x 620	100	F5	10	6284
100 x 620	120	F5	10	6286
100 x 620	150	F5	10	6288
105 x 620	40	F5	10	4485
105 x 620	60	F5	10	4487
105 x 620	80	F5	10	4489
105 x 620	100	F5	10	4490
105 x 620	120	F5	10	4491
105 x 620	150	F5	10	4492
110 x 620	40	F5	10	6290
110 x 620	60	F5	10	6292
110 x 620	80	F5	10	6294
110 x 620	100	F5	10	6295
110 x 620	120	F5	10	6296

Belts with paper backing

Coated abrasives

Abrasive paper

PS 20 F



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	F-paper

Applications:

Metals	●
NF metals	●
Stainless steel	●
Steel	●

Advantages: Universal type for finish grinding of steel, stainless steel and other metals - High stock removal rate

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Abrasive paper, actively coated

PS 20 FW



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	F-paper

Applications:

Aluminium	●
NF metals	●
Composite materials	●

Advantages: Special product with improved clogging behaviour and significantly increased service life due to additional stearate coating - Specially for grinding aluminium and non-ferrous metals

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Abrasive paper

PS 21 F



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close
Backing	F-paper

Applications:

Stainless steel	●
Metals	●
Steel	●

Advantages: High aggressiveness and long service life due to self-sharpening zirconia alumina - Specially developed for rough grinding through finish grinding of stainless steel surfaces

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request


Belts with paper backing

Coated abrasives



Abrasive paper, ANTISTATIC

PS 22 F ACT



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	F-paper

Applications:

Wood	●	Plastic	●
Metals	○		
NF metals	○		
Paint/Varnish/Filler	○		

Advantages: High removal rate, fine surface scratch pattern - Specially developed for finish grinding of hardwood - Reduced clogging and longer service life due to ACT recipe and antistatic properties


Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Abrasive paper, ANTISTATIC

PS 524 E



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	E-paper

Applications:

Paint/Varnish/Filler	●
Plastic	●
Wood	○

Advantages: Universal belt for hard and tough workpiece surfaces - Fine sanding pattern in the wood and furniture industry - Long service life due to antistatic equipment - Very good price-performance ratio


Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Abrasive paper, ANTISTATIC

PS 24 F ACT



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	F-paper

Applications:

Paint/Varnish/Filler	●
Plastic	●
Wood	○

Advantages: For hard and tough surfaces - Finely sanded and varnish surfaces in the wood and furniture industry - Long service life due to ACT recipe and antistatic properties

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Belts with paper backing

Coated abrasives

Abrasive paper, ANTISTATIC

PS 27 DW



Properties

Bonding agent	Resin
Grain	SiC
Coating	Open
Backing	D-paper

Applications:

Paint/Varnish/Filler	●
Aluminium	●
Plastic	○

Advantages: Special product for high-quality varnish surfaces, especially UV finishes - Substantially reduced clogging and longer service life due to additional special coating - Very fine surface scratch pattern


Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Abrasive paper, ANTISTATIC

PS 28 F



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Open
Backing	F-paper

Applications:

Wood	●
------	---

Advantages: Universal belt for general woodworking, especially softwood - Excellent price-performance ratio

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request


Belts with paper backing

Coated abrasives



Abrasive paper, ANTISTATIC

PS 29 F ACT



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Open
Backing	F-paper

Applications:

Wood	●
------	---

Advantages: High-quality universal belt for general woodworking, especially softwood - Reduced clogging and longer service life due to ACT recipe and antistatic properties

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
150 x 2000	80	F5	10	307797
150 x 2000	100	F5	10	307798
150 x 2000	120	F5	10	307799
150 x 2170	80	F5	10	307800
150 x 2170	120	F5	10	307801
150 x 2250	60	F5	10	307802
150 x 2250	80	F5	10	307803
150 x 2250	100	F5	10	307804
150 x 2250	120	F5	10	307805
150 x 2250	150	F5	10	307806
150 x 2280	80	F5	10	307807
150 x 2280	100	F5	10	307808
150 x 2280	120	F5	10	307809
150 x 2600	80	F5	10	307811
150 x 2600	100	F5	10	307812
150 x 2600	120	F5	10	307813
150 x 3000	80	F5	10	307814
150 x 3000	100	F5	10	307815
150 x 3000	120	F5	10	307816
150 x 6800	80	F2	10	307821
150 x 6800	100	F2	10	307822
150 x 6800	120	F2	10	307823
150 x 6880	80	F2	10	307824
150 x 6880	100	F2	10	307825
150 x 6880	120	F2	10	307826
150 x 7100	60	F2	10	307828
150 x 7100	80	F2	10	307829
150 x 7100	100	F2	10	307830
150 x 7100	120	F2	10	307831
150 x 7100	150	F2	10	307832
150 x 7200	80	F2	10	307833
150 x 7200	100	F2	10	307834
150 x 7200	120	F2	10	307835
150 x 7500	80	F2	10	307837
150 x 7500	100	F2	10	307838
150 x 7500	120	F2	10	307839
150 x 7800	80	F2	10	307840



Belts with paper backing

Coated abrasives

►► Continuation of 29 F ACT, Abrasive paper, ANTISTATIC

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
150 x 7800	100	F2	10	307841
150 x 7800	120	F2	10	307842
150 x 7800	150	F2	10	307843
200 x 1600	80	F5	10	307844
200 x 1600	100	F5	10	307845
200 x 1600	120	F5	10	307846
200 x 3000	80	F5	10	307847
200 x 3000	100	F5	10	307848
200 x 3000	120	F5	10	307849

CEVOLUTION

Abrasive paper

PS 61 F
CEVOLUTION



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close
Backing	F-paper

Applications:

Stainless steel	●
Steel	●
Wood	○

Advantages: Continuously aggressive abrasive behaviour due to micro-crystalline and self-sharpening ceramic grit - High-performance abrasive belt for stainless steel finish grinding - The PS 61 F belt includes the new CEVOLUTION technology. CEVOLUTION stands for holistically optimized, ceramic abrasives. Klingspor products with CEVOLUTION technology contain, among others, an optimized grit mix, grit sizes and formulation in order to offer the maximum performance in every application.


Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Abrasive paper, KULEX

PS 729 F



Properties

Bonding agent	Resin
Grain	Al. oxide agglom.
Coating	Close
Backing	F-paper

Applications:

Stainless steel	●
Steel	●

Advantages: Long life belt for dry grinding applications - Extremely high service life - Constant surface quality for pre-grinding until finishing - Especially developed for grinding with intermediate contact pressure

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Belts with film backing

Coated abrasives



Abrasive film, active coated

FP 73 W



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	Film

Applications:

Paint/Varnish/Filler	●
Plastic	●

Advantages: Special product for processing varnish, plastic and composites - Highly tear-resistant film backing - Abrasive belt with extremely good adaptation, smooth surface and excellent grit adhesion - Substantially reduced clogging and significantly longer service life

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Abrasive film with velour backing, waterproof

FP 77 K T-ACT



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	Film

Applications:

Paint/Varnish/Filler	●	Composite materials	●
Primer	●	Plastic	●
Filler	●		
Gel coats	●		

Advantages: New high-performance product with optimized clogging behaviour - Increased service life due to the new coating, which prevents the adhesion of paint and dust particles - For fine sanding in the fine grit range 240 - 2000, a highly flexible and completely flat film backing is used for highest surface quality - Soft grinding thanks to damping velour backing

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request


NEW !

Belts with cloth backing

Coated abrasives

Abrasive cloth

CS 308 Y



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	Y-polyester

Applications:

Stainless steel	●	Plastic	①
Wood	●		
Steel	●		
NF metals	●		

Advantages: Tear-resistant universal abrasive cloth for metalworking and for hardwood finish grinding - Excellent removal rate under high stress


Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

All sizes and minimum purchasing quantities available on request

Abrasive cloth

LS 309 X



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	X-cotton

Applications:

Metals	●
NF metals	●
Wood	●

Advantages: Universal belt for metalworking and woodworking - Excellent price-performance ratio

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
50 x 1020	40	F5	10	36837
50 x 1020	60	F5	25	38075
50 x 1020	80	F5	25	39401
50 x 1020	100	F5	25	40832
50 x 1020	120	F5	25	42020
50 x 2000	40	F4G	10	4502
50 x 2000	60	F4G	25	4531
50 x 2000	80	F4G	25	4548
75 x 2000	40	F4G	10	36923
75 x 2000	60	F4G	10	38198
75 x 2000	80	F4G	10	39556
100 x 800	60	F5	10	38286
100 x 800	80	F5	10	39659
100 x 800	120	F5	10	137024
100 x 860	60	F5	10	38895
100 x 860	80	F5	10	40425
100 x 860	100	F5	10	41621
100 x 860	120	F5	10	42678



Belts with cloth backing

Coated abrasives




►► Continuation of LS 309 X, Abrasive cloth

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
100 x 900	60	F5	10	38898
100 x 900	80	F5	10	40428
100 x 900	100	F5	10	41623
100 x 900	120	F5	10	42679
100 x 915	40	F5	10	37324
100 x 915	60	F5	10	38900
100 x 915	80	F5	10	40430
100 x 915	100	F5	10	41625
100 x 915	120	F5	10	42681
100 x 915	150	F5	10	43054
100 x 915	180	F5	10	43308
100 x 915	240	F5	10	128755
100 x 950	40	F5	10	37328
100 x 950	60	F5	10	38904
100 x 950	80	F5	10	40435
100 x 950	100	F5	10	41627
100 x 950	120	F5	10	42684
100 x 1000	40	F5	10	36999
100 x 1000	60	F5	10	38304
100 x 1000	80	F5	10	39679
100 x 1000	100	F5	10	41019
100 x 1000	120	F5	10	42199
150 x 1220	60	F5	10	38428
150 x 1220	80	F5	10	39852
150 x 2000	40	F4G	10	37071
150 x 2000	60	F4G	10	38460
150 x 2000	80	F4G	10	39884

Abrasive cloth

LS 309 J



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	J-cotton

Applications:

Metals	●
NF metals	●
Wood	●

Advantages: Good abrasive performance for working on slight contours on metal and wood

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000


All sizes and minimum purchasing quantities available on request

Belts with cloth backing

Coated abrasives

Abrasive cloth

LS 309 JF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	JF-cotton

Applications:

Metals	●
NF metals	●
Wood	●

Advantages: High removal rate in metalworking and woodworking - Very good adaptation to radiuses and contours due to highly flexible cotton backing


Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

All sizes and minimum purchasing quantities available on request

Abrasive cloth

CS 310 X



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	X-cotton

Applications:

Stainless steel	●	Plastic	○
Wood	●		
Steel	●		
NF metals	●		

Advantages: High-quality universal type for metalworking and woodworking - Good removal rate under high stress

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
25 x 1065	60	F4G	10	244635
25 x 1065	80	F4G	10	244634
50 x 1020	40	F5	10	47753
50 x 1020	60	F5	25	48549
50 x 1020	80	F5	25	49300
50 x 2000	40	F4G	10	4587
50 x 2000	60	F4G	25	4590
50 x 2000	80	F4G	25	4591
50 x 2000	120	F4G	25	4593
75 x 2000	36	F4G	10	4594
75 x 2000	40	F4G	10	4595
75 x 2000	60	F4G	25	4596
75 x 2000	80	F4G	25	49399
75 x 2000	120	F4G	25	50652
75 x 2000	180	F4G	25	51222
75 x 2000	240	F4G	25	51470
100 x 920	60	F5	10	48717
100 x 920	80	F5	10	49454



Belts with cloth backing

Coated abrasives



►► Continuation of CS 310 X, Abrasive cloth

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
100 x 920	100	F5	10	50136
150 x 2000	36	F4G	10	47492
150 x 2000	40	F4G	10	47921
150 x 2000	60	F4G	10	48821
150 x 2000	80	F4G	10	49581
150 x 2000	120	F4G	10	50767
200 x 550	40	F7G	10	97832
200 x 550	60	F7G	10	105992
200 x 550	80	F7G	10	123929
200 x 550	120	F7G	10	123931
200 x 750	24	F7G	10	47101
200 x 750	36	F7G	10	47561
200 x 750	40	F7G	10	48028
200 x 750	60	F7G	10	48970
200 x 750	80	F7G	10	49764
200 x 750	100	F7G	10	50340
200 x 750	120	F7G	10	50872
200 x 1500	60	F4G	10	48858
200 x 1500	80	F4G	10	49634

Abrasive cloth

CS 310 XF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	XF-cotton

Applications:

Steel	●	Plastic	●
Stainless steel	●		
NF metals	●		
Wood	●		

Advantages: Flexible, tear-resistant universal product for processing lightly profiled or shaped metal parts

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------


All sizes and minimum purchasing quantities available on request

Belts with cloth backing

Coated abrasives

Abrasive cloth ANTISTATIC

CS 311 Y ACT



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Open
Backing	Y-polyester

Applications:

Wood	●
Metals	●

Advantages: Good removal rate for working on wood under high stress - Minimal clogging and long service life due to ACT recipe and antistatic properties


Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

All sizes and minimum purchasing quantities available on request

Abrasive cloth

LS 312 JF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	JF-cotton

Applications:

Stainless steel	●	Wood	●
Metals	●		
NF metals	●		
Steel	●		

Advantages: Outstanding removal rate and service life due to active abrasive substances - Very good adaptation to radiuses and contours due to highly flexible cotton backing

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
40 x 760	80	F4G	10	660275
40 x 760	120	F4G	10	660274
40 x 760	240	F4G	10	660273
40 x 815	80	F4G	10	660269
40 x 815	120	F4G	10	660280
40 x 815	240	F4G	10	660271
300 x 3500	100	F1	10	79849
300 x 3500	150	F1	10	247873
300 x 3500	280	F1	10	79850
300 x 3500	320	F1	10	83657
300 x 3500	400	F1	10	81147

Belts with cloth backing

Coated abrasives



Abrasive cloth, multibond

LS 313 JF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	JF-cotton

Applications:

Stainless steel	●
Aluminium	●
NF metals	○

Advantages: Top product for working on temperature-sensitive molded parts - Very good adaptation to radiuses and contours due to highly flexible cotton backing - Cool grinding due to additional multibond

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Abrasive cloth

LS 314 JF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	JF-cotton

Applications:

Metals	●
Plastic	●
NF metals	●
Aluminium	●

Advantages: Specialized product with stearate coating to reduce clogging during work on lightly and heavily profiled parts made of brass, aluminum and composite materials (plastic/stainless steel or wood/stainless steel)

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Abrasive cloth ANTISTATIC, SUPERFLEX

LS 318 JF ACT



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Open
Backing	JF-cotton

Applications:

Wood	●
------	---

Advantages: Top product for working on profiles and contours, especially in woodworking - Outstanding adaptation, also to tight radiuses, due to highly flexible cotton backing - Reduced clogging and long service life due to the ACT recipe

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Belts with cloth backing


Coated abrasives

CEVOLUTION

NEW

Abrasive cloth

LS 912 JF CEVOLUTION



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close
Backing	JF-cotton

Applications:

Stainless steel	●
NF metals	●
Metals	●

Advantages: Special product with highly flexible cotton backing for processing non-ferrous metals, stainless steel and steel - Continuously aggressive grinding behaviour due to self-sharpening ceramic grain and grinding-active additives - Grinding of heavily profiled workpieces in the metal industry - The LS 912 JF belt includes the new CEVOLUTION technology. CEVOLUTION stands for holistically optimized, ceramic abrasives. Klingspor products with CEVOLUTION technology contain, among others, an optimized grit mix, grit sizes and formulation in order to offer the maximum performance in every application.

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
40 x 760	80	F4G	10	664369
40 x 760	120	F4G	10	664371
40 x 760	240	F4G	10	664372
40 x 815	80	F4G	10	664367
40 x 815	120	F4G	10	664368
40 x 815	240	F4G	10	664370

Abrasive cloth, waterproof

CS 320 Y



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	Y-polyester

Applications:

Glass/Stone	●
Mineral based materials	●
Plastic	●

Advantages: Outstanding abrasive performance on hard and difficult-to-machine materials - Ideal for high stress - Can be used wet or dry

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

All sizes and minimum purchasing quantities available on request


Belts with cloth backing

Coated abrasives



Abrasive cloth, waterproof

CS 321 X



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	X-cotton

Applications:

Glass/Stone	●
Mineral based materials	●
Plastic	●

Advantages: Outstanding abrasive performance on hard and difficult-to-machine materials - Ideal for wet grinding, but also suitable for dry grinding


Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Abrasive cloth, waterproof

CS 322 X



Properties

Bonding agent	Resin
Grain	Cork
Backing	X-cotton

Applications:


Glass/Stone	●
-------------	---

Advantages: Special product for polishing glass with high quality cork/resin coating - Long life with consistent polishing effect - Waterproof

All sizes and minimum purchasing quantities available on request

Abrasive cloth, KULEX

CS 325 Y



Properties

Bonding agent	Resin
Grain	SiC agglom.
Coating	Close
Backing	Y-polyester

Applications:

Stainless steel	●
Glass/Stone	●
Metals	●

Advantages: Long-life abrasive belt for a brilliant, glossy finish, under medium to high grinding pressure - Extremely long life, with consistent surface roughness and finish - Suitable for dry and wet grinding

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000


All sizes and minimum purchasing quantities available on request

Belts with cloth backing

Coated abrasives

Abrasive cloth, KULEX

CS 326 Y



Properties

Bonding agent	Resin
Grain	Al. oxide agglom.
Coating	Close
Backing	Y-polyester

Applications:

Stainless steel	●
Steel	●

Advantages: Long-life abrasive belt for a satin surface scratch pattern, under medium to high grinding pressure - Extremely long life, with consistent surface roughness and finish - Suitable for wet grinding


Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
150 x 2500	80	F4G	10	316029
150 x 2500	120	F4G	10	316030
150 x 2500	180	F4G	10	316031
150 x 2500	240	F4G	10	316032
150 x 2500	320	F4G	10	316033
150 x 2500	400	F4G	10	316034
150 x 2500	600	F4G	10	351663
150 x 3500	60	F4G	10	326160
150 x 3500	80	F4G	10	296966
150 x 3500	120	F4G	10	339200
150 x 3500	180	F4G	10	344113
150 x 3500	240	F4G	10	110506
150 x 3500	320	F4G	10	335266
150 x 3500	400	F4G	10	344346

Abrasive cloth, KULEX

CS 329 JF



Properties

Bonding agent	Resin
Grain	Al. oxide agglom.
Coating	Close
Backing	JF-cotton

Applications:

Stainless steel	●
Steel	●

Advantages: Long-life abrasive belt for a satin surface scratch pattern, under low to medium grinding pressure - Very suitable for strongly profiled workpieces - Especially suitable for dry grinding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

All sizes and minimum purchasing quantities available on request


Belts with cloth backing

Coated abrasives



Abrasive cloth, KULEX

CS 329 Y



Properties

Bonding agent	Resin
Grain	Al. oxide agglom.
Coating	Close
Backing	Y-polyester

Applications:

Stainless steel	●
Steel	●

Advantages: Long-life abrasive belt for a satin surface scratch pattern, under low to medium grinding pressure - Especially suitable for dry grinding


Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Abrasive cloth, waterproof

CS 330 X



Properties

Bonding agent	Resin
Grain	SiC/Cork
Coating	Close
Backing	X-cotton

Applications:

Stainless steel	●
Steel	●

Advantages: Soft, very fine grinding with low surface roughness, polishable - Special belt for satin final finishing of stainless steel and steel surfaces with cork granulate with SiC/resin coating


Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Abrasive cloth

CS 333 X



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	X-cotton

Applications:

Glass/Stone	●
Plastic	●
Metals	●

Advantages: Ideal for dry grinding of very hard or difficult-to-machine materials (castings, scales, ceramic, rubber, plastic)

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000


All sizes and minimum purchasing quantities available on request

Belts with cloth backing

Coated abrasives

Abrasive cloth

CS 333 XF



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	XF-cotton

Applications:

Metals	●
NF metals	●
Plastic	●

Advantages: Long service life and high abrasive performance - Top product for robot grinding of brass fittings - Optimal combination of flexibility and tear resistance

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Abrasive cloth

CS 333 JF



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	JF-cotton

Applications:

NF metals	●
Metals	●
Plastic	●

Advantages: Long service life and high abrasive performance - Very good adaptation to radiuses and contours due to highly flexible cotton backing - Ideal for hand grinding of brass fittings and other molded parts


Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Abrasive cloth, waterproof

CS 341 X



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	X-cotton

Applications:

Metals	●
Stainless steel	●
Steel	●
NF metals	●

Advantages: High-quality universal type for wet grinding - Good service life and fine finish - Especially for rough through fine grinding in centreless and surface grinding applications

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Belts with cloth backing


Coated abrasives



Belts

Abrasive cloth, multibond

CS 409 Y



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close
Backing	Y-polyester

Applications:

Stainless steel	●
NF metals	ⓘ

Advantages: Aggressive abrasive behaviour - Cool grinding and increased grinding performance on stainless steel and high-alloy steels due to additional multibond - Very long service life also when used for grinding of non-ferrous metals


Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

All sizes and minimum purchasing quantities available on request

Abrasive cloth, multibond

CS 410 X



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	X-cotton

Applications:

Stainless steel	●
NF metals	ⓘ

Advantages: Cool grinding and no heat tinting due to additional multibond - Increased abrasive performance for use on stainless steel

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------


Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
50 x 450	60	F4G	25	53108
50 x 450	80	F4G	25	53267
50 x 450	120	F4G	25	53538

Belts with cloth backing

Coated abrasives

Abrasive cloth

CS 411 X



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close
Backing	X-cotton

Applications:

Stainless steel	●
Steel	●
Metals	●

Advantages: High aggressiveness and abrasive performance in rough grinding of steel and stainless steel - Very versatile in all areas of metalworking

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
50 x 2000	36	F4G	10	26419
50 x 2000	40	F4G	10	26593
50 x 2000	60	F4G	25	72251
50 x 2000	80	F4G	25	26943
50 x 2000	120	F4G	25	103997
75 x 2000	24	F4G	10	4618
75 x 2000	36	F4G	10	4619
75 x 2000	40	F4G	10	4620
75 x 2000	60	F4G	10	4622
75 x 2000	80	F4G	10	26969
75 x 2000	120	F4G	10	113664
90 x 395	40	F4G	10	373572
90 x 395	60	F4G	10	373450
90 x 395	80	F4G	10	372956
90 x 395	120	F4G	10	372955
100 x 283	40	F4G	10	363188
100 x 283	60	F4G	10	373299
100 x 283	80	F4G	10	363194
100 x 283	120	F4G	10	363199
100 x 2000	36	F4G	10	26463
150 x 2000	36	F4G	10	26488
150 x 2000	40	F4G	10	26668
150 x 2000	60	F4G	10	72775
150 x 2000	80	F4G	10	27030
150 x 2000	120	F4G	10	101308


Belts with cloth backing

Coated abrasives



Abrasive cloth, waterproof

CS 411 Y



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close
Backing	Y-polyester

Applications:

Stainless steel	●
Steel	●
Metals	●

Advantages: Tear-resistant high-performance belt - Especially high aggressiveness and abrasive performance due to active abrasive substances - Especially for stainless steel, but also for steel and metal in general


Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
75 x 2000	24	F4G	10	62056
75 x 2000	36	F4G	10	62150
75 x 2000	40	F4G	10	62509
75 x 2000	50	F4G	10	62604
75 x 2000	60	F4G	10	62938
75 x 2000	80	F4G	10	63068
75 x 2000	120	F4G	10	20598
150 x 2000	36	F4G	10	62176
150 x 2000	40	F4G	10	62537
150 x 2000	60	F4G	10	62971
150 x 2000	80	F4G	10	63102
150 x 2000	120	F4G	10	278219

Abrasive cloth, waterproof

CS 412 Y



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	Y-polyester

Applications:

Metals	●	Wood	●
NF metals	●		
Stainless steel	●		
Steel	●		

Advantages: High-quality universal type for wet and dry grinding of stainless steel, steel and other metal surfaces

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------


All sizes and minimum purchasing quantities available on request

Belts with cloth backing

Coated abrasives

Abrasive cloth, waterproof

CS 416 Y



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Semi-open
Backing	Y-polyester

Applications:

Stainless steel	●
Plastic	●
NF metals	●

Advantages: Very high aggressiveness and abrasive performance - Long service life also when used on materials that cause clogging

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
75 x 2000	36	F4G	10	204858
75 x 2000	40	F4G	10	205377
75 x 2000	60	F4G	10	207651
75 x 2000	80	F4G	10	220805
150 x 2000	36	F4G	10	231336
150 x 2000	40	F4G	10	205474
150 x 2000	60	F4G	10	204213
150 x 2000	80	F4G	10	205130

Abrasive cloth, NOPPEX

CS 420 Y



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Backing	Y-polyester

Applications:

Stainless steel	●
Steel	●

Advantages: Long-life abrasive belt with knob structure for a satin surface scratch pattern, under high to medium grinding pressure - Very suitable for centreless circular and surface grinding - Suitable for dry and wet grinding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

All sizes and minimum purchasing quantities available on request

Belts with cloth backing

Coated abrasives



Abrasive cloth

GX 533 JF



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	JF-blended cloth

Applications:

NF metals	●
Plastic	●
Metals	●
Titanium/Alloy	●

Mineral based materials ●

Advantages: Special product for use on brass (sanitary fittings) and titanium (surgical instruments) - Good adaptation to radiuses and contours - High process reliability in robot applications or working with unsupported belts due to highly tear resistant blended fabric backing

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

CEVOLUTION

Abrasive cloth, multibond

CS 631 XF CEVOLUTION



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Semi-open
Backing	XF-cotton

Applications:

Stainless steel	●
Titanium/Alloy	●

Advantages: Continuously aggressive abrasive performance, with long service life due to ceramic grit - Good adaptation to radiuses and contours - Prevents heat tinting on stainless steel due to multibond - The CS 631 XF includes the new CEVOLUTION technology. CEVOLUTION stands for holistically optimized, ceramic abrasives. Klingspor products with CEVOLUTION technology contain, among others, an optimized grit mix, grit sizes and formulation in order to offer the maximum performance in every application.

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Belts with cloth backing

Coated abrasives

Abrasive cloth

CS 710 XF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	XF-cotton

Applications:

Steel	●
Stainless steel	●
NF metals	●

Advantages: Machine grinding of surfaces or molded parts in trade and industry - Flexible, yet tear-resistant backing


Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Abrasive cloth

GX 712 JF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	JF-blended cloth

Applications:

NF metals	●
Stainless steel	●
Steel	●
Metals	●

Advantages: Active abrasive substances ensure outstanding abrasive performance - Special product for tough/hard and heat-sensitive materials - Good adaptation to radiuses and contours - High process reliability in robot applications or working with unsupported belts due to highly tear resistant blended fabric backing

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request


Belts with cloth backing

Coated abrasives



Abrasive cloth, waterproof

CS 729 X



Properties

Bonding agent	Resin
Grain	Al. oxide agglom.
Coating	Close
Backing	X-cotton

Applications:

Stainless steel	●
Steel	●

Advantages: Long life abrasive belt for wet and dry sanding with exceptionally long service life - For a satin surface scratch pattern with uniform surface quality - Specially developed for surface grinding at medium contact pressure - Optimum workpiece adaptation due to semi-flexible and tear-resistant cotton backing


Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Abrasive cloth

CS 757 JF



Properties

Bonding agent	Resin
Grain	Al. oxide agglom.
Coating	Open
Backing	JF-cotton

Applications:

Stainless steel	●
Steel	●

Advantages: Long life abrasive belt for dry sanding with particularly long service life and consistent surface quality - The open coating ensures very aggressive sanding behavior until the end of the service life - The highly flexible cotton backing makes it very suitable for sanding heavily profiled workpieces

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Abrasive cloth, waterproof

CS 811 Y ACT



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close
Backing	Y-polyester

Applications:

Die-cast aluminium	●
Stainless steel	●
Steel	●

Advantages: High aggressiveness and abrasive performance - Developed for applications under high stress - Especially good grain adhesion and service life due to ACT recipe

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Belts with cloth backing

Coated abrasives

Abrasive cloth

CS 911 X

NEW !



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close
Backing	Cotton/polyester

Applications:

Stainless steel	●
Steel	●
Hardwood	●
NF metals	●

Advantages: Self-sharpening ceramic grit for coarse and intermediate grinding in the steel and stainless steel processing industry and for parquet sanding

Available grits:


16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Abrasive cloth, multibond

CS 913 X

NEW !



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close
Backing	Cotton/polyester

Applications:

Stainless steel	●
High alloy steel	●
NF metals	●

Advantages: Continuously aggressive grinding behaviour - Long service life due to self-sharpening ceramic grit - The additional multibond provides a "cool grinding" in the processing of stainless steel and thus tempering colours are avoided - No premature clogging on aluminium

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Belts with cloth backing


Coated abrasives



CEVOLUTION

Abrasive cloth, multibond

CS 920 Y ACT CEVOLUTION



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close
Backing	Y-polyester

Applications:

Stainless steel	●
High alloy steel	●

Advantages: Special product with Advanced Coating-Technology (ACT) - Excellent grit adhesion - Highly tear-resistant polyester backing and self sharpening ceramic grain for rough, and intermediate grinding of stainless steel and high alloyed steel at high loads - Higher service life and cool grinding due to special coating with active multibond - The CS 920 Y belt includes the new CEVOLUTION technology. CEVOLUTION stands for holistically optimized, ceramic abrasives. Klingspor products with CEVOLUTION technology contain, among others, an optimized grit mix, grit sizes and formulation in order to offer the maximum performance in every application.

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
75 x 2000	36	F4G	10	365457
75 x 2000	40	F4G	10	365526
75 x 2000	60	F4G	10	365498
75 x 2000	80	F4G	10	365487
75 x 2000	120	F4G	10	659947

CEVOLUTION

Abrasive cloth, waterproof

CS 922 Y ACT CEVOLUTION



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close
Backing	Y-polyester

Applications:

Stainless steel	●
Steel	●

Advantages: Continuously aggressive grinding behaviour - Long service life due to self-sharpening ceramic grit - Very high grain adhesion thanks to Advanced Coating Technology and highly tear-resistant polyester backing - The CS 922 Y belt includes the new CEVOLUTION technology. CEVOLUTION stands for holistically optimized, ceramic abrasives. Klingspor products with CEVOLUTION technology contain, among others, an optimized grit mix, grit sizes and formulation in order to offer the maximum performance in every application.

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
40 x 760	60	F4G	10	370642
40 x 760	80	F4G	10	370644
40 x 760	120	F4G	10	370269
40 x 815	60	F4G	10	652726
40 x 815	80	F4G	10	382472
40 x 815	120	F4G	10	659700
75 x 2000	36	F4G	10	365302
75 x 2000	40	F4G	10	365344



Belts with cloth backing

Coated abrasives

► Continuation of CS 922 Y ACT CEVOLUTION, Abrasive cloth, waterproof

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
75 x 2000	60	F4G	10	370699
75 x 2000	80	F4G	10	370700
75 x 2000	120	F4G	10	370702
100 x 283	40	F4G	10	369337
100 x 283	60	F4G	10	366770
100 x 283	80	F4G	10	366769
100 x 283	120	F4G	10	367461

CEVOLUTION

Abrasive cloth, multibond

CS 931 JF CEVOLUTION



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Semi-open
Backing	JF-cotton

Applications:

Stainless steel	●
Titanium/Alloy	●

Advantages: Special product with high flexible backing for the processing of stainless steel and high-alloyed steel - Continuously aggressive grinding properties with high lifetime due to semiopen coated self-sharpening ceramic grain - Very good adaptability to radiuses and edges through high flexible backing - The additional multibond provides a "cool grinding" in the processing of stainless steel and thus tempering colours are avoided - The CS 931 JF includes the new CEVOLUTION technology. CEVOLUTION stands for holistically optimized, ceramic abrasives. Klingspor products with CEVOLUTION technology contain, among others, an optimized grit mix, grit sizes and formulation in order to offer the maximum performance in every application.

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

CEVOLUTION

Abrasive cloth, multibond

GX 931 JF CEVOLUTION



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Semi-open
Backing	JF-blended cloth

Applications:

Stainless steel	●
Titanium/Alloy	●

Advantages: Special product with flexible and tear resistant backing for the processing of stainless steel and high-alloyed steel - Continuously aggressive grinding properties with high lifetime due to semi-open coated self-sharpening ceramic grain - Good adaptability on radiuses and edges through flexible backing - High process reliability in robot applications or grinding slack of the belt because of extremely tear resistant polycotton backing - The additional multibond provides a cool grinding in the processing of stainless steel and avoids tempering colours - The GX 931 JF includes the new CEVOLUTION technology. CEVOLUTION stands for holistically optimized, ceramic abrasives. Klingspor products with CEVOLUTION technology contain, among others, an optimized grit mix, grit sizes and formulation in order to offer the maximum performance in every application.

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request


Belts with cloth backing

Coated abrasives



Abrasive cloth

CS 959 JF



Properties

Bonding agent	Resin
Grain	Ceramic agglomerate
Coating	Semi-open
Backing	JF-cotton

Applications:

Stainless steel	●
Steel	●

Advantages: Long life abrasive belt for dry sanding with particularly long service life and consistent surface quality - With newly developed ceramic agglomerates for even more aggressive sanding behaviour - Perfectly suited for sanding heavily profiled workpieces thanks to the highly flexible cotton backing

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000


All sizes and minimum purchasing quantities available on request

Abrasive sleeves

Coated abrasives

Abrasive cloth

CS 310 X



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	X-cotton

Applications:

Metals	●
Plastic	○

Advantages: Tear-resistant cloth with reinforced backing - Spiral shaped joint, cylindrical form - Universal applications in metalworking - High aggressiveness when used with rubber drum GK 555

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Width in mm	Grit	Packing unit/pcs.	Cat. number
10 x 20	80	50	11555
10 x 20	150	50	11554
13 x 25	50	50	28188
13 x 25	80	50	11558
15 x 30	50	50	11568
15 x 30	80	50	11567
15 x 30	150	50	11566
22 x 20	50	50	11571
22 x 20	80	50	11570
22 x 20	150	50	11569
30 x 20	50	50	11574
30 x 20	80	50	11573
30 x 30	50	50	11577
30 x 30	80	50	11576
30 x 30	150	50	11575
45 x 30	50	50	11580
45 x 30	80	50	11579
45 x 30	150	50	11578
60 x 30	50	25	11583
60 x 30	80	25	11582
60 x 30	150	25	11581
75 x 30	50	25	11586
75 x 30	80	25	11585

Abrasive sleeves


Coated abrasives



Belts

Abrasive cloth

CS 310 X



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	X-cotton

Applications:

Metals	●
Plastic	○

Advantages: Tear-resistant cloth with reinforced backing - Spiral shaped joint, conical form - Universal applications in metalworking - High aggressiveness when used with rubber drum GK 555 A


Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter 1 x Diameter 2 x Width in mm	Grit	Packing unit/pcs.	Cat. number
22 x 29 x 30	50	50	11592
22 x 29 x 30	80	50	11591
22 x 36 x 60	50	50	11595
22 x 36 x 60	80	50	11594
22 x 36 x 60	150	50	11593

Abrasive cloth, multibond

CS 451 X



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close
Backing	X-cotton

Applications:

Stainless steel	●
-----------------	---

Advantages: Tear-resistant cloth with reinforced backing - Spiral shaped joint, cylindrical form - High-quality zirconia alumina with multibond especially suited for working on stainless steel - High aggressiveness when used with rubber drum GK 555

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Width in mm	Grit	Packing unit/pcs.	Cat. number
30 x 20	40	50	334246
30 x 20	60	50	255475
45 x 30	40	50	334247
45 x 30	60	50	255476
60 x 30	40	25	334248
60 x 30	60	25	255626

Rubber drums

Rubber drums

GK 555



Advantages: Reusable rubber drum for cylindrical abrasive sleeves CS 310 X and CS 451 X - Mounting and dismounting by a light turn

Diameter x Width x Shaft in mm	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
10 x 20 x 6	30 m/s	44000 rpm	1	14843
13 x 25 x 6	30 m/s	44000 rpm	1	14845
15 x 30 x 6	30 m/s	36000 rpm	1	14847
22 x 20 x 6	30 m/s	26000 rpm	1	14848
30 x 20 x 6	30 m/s	19100 rpm	1	14849
30 x 30 x 6	30 m/s	19100 rpm	1	14850
45 x 30 x 6	30 m/s	12700 rpm	1	14851
60 x 30 x 6	30 m/s	9500 rpm	1	14852
75 x 30 x 8	30 m/s	7600 rpm	1	14853

Rubber drums

GK 555 A



Advantages: Reusable rubber drum for cone-shaped abrasive sleeves CS 310 X - Mounting and dismounting by a light turn

Diameter 1 x Diameter 2 x Height x Shaft in mm	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
22 x 29 x 30 x 6	30 m/s	26000 rpm	1	14855
22 x 36 x 60 x 6	30 m/s	26000 rpm	1	14856

Wide belts with paper backing

Coated abrasives



Abrasive paper

PS 20 F



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	F-paper

Applications:

Stainless steel	●
Metals	●
NF metals	●
Steel	①

Advantages: Universal product for stainless steel finish grinding - High cutting rate

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Abrasive paper, actively coated

PS 20 FW



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	F-paper

Applications:

Aluminium	●
NF metals	●
Composite materials	●

Advantages: Special product with improved clogging behaviour and significantly increased service life due to additional stearate coating - Specially for grinding aluminium and non-ferrous metals

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Wide belts with paper backing

Coated abrasives

Abrasive paper

PS 21 F



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close
Backing	F-paper

Applications:

Stainless steel	●
Metals	●
Steel	●

Advantages: Aggressive abrasive behaviour due to self-sharpening zirconia alumina - Optimal recipe for rough grinding and finish grinding of stainless steel



Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Abrasive paper, ANTISTATIC

PS 22 F ACT



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	F-paper

Applications:

Wood	●	Plastic	⦿
Metals	⦿		
NF metals	⦿		
Paint/Varnish/Filler	⦿		

Advantages: High removal rate, fine surface scratch pattern, especially suitable for hardwood, HPL panels and melamine and primer foil coatings - Reduced clogging and longer service life due to ACT recipe and antistatic properties



Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Wide belts with paper backing

Coated abrasives



Abrasive paper, ANTISTATIC

PS 524 E



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	E-paper

Applications:

Stainless steel	●
Paint/Varnish/Filler	●
Plastic	●
Wood	①



Advantages: Universal belt for hard and tough workpiece surfaces - Produces a brilliant finish on stainless steel surfaces - Fine sanding pattern in the wood and furniture industry - Long service life due to antistatic equipment - Very good price-performance ratio

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Abrasive paper, ANTISTATIC

PS 24 F ACT



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	F-paper

Applications:

Stainless steel	●
Paint/Varnish/Filler	●
Plastic	●
Wood	①



Advantages: For hard and tough surfaces - Produces a brilliant, high gloss finish on stainless steel surfaces due to the very hard and sharp-edged silicon carbide grit - Long service life on varnish surfaces in the wood and furniture industry due to ACT recipe and antistatic properties

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Wide belts with paper backing

Coated abrasives

Abrasive paper, ANTISTATIC

PS 27 DW



Properties

Bonding agent	Resin
Grain	SiC
Coating	Open
Backing	D-paper

Applications:

Paint/Varnish/Filler	●
Aluminium	●
Plastic	●

Advantages: Special product for high-quality varnish surfaces, especially UV finishes - Substantially reduced clogging and significantly longer service life due to additional stearate coating and antistatic properties



Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

All sizes and minimum purchasing quantities available on request

Abrasive paper, ANTISTATIC

PS 28 F



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Open
Backing	F-paper

Applications:

Wood	●
Leather	●

Advantages: Universal type for use on wood, especially softwood - For wide belts up to 1350 mm



Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
1120 x 1900	60	F1	10	321842
1120 x 1900	80	F1	10	321843
1120 x 1900	120	F1	10	321845
1350 x 2620	150	F1	10	320417

Wide belts with paper backing

Coated abrasives



Abrasive paper, ANTISTATIC

PS 29 F ACT



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Open
Backing	F-paper

Applications:

Wood	●
------	---



Advantages: High-quality universal type for general woodworking - Large product mix - Reduced clogging and longer service life due to ACT recipe and antistatic properties

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
930 x 1525	80	F1	10	307852
930 x 1525	120	F1	10	307854
1100 x 1900	80	F1	10	307857
1100 x 1900	120	F1	10	307859
1120 x 1900	60	F1	10	292903
1120 x 1900	80	F1	10	292904
1120 x 1900	100	F1	10	292935
1120 x 1900	120	F1	10	292936
1120 x 1900	150	F1	10	292937
1120 x 2150	80	F1	10	307863
1120 x 2150	120	F1	10	307865
1130 x 2200	80	F1	10	364039
1130 x 2200	120	F1	10	364040
1350 x 2620	60	F1	10	292938
1350 x 2620	80	F1	10	292939
1350 x 2620	120	F1	10	292941
1350 x 2620	150	F1	10	292942
1350 x 2620	180	F1	10	307867

Wide belts with paper backing

Coated abrasives

Abrasive paper, ANTISTATIC

PS 38 G ACT



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	G-paper

Applications:

Wood-based materials	●
Wood	●
Composite materials	●
Mineral based materials	●

Advantages: High removal rate and fine surface scratch pattern - Developed for fine sanding of wood based materials with wide belts and segmented belts - Outstanding grit adhesion, very long service life due to perfect antistatic properties and ACT recipe



Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

CEVOLUTION

Abrasive paper

PS 61 F CEVOLUTION



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close
Backing	F-paper

Applications:

Stainless steel	●
Steel	●
Wood	○

Advantages: Continuously aggressive abrasive behaviour due to micro-crystalline and self-sharpening ceramic grit - High performance abrasive belt for stainless steel finish grinding - The PS 61 F includes the new CEVOLUTION technology. CEVOLUTION stands for holistically optimized, ceramic abrasives. Klingspor products with CEVOLUTION technology contain, among others, an optimized grit mix, grit sizes and formulation in order to offer the maximum performance in every application.



Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Wide belts with paper backing

Coated abrasives



Abrasive paper, KULEX

PS 729 F



Properties

Bonding agent	Resin
Grain	Al. oxide agglom.
Coating	Close
Backing	F-paper

Applications:

Stainless steel	●
Steel	●

Advantages: Long life belt for dry grinding applications - Extremely high service life - Constant surface quality for pre-grinding until finishing - Especially developed grinding with intermediate contact pressure

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

All sizes and minimum purchasing quantities available on request

Wide belts with cloth backing

Coated abrasives

Abrasive cloth

CS 308 Y



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	Y-polyester

Applications:

Wood	●	Plastic	⦿
NF metals	●		
Stainless steel	●		
Steel	●		

Advantages: Universal product for metal and wood applications - High tear resistance - Moisture proof

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Abrasive cloth

CS 310 X



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	X-cotton

Applications:

Metals	●	Plastic	⦿
Steel	●		
Stainless steel	●		
Wood	⦿		

Advantages: Universal product with optimal price-performance ratio - Available in a wide grit range

Available grits:

16 20 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Wide belts with cloth backing

Coated abrasives



Abrasive cloth ANTISTATIC

CS 311 Y ACT



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Open
Backing	Y-polyester

Applications:

Wood	●
Metals	○

Advantages: Specially developed for calibration grinding of wood - Reduced clogging and longer service life due to ACT recipe and antistatic properties

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Abrasive cloth, waterproof

CS 320 Y



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	Y-polyester

Applications:

Mineral based materials	●
Plastic	●

Advantages: Very hard and sharp silicon carbide grain for hard and tough workpiece surfaces - High aggressiveness and abrasive performance - Especially suitable for wet grinding

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Wide belts with cloth backing

Coated abrasives

Abrasive cloth, waterproof

CS 321 X



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	X-cotton

Applications:

Mineral based materials	●
Plastic	●
Stainless steel	●

Advantages: Produces a brilliant, glossy finish on stainless steel surfaces due to the very hard and sharp-edged silicon carbide grit - Very high aggressiveness and abrasive performance - Especially suitable for wet grinding



Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Abrasive cloth, KULEX

CS 326 Y



Properties

Bonding agent	Resin
Grain	Al. oxide agglom.
Coating	Close
Backing	Y-polyester

Applications:

Stainless steel	●
Steel	●

Advantages: Long-life abrasive belt for a satin surface scratch pattern, under medium to high grinding pressure - Extremely long life, with consistent surface roughness and finish - Suitable for wet grinding



Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Wide belts with cloth backing

Coated abrasives



Abrasive cloth, KULEX

CS 329 Y



Properties

Bonding agent	Resin
Grain	Al. oxide agglom.
Coating	Close
Backing	Y-polyester

Applications:

Stainless steel	●
Steel	●

Advantages: Long-life abrasive belt for a satin surface scratch pattern, under low to medium grinding pressure - Especially suitable for dry grinding

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Abrasive cloth

CS 330 X



Properties

Bonding agent	Resin
Grain	SiC/Cork
Coating	Close
Backing	X-cotton

Applications:

Steel	●
Stainless steel	●

Advantages: Special product for soft and fine grinding, polishable due to very hard and sharp edged silicon carbide grit on cork granulate - Special satin finish grinding on steel and stainless steel surfaces - Suitable for dry and wet grinding

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Wide belts with cloth backing

Coated abrasives

Abrasive cloth ANTISTATIC

CS 336 Y



Properties

Bonding agent	Resin
Grain	SiC
Coating	Semi-open
Backing	Y-polyester

Applications:

Wood	●
Mineral based materials	●
Wood-based materials	●



Advantages: High removal rate, especially suitable for calibration of wood-based materials (one piece wide belts up to 1620 mm) - Optimal static reduction - No dust accumulation due to perfect antistatic properties

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Abrasive cloth, waterproof

CS 341 X



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	X-cotton

Applications:

Metals	●
Stainless steel	●
Steel	●
NF metals	●



Advantages: Universal product for wet and dry grinding of steel and stainless steel - Excellent wear properties in wet grinding

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Wide belts with cloth backing

Coated abrasives



Abrasive cloth, multibond

CS 409 Y



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close
Backing	Y-polyester

Applications:

Stainless steel	●
-----------------	---

Advantages: Aggressive abrasive behaviour due to self-sharpening zirconia alumina - Prevents heat tinting on stainless steel - Cool grinding due to additional multibond - Minimal clogging when used on aluminium and aluminium alloys

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Abrasive cloth, waterproof

CS 411 Y



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close
Backing	Y-polyester

Applications:

Steel	●
Stainless steel	●
Metals	●

Advantages: Aggressive abrasive behaviour - Universal product for use on steel and stainless steel

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Wide belts with cloth backing

Coated abrasives

Abrasive cloth, waterproof

CS 412 Y



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	Y-polyester

Applications:

Stainless steel	●	Wood	①
Metals	●		
Steel	●		
NF metals	●		

Advantages: Universal product for rough and intermediate grinding of steel and non-ferrous metals

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Abrasive cloth ANTISTATIC

CS 538 Z ACT



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	Z-polyester

Applications:

Wood-based materials	●
Wood	●
Composite materials	●
Mineral based materials	●

Advantages: Exceptionally tear-resistant type of polyester - The perfectly balanced ACT recipe allows for a long service life combined with an excellent removal rate

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Wide belts with cloth backing

Coated abrasives



Abrasive cloth, waterproof

CS 729 X



Properties

Bonding agent	Resin
Grain	Al. oxide agglom.
Coating	Close
Backing	X-cotton

Applications:

Stainless steel	●
Steel	●



Advantages: Long life abrasive belt for wet and dry sanding with exceptionally long service life - For a satin surface scratch pattern with uniform surface quality - Specially developed for coil and sheet grinding with medium tool pressure - Easy handling during abrasive belt changes thanks to tear-resistant and semi-flexible cotton backing

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Abrasive cloth

CS 911 X



NEW !

Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close
Backing	Cotton/polyester

Applications:

Stainless steel	●
Steel	●
Hardwood	●
NF metals	ⓘ



Advantages: Self-sharpening ceramic grit for coarse and intermediate grinding in the steel and stainless steel processing industry and for hardwood sanding

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Wide belts with cloth backing

Coated abrasives

Abrasive cloth, multibond

CS 913 X



NEW !



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close
Backing	Cotton/polyester

Applications:

Stainless steel	●
High alloy steel	●
NF metals	●

Advantages: Continuously aggressive grinding behaviour - Long service life due to self-sharpening ceramic grit - The additional multibond provides a "cool grinding" in the processing of stainless steel and thus tempering colours are avoided - No premature clogging on aluminium

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

CEVOLUTION

Abrasive cloth, multibond

CS 920 Y ACT CEVOLUTION



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close
Backing	Y-polyester

Applications:

Stainless steel	●
High alloy steel	●

Advantages: Special product with Advanced Coating-Technology (ACT) - Excellent grit adhesion - Highly tear-resistant polyester backing and self sharpening ceramic grain for rough, and intermediate grinding of stainless steel and high alloyed steel at high loads - Higher service life and cool grinding due to special coating with active multibond - The CS 920 Y includes the new CEVOLUTION technology. CEVOLUTION stands for holistically optimized, ceramic abrasives. Klingspor products with CEVOLUTION technology contain, among others, an optimized grit mix, grit sizes and formulation in order to offer the maximum performance in every application.

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Wide belts with cloth backing

Coated abrasives



CEVOLUTION

Abrasive cloth, waterproof

CS 922 Y ACT CEVOLUTION



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close
Backing	Y-polyester

Applications:

Stainless steel	●
Steel	●

Advantages: Continuously aggressive grinding behaviour - Long service life due to self-sharpening ceramic grit - Very high grain adhesion thanks to Advanced Coating Technology and highly tear-resistant polyester backing - The CS 922 Y includes the new CEVOLUTION technology. CEVOLUTION stands for holistically optimized, ceramic abrasives. Klingspor products with CEVOLUTION technology contain, among others, an optimized grit mix, grit sizes and formulation in order to offer the maximum performance in every application.

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

All sizes and minimum purchasing quantities available on request

Fibre discs

Applications Fibre Discs					
Application	Type	Grain	Backing	Coating	Page
Steel / NF metals	CS 561	Aluminium oxide	Fibre	●	87
	FS 764 ACT	Aluminium oxide	Fibre	●	89
Steel / Stainless steel	CS 565	Zirconia alumina	Fibre	●	90
	FS 964 ACT	Ceramic aluminium oxide	Fibre	●	92
Stainless steel	CS 570	Zirconia alumina	Fibre	●	91
	FS 966 ACT	Ceramic aluminium oxide	Fibre	●	93
Concrete, natural stone	SFD 300 C	SiC	Fibre	●	94

● = close ◐ = semi-open ○ = open

Minimum order quantities for made to order items

Disc diameter	Minimum order quantities
up to 235 mm	1,000 pieces



We reserve the right to over-deliver or under-deliver made to order items.

Abrasive fibre disc

CS 561



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close

Applications:

Steel	●	Stainless steel	○
NF metals	●	Wood	○
Metals	●		
Plastic	○		

Advantages: For universal use - Largest selection of diameters, grit sizes and hole patterns

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Hole in mm	Grit	Hole pattern	Max. RPM	Packing unit/pcs.	Cat. number
100 x 16	24	⊙ 10	15300 rpm	25	65713
100 x 16	36	⊙ 10	15300 rpm	25	65718
100 x 16	40	⊙ 10	15300 rpm	25	65720
100 x 16	50	⊙ 10	15300 rpm	25	65725
100 x 16	60	⊙ 10	15300 rpm	25	65730
100 x 16	80	⊙ 10	15300 rpm	25	65735
100 x 16	120	⊙ 10	15300 rpm	25	65743
115 x 22	16	⊙ 10	13300 rpm	25	66302
115 x 22	24	⊙ 10	13300 rpm	25	72298
115 x 22	36	⊙ 10	13300 rpm	25	66308
115 x 22	40	⊙ 10	13300 rpm	25	72192
115 x 22	50	⊙ 10	13300 rpm	25	66313
115 x 22	60	⊙ 10	13300 rpm	25	66318
115 x 22	80	⊙ 10	13300 rpm	25	25472
115 x 22	100	⊙ 10	13300 rpm	25	66322
115 x 22	120	⊙ 10	13300 rpm	25	66327
115 x 22	16	⊗ 30	13300 rpm	25	10977
115 x 22	24	⊗ 30	13300 rpm	25	10978
115 x 22	30	⊗ 30	13300 rpm	25	10979
115 x 22	36	⊗ 30	13300 rpm	25	10980
115 x 22	40	⊗ 30	13300 rpm	25	10981
115 x 22	50	⊗ 30	13300 rpm	25	10982
115 x 22	60	⊗ 30	13300 rpm	25	10983
115 x 22	80	⊗ 30	13300 rpm	25	10984
115 x 22	100	⊗ 30	13300 rpm	25	10985
115 x 22	120	⊗ 30	13300 rpm	25	10986
115 x 22	150	⊗ 30	13300 rpm	25	10987
115 x 22	180	⊗ 30	13300 rpm	25	10988
115 x 22	220	⊗ 30	13300 rpm	25	10989
115 x 22	240	⊗ 30	13300 rpm	25	10990
115 x 22	320	⊗ 30	13300 rpm	25	10992
115 x 22 X-LOCK	24	⊗ 50	13300 rpm	25	351150
115 x 22 X-LOCK	36	⊗ 50	13300 rpm	25	351147
115 x 22 X-LOCK	40	⊗ 50	13300 rpm	25	351149



Fibre discs

Coated abrasives

►► Continuation of CS 561, Abrasive fibre disc

Diameter x Hole in mm	Grit	Hole pattern	Max. RPM	Packing unit/pcs.	Cat. number
115 x 22 X-LOCK	60	⊙ 50	13300 rpm	25	351148
115 x 22 X-LOCK	80	⊙ 50	13300 rpm	25	351146
125 x 22	16	⊙ 10	12200 rpm	25	66354
125 x 22	24	⊙ 10	12200 rpm	25	66358
125 x 22	36	⊙ 10	12200 rpm	25	66364
125 x 22	40	⊙ 10	12200 rpm	25	66366
125 x 22	50	⊙ 10	12200 rpm	25	66371
125 x 22	60	⊙ 10	12200 rpm	25	66376
125 x 22	80	⊙ 10	12200 rpm	25	70439
125 x 22	100	⊙ 10	12200 rpm	25	66379
125 x 22	120	⊙ 10	12200 rpm	25	66383
125 x 22	16	⊗ 30	12200 rpm	25	11009
125 x 22	24	⊗ 30	12200 rpm	25	11010
125 x 22	30	⊗ 30	12200 rpm	25	11011
125 x 22	36	⊗ 30	12200 rpm	25	11012
125 x 22	40	⊗ 30	12200 rpm	25	11013
125 x 22	50	⊗ 30	12200 rpm	25	11014
125 x 22	60	⊗ 30	12200 rpm	25	11015
125 x 22	80	⊗ 30	12200 rpm	25	11016
125 x 22	100	⊗ 30	12200 rpm	25	11017
125 x 22	120	⊗ 30	12200 rpm	25	11018
125 x 22	150	⊗ 30	12200 rpm	25	11019
125 x 22	180	⊗ 30	12200 rpm	25	11020
125 x 22	220	⊗ 30	12200 rpm	25	11021
125 x 22	240	⊗ 30	12200 rpm	25	11022
125 x 22	320	⊗ 30	12200 rpm	25	11024
125 x 22 X-LOCK	24	⊙ 50	12200 rpm	25	351145
125 x 22 X-LOCK	36	⊙ 50	12200 rpm	25	351144
125 x 22 X-LOCK	40	⊙ 50	12200 rpm	25	351143
125 x 22 X-LOCK	60	⊙ 50	12200 rpm	25	351139
125 x 22 X-LOCK	80	⊙ 50	12200 rpm	25	351142
150 x 22	24	⊗ 30	10200 rpm	25	11042
150 x 22	36	⊗ 30	10200 rpm	25	11044
150 x 22	40	⊗ 30	10200 rpm	25	11045
150 x 22	60	⊗ 30	10200 rpm	25	11047
150 x 22	80	⊗ 30	10200 rpm	25	11048
150 x 22	120	⊗ 30	10200 rpm	25	11050
180 x 22	16	⊙ 10	8500 rpm	25	66443
180 x 22	24	⊙ 10	8500 rpm	25	66451
180 x 22	36	⊙ 10	8500 rpm	25	66459
180 x 22	40	⊙ 10	8500 rpm	25	70447
180 x 22	50	⊙ 10	8500 rpm	25	70448
180 x 22	60	⊙ 10	8500 rpm	25	70449
180 x 22	80	⊙ 10	8500 rpm	25	66465
180 x 22	100	⊙ 10	8500 rpm	25	66469
180 x 22	120	⊙ 10	8500 rpm	25	66472
180 x 22	16	⊗ 30	8500 rpm	25	11057
180 x 22	24	⊗ 30	8500 rpm	25	11058
180 x 22	36	⊗ 30	8500 rpm	25	11060
180 x 22	40	⊗ 30	8500 rpm	25	11061
180 x 22	50	⊗ 30	8500 rpm	25	11062



►► Continuation of CS 561, Abrasive fibre disc

Diameter x Hole in mm	Grit	Hole pattern	Max. RPM	Packing unit/pcs.	Cat. number
180 x 22	60	⊗ 30	8500 rpm	25	11063
180 x 22	80	⊗ 30	8500 rpm	25	11064
180 x 22	100	⊗ 30	8500 rpm	25	11065
180 x 22	120	⊗ 30	8500 rpm	25	11066
180 x 22	180	⊗ 30	8500 rpm	25	11068
180 x 22	240	⊗ 30	8500 rpm	25	11070
180 x 22	320	⊗ 30	8500 rpm	25	11072
235 x 22	24	⊙ 10	6500 rpm	25	66497
235 x 22	36	⊙ 10	6500 rpm	25	66502
235 x 22	40	⊙ 10	6500 rpm	25	66504
235 x 22	60	⊙ 10	6500 rpm	25	66511
235 x 22	80	⊙ 10	6500 rpm	25	66514

Dispenser see page 96 / Backing pads see page 95.

Abrasive fibre disc

FS 764 ACT



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close

Applications:

Steel	●	NF metals	●
Stainless steel	●	Wood	●
Metals	●		
Plastic	●		

Advantages: For universal use - Increased removal rate and outstanding grit adhesion due to special ACT recipe - Long service life - Also suitable for stainless steel

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Hole in mm	Grit	Hole pattern	Max. RPM	Packing unit/pcs.	Cat. number
115 x 22	24	⊗ 30	13300 rpm	25	316469
115 x 22	36	⊗ 30	13300 rpm	25	316470
115 x 22	40	⊗ 30	13300 rpm	25	316471
115 x 22	60	⊗ 30	13300 rpm	25	316473
115 x 22	80	⊗ 30	13300 rpm	25	316474
115 x 22	120	⊗ 30	13300 rpm	25	316475
125 x 22	24	⊗ 30	12200 rpm	25	316476
125 x 22	36	⊗ 30	12200 rpm	25	316477
125 x 22	40	⊗ 30	12200 rpm	25	316478
125 x 22	60	⊗ 30	12200 rpm	25	316480
125 x 22	80	⊗ 30	12200 rpm	25	316481
125 x 22	120	⊗ 30	12200 rpm	25	316482
180 x 22	24	⊗ 30	8500 rpm	25	316483
180 x 22	36	⊗ 30	8500 rpm	25	316484
180 x 22	40	⊗ 30	8500 rpm	25	316485
180 x 22	60	⊗ 30	8500 rpm	25	316487
180 x 22	80	⊗ 30	8500 rpm	25	316488
180 x 22	120	⊗ 30	8500 rpm	25	316489

Dispenser see page 96 / Backing pads see page 95.

Fibre discs

Coated abrasives

Abrasive fibre disc

CS 565



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close

Applications:

Stainless steel	●
Steel	●
Metals	●

Advantages: Self-sharpening effect - High aggressiveness on steel and stainless steel - Ideal for rough grinding work - Excellent price-performance ratio

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Hole in mm	Grit	Hole pattern	Max. RPM	Packing unit/pcs.	Cat. number
100 x 16	36	⊙ 10	15300 rpm	25	23680
100 x 16	60	⊙ 10	15300 rpm	25	84604
100 x 16	80	⊙ 10	15300 rpm	25	188678
115 x 22	24	⊙ 10	13300 rpm	25	93409
115 x 22	36	⊙ 10	13300 rpm	25	65698
115 x 22	60	⊙ 10	13300 rpm	25	65700
115 x 22	80	⊙ 10	13300 rpm	25	65701
115 x 22	24	⊕ 30	13300 rpm	25	95335
115 x 22	36	⊕ 30	13300 rpm	25	6686
115 x 22	40	⊕ 30	13300 rpm	25	242801
115 x 22	50	⊕ 30	13300 rpm	25	92066
115 x 22	60	⊕ 30	13300 rpm	25	6687
115 x 22	80	⊕ 30	13300 rpm	25	6688
115 x 22	100	⊕ 30	13300 rpm	25	204609
115 x 22 X-LOCK	24	⊕ 50	13300 rpm	25	351141
115 x 22 X-LOCK	36	⊕ 50	13300 rpm	25	351140
115 x 22 X-LOCK	40	⊕ 50	13300 rpm	25	351154
115 x 22 X-LOCK	60	⊕ 50	13300 rpm	25	351160
115 x 22 X-LOCK	80	⊕ 50	13300 rpm	25	351159
125 x 22	36	⊙ 10	12200 rpm	25	65681
125 x 22	60	⊙ 10	12200 rpm	25	65707
125 x 22	80	⊙ 10	12200 rpm	25	23001
125 x 22	24	⊕ 30	12200 rpm	25	97643
125 x 22	36	⊕ 30	12200 rpm	25	6620
125 x 22	40	⊕ 30	12200 rpm	25	242803
125 x 22	50	⊕ 30	12200 rpm	25	93054
125 x 22	60	⊕ 30	12200 rpm	25	6721
125 x 22	80	⊕ 30	12200 rpm	25	23005
125 x 22	100	⊕ 30	12200 rpm	25	204611
125 x 22 X-LOCK	24	⊕ 50	12200 rpm	25	351158
125 x 22 X-LOCK	36	⊕ 50	12200 rpm	25	351161
125 x 22 X-LOCK	40	⊕ 50	12200 rpm	25	351157
125 x 22 X-LOCK	60	⊕ 50	12200 rpm	25	351156
125 x 22 X-LOCK	80	⊕ 50	12200 rpm	25	351155



►► Continuation of CS 565, Abrasive fibre disc

Diameter x Hole in mm	Grit	Hole pattern	Max. RPM	Packing unit/pcs.	Cat. number
180 x 22	36	⊙ 10	8500 rpm	25	65702
180 x 22	60	⊙ 10	8500 rpm	25	65705
180 x 22	80	⊙ 10	8500 rpm	25	65706
180 x 22	24	⊗ 30	8500 rpm	25	95993
180 x 22	36	⊗ 30	8500 rpm	25	65703
180 x 22	40	⊗ 30	8500 rpm	25	242807
180 x 22	50	⊗ 30	8500 rpm	25	93045
180 x 22	60	⊗ 30	8500 rpm	25	6690
180 x 22	80	⊗ 30	8500 rpm	25	6691

Dispenser see page 96 / Backing pads see page 95.

Abrasive fibre disc, multibond

CS 570



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close

Applications:

Stainless steel	●
Aluminium	●
NF metals	○



Advantages: Self-sharpening effect - High aggressiveness, especially suitable for stainless steel - Increase in performance due to low temperatures - Multibond prevents heat tinting - Especially suitable for use on aluminium

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

Diameter x Hole in mm	Grit	Hole pattern	Max. RPM	Packing unit/pcs.	Cat. number
100 x 16	36	⊙ 10	15300 rpm	25	204823
100 x 16	60	⊙ 10	15300 rpm	25	204825
100 x 16	80	⊙ 10	15300 rpm	25	204826
100 x 16	120	⊙ 10	15300 rpm	25	204828
115 x 22	36	⊙ 10	13300 rpm	25	204797
115 x 22	60	⊙ 10	13300 rpm	25	204799
115 x 22	80	⊙ 10	13300 rpm	25	204800
115 x 22	120	⊙ 10	13300 rpm	25	204802
115 x 22	24	⊗ 30	13300 rpm	25	204085
115 x 22	36	⊗ 30	13300 rpm	25	204086
115 x 22	40	⊗ 30	13300 rpm	25	250258
115 x 22	50	⊗ 30	13300 rpm	25	204087
115 x 22	60	⊗ 30	13300 rpm	25	204088
115 x 22	80	⊗ 30	13300 rpm	25	204089
115 x 22	100	⊗ 30	13300 rpm	25	204090
115 x 22	120	⊗ 30	13300 rpm	25	204091
125 x 22	36	⊙ 10	12200 rpm	25	204806
125 x 22	60	⊙ 10	12200 rpm	25	204811
125 x 22	80	⊙ 10	12200 rpm	25	204812
125 x 22	120	⊙ 10	12200 rpm	25	204814
125 x 22	24	⊗ 30	12200 rpm	25	204092



Fibre discs

Coated abrasives

►► Continuation of CS 570 Abrasive fibre disc, multibond

Diameter x Hole in mm	Grit	Hole pattern	Max. RPM	Packing unit/pcs.	Cat. number
125 x 22	36	⊕ 30	12200 rpm	25	204093
125 x 22	40	⊕ 30	12200 rpm	25	250259
125 x 22	50	⊕ 30	12200 rpm	25	204094
125 x 22	60	⊕ 30	12200 rpm	25	204095
125 x 22	80	⊕ 30	12200 rpm	25	204096
125 x 22	100	⊕ 30	12200 rpm	25	204097
125 x 22	120	⊕ 30	12200 rpm	25	204098
180 x 22	24	⊕ 30	8500 rpm	25	204099
180 x 22	36	⊕ 30	8500 rpm	25	204100
180 x 22	60	⊕ 30	8500 rpm	25	204102
180 x 22	80	⊕ 30	8500 rpm	25	204103
180 x 22	120	⊕ 30	8500 rpm	25	204105

Dispenser see page 96 / Backing pads see page 95.

Abrasive fibre disc

FS 964 ACT



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close

Applications:

Steel	●
Stainless steel	●

Advantages: Premium product with excellent performance for working on steel - Micro-crystalline self-sharpening effect - High aggressiveness thanks to self-sharpening, aggressive ceramic grains throughout the service life - Outstanding grit adhesion - Advanced coating technology (ACT) for extraordinary grain adhesion and extended service life

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Hole in mm	Grit	Hole pattern	Max. RPM	Packing unit/pcs.	Cat. number
115 x 22	24	⊕ 30	13300 rpm	25	330478
115 x 22	36	⊕ 30	13300 rpm	25	330498
115 x 22	40	⊕ 30	13300 rpm	25	330482
115 x 22	50	⊕ 30	13300 rpm	25	330480
115 x 22	60	⊕ 30	13300 rpm	25	330479
115 x 22	80	⊕ 30	13300 rpm	25	330481
115 x 22	120	⊕ 30	13300 rpm	25	330483
125 x 22	24	⊕ 30	12200 rpm	25	330484
125 x 22	36	⊕ 30	12200 rpm	25	330485
125 x 22	40	⊕ 30	12200 rpm	25	330486
125 x 22	50	⊕ 30	12200 rpm	25	330488
125 x 22	60	⊕ 30	12200 rpm	25	330487
125 x 22	80	⊕ 30	12200 rpm	25	330490
125 x 22	120	⊕ 30	12200 rpm	25	330491
180 x 22	24	⊕ 30	8500 rpm	25	330489
180 x 22	36	⊕ 30	8500 rpm	25	330492



►► Continuation of FS 964 ACT, Abrasive fibre disc

Diameter x Hole in mm	Grit	Hole pattern	Max. RPM	Packing unit/pcs.	Cat. number
180 x 22	40	⊗ 30	8500 rpm	25	330493
180 x 22	50	⊗ 30	8500 rpm	25	330494
180 x 22	60	⊗ 30	8500 rpm	25	330495
180 x 22	80	⊗ 30	8500 rpm	25	330496

Dispenser see page 96 / Backing pads see page 95.

Abrasive fibre disc, multibond

FS 966 ACT



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close

Applications:

Stainless steel	●
-----------------	---



Advantages: Micro-crystalline self-sharpening effect - High aggressiveness throughout the service life - Outstanding grit adhesion - Long service life, especially suitable for heavy duty applications - Increase in performance due to low temperatures - Multibond prevents heat tinting

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Hole in mm	Grit	Hole pattern	Max. RPM	Packing unit/pcs.	Cat. number
115 x 22	36	⊗ 30	13300 rpm	25	316490
115 x 22	40	⊗ 30	13300 rpm	25	316491
115 x 22	50	⊗ 30	13300 rpm	25	318504
115 x 22	60	⊗ 30	13300 rpm	25	316492
115 x 22	80	⊗ 30	13300 rpm	25	316493
115 x 22	120	⊗ 30	13300 rpm	25	324237
115 x 22 X-LOCK	40	⊗ 50	13300 rpm	25	351166
115 x 22 X-LOCK	60	⊗ 50	13300 rpm	25	351167
115 x 22 X-LOCK	80	⊗ 50	13300 rpm	25	351165
125 x 22	24	⊗ 30	12200 rpm	25	318305
125 x 22	36	⊗ 30	12200 rpm	25	316494
125 x 22	40	⊗ 30	12200 rpm	25	316495
125 x 22	60	⊗ 30	12200 rpm	25	316496
125 x 22	80	⊗ 30	12200 rpm	25	316497
125 x 22	120	⊗ 30	12200 rpm	25	324239
125 x 22 X-LOCK	40	⊗ 50	12200 rpm	25	351164
125 x 22 X-LOCK	60	⊗ 50	12200 rpm	25	351163
125 x 22 X-LOCK	80	⊗ 50	12200 rpm	25	351162
180 x 22	24	⊗ 30	8500 rpm	25	318352
180 x 22	36	⊗ 30	8500 rpm	25	316498
180 x 22	40	⊗ 30	8500 rpm	25	316499
180 x 22	60	⊗ 30	8500 rpm	25	316501
180 x 22	80	⊗ 30	8500 rpm	25	316502
180 x 22	120	⊗ 30	8500 rpm	25	324238

Dispenser see page 96 / Backing pads see page 95.

Fibre discs

Coated abrasives

Semi-flexible abrasive disc

SFD 300 C



NEW !

Properties

Bonding agent	Glue
Grain	SiC
Coating	Close
Backing	Fibre

Applications:

Marble	●	Plastic	●
Granite	●	Adhesive	●
Concrete	●	Steel	○
Terrazzo	●	Stainless steel	○

Advantages: Highly aggressive and sharp silicon carbide grain - Long service life - Flexible application on almost all materials - Very good price/performance ratio - Use only with backing pad (ST 358 A)

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Hole in mm	Grit	Hole pattern	Max. RPM	Packing unit/pcs.	Cat. number
115 x 22,23	16	⊕ 30	13300 rpm	10	670497
115 x 22,23	24	⊕ 30	13300 rpm	10	670499
115 x 22,23	36	⊕ 30	13300 rpm	10	670501
115 x 22,23	60	⊕ 30	13300 rpm	10	670502
115 x 22,23	80	⊕ 30	13300 rpm	10	670503
115 x 22,23	120	⊕ 30	13300 rpm	10	670506
125 x 22,23	16	⊕ 30	12200 rpm	10	670507
125 x 22,23	24	⊕ 30	12200 rpm	10	670508
125 x 22,23	36	⊕ 30	12200 rpm	10	670509
125 x 22,23	60	⊕ 30	12200 rpm	10	670511
125 x 22,23	80	⊕ 30	12200 rpm	10	670512
125 x 22,23	120	⊕ 30	12200 rpm	10	670515
180 x 22,23	16	⊕ 30	8600 rpm	10	670516
180 x 22,23	24	⊕ 30	8600 rpm	10	670519
180 x 22,23	36	⊕ 30	8600 rpm	10	670521
180 x 22,23	60	⊕ 30	8600 rpm	10	670523
180 x 22,23	80	⊕ 30	8600 rpm	10	670524
180 x 22,23	120	⊕ 30	8600 rpm	10	670528

Dispenser see page 96 / Backing pads see page 95.

Backing pad, plain/flexible

ST 358



XLOCK !



Advantages: Medium-hard backing pad allows good adaptation to the workpiece - For universal use, especially for surface and finish grinding (grit 50 and finer) - High temperature resistance

Diameter in mm	Thread/Shaft	Suitable for	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
100	thread M10	Diameter 100 x 16	80 m/s	15300 rpm	1	305190
100	thread M14	Diameter 100 x 22	80 m/s	15300 rpm	1	2774
115 X-LOCK	X-LOCK	Ø 115 X-LOCK	80 m/s	13300 rpm	1	352049
115	thread M10	Diameter 115 x 22	80 m/s	13300 rpm	1	14859
115	thread M14	Diameter 115 x 22	80 m/s	13300 rpm	1	14838
125 X-LOCK	X-LOCK	Ø 125 X-LOCK	80 m/s	12200 rpm	1	352048
125	thread M14	Diameter 125 x 22	80 m/s	12200 rpm	1	14835
150	thread M14	Diameter 150 x 22	80 m/s	10200 rpm	1	14836
180	thread M14	Diameter 180 x 22	80 m/s	8500 rpm	1	14840
235	thread M14	Diameter 235 x 22	80 m/s	6600 rpm	1	14841

Backing pad, ribbed/hard

ST 358 A



XLOCK !



Advantages: For rough grinding - Cool grinding - Increased aggressiveness due to hard, ribbed abrasive surface - High temperature resistance and stability

Diameter in mm	Thread/Shaft	Suitable for	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 X-LOCK	X-LOCK	Ø 115 X-LOCK	80 m/s	13300 rpm	1	352047
115	thread M14	Diameter 115 x 22	80 m/s	13300 rpm	1	126346
125 X-LOCK	X-LOCK	Ø 125 X-LOCK	80 m/s	12200 rpm	1	352046
125	thread M14	Diameter 125 x 22	80 m/s	12200 rpm	1	126347
180	thread M14	Diameter 180 x 22	80 m/s	8500 rpm	1	126348

Dispenser for fibre discs

Dispenser for fibre discs

FS 555



Advantages: Easy stocking and removal of up to 100 fiber discs with diameter of 115 to 180 mm - Orderly and accessible storage at the workplace
Fibre discs not included

Width x Length x Height in mm	Packing unit/pcs.	Cat. number
170 x 140 x 196	1	316463



A large rectangular area with a light gray dot grid pattern, intended for taking notes.

Strips / Sheets / Discs

Application	Type	Grain	Backing	Coating	Page
Steel / stainless steel	PS 21 FK	Zirconia alumina	F-paper	●	121
	PS 61 FK	Ceramic aluminium oxide	F-paper	●	132
Steel / metals	KL 361 JF	Aluminium oxide	JF-cotton	●	113,116
	KL 371 X	Aluminium oxide	X-cotton	●	114
	KL 385 JF	Aluminium oxide	JF-cotton	●	115
	CS 411 XK	Zirconia alumina	X-cotton	●	143
	CS 920 YK	Ceramic aluminium oxide	Y-polyester	●	143
Wood	PS 22 F ACT	Aluminium oxide	F-paper	●	105
	PS 22 K	Aluminium oxide	E-paper	○	107,123
	PS 30 D	Aluminium oxide	D-paper	○	102,105
	PS 19 EK	SiC	E-paper	●	107,121
	PL 31 B	Aluminium oxide	B-paper	○	102,106
	SW 501 TR	Aluminium oxide	Sponge	●	118
Paint / Varnish / Filler	PS 33 B	Aluminium oxide	B-paper	○	104
	PS 33 BK	Aluminium oxide	B-paper	○	109,128
	PS 33 C	Aluminium oxide	C-paper	○	103
	PS 33 CK	Aluminium oxide	C-paper	○	108,127
	PS 73 BW	Aluminium oxide	B-paper	○	104
	PS 73 BWK	Aluminium oxide	B-paper	○	135
	PS 73 CWK	Aluminium oxide	C-paper	○	134
	PS 77 CK T-ACT	Aluminium oxide	C-paper	○	111,137
	PS 19 EK	SiC	E-paper	●	107,121
	FP 73 WK	Aluminium oxide	Film	○	110,133
	FP 77 K T-ACT	Aluminium oxide	Film	○	110,136
	PS 11 A	SiC	A-paper	●	101
	PS 11 C	SiC	C-paper	●	100,120
	PS 8 A	SiC	A-paper	●	99
	PS 8 C	SiC	C-paper	●	99
	FD 500	Aluminium oxide / SiC	Foam core		141
	SK 500	Aluminium oxide	Sponge	●	117
	SK 700 A	Aluminium oxide	Sponge	●	117
	SW 501	Aluminium oxide	Sponge	●	118
	SW 501 TR	Aluminium oxide	Sponge	●	118
	SW 502	SiC	Sponge	●	119
	SW 510	Aluminium oxide	Sponge	●	119
Composites, gel coats, paints and coatings, plaster and plasterboard, wood fillers and varnish	AN 400	Aluminium oxide	Abrasive screen	●	111,138

● = close ○ = semi-open ○ = open

Minimum order quantities for made to order items

Sheets / Strips

Product	Dimensions	Minimum order quantities
Sheets	230 × 280 mm	250 pieces
	70 × 450 mm	500 pieces
Strips	115 × 140 mm	1,000 pieces
	93 × 230 mm	500 pieces
	115 × 280 mm	500 pieces
Sheets exceeding 230 x 280 mm	Minimum quantities on request	
Large sheets	1400 × 1540 mm	10 pieces
Self-fastening products	70 × 125 mm	1,000 pieces
	80 × 133 mm	1,000 pieces
	93 × 230 mm	500 pieces
	100 × 115 mm	1,000 pieces
	115 × 280 mm	500 pieces

Other sizes available on request.

Discs

Type	Ø [mm]	Minimum order quantities
AN 400	up to 50 mm	5,000 pieces
CS 310 X	up to 90 mm	2,500 pieces
CS 321 X	up to 125 mm	1,000 pieces
CS 411 XK	up to 200 mm	500 pieces
FP 73 WK	up to 400 mm	200 pieces
PS 11 C	up to 600 mm	100 pieces
PS 19 EK	over 600 mm	25 pieces
PS 21 FK		
PS 22 F ACT		
PS 22 K		
PS 33 BK/CK		
PS 61 FK		
PS 73 BWK/CWK		
PS 77 CK		
FP 77 K		



We reserve the right to over-deliver or under-deliver made to order items.

Sheets with paper backing

Coated abrasives



Abrasive paper, waterproof

PS 8 C



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	C-paper

Applications:

Paint/Varnish/Filler	●
Plastic	●
Glass/Stone	ⓘ
Metals	ⓘ

Advantages: Ideal for hard and tough surfaces - Very flexible latex paper allows excellent adaptation - Can be used for wet and dry grinding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
230 x 280	60	50	269424
230 x 280	80	50	269429
230 x 280	100	50	269435
230 x 280	120	50	269444
230 x 280	150	50	269448

Abrasive paper, waterproof

PS 8 A



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	A-paper

Applications:

Paint/Varnish/Filler	●
Plastic	●
Glass/Stone	ⓘ
Metals	ⓘ

Advantages: Ideal for hard and tough surfaces - Very flexible latex paper allows excellent adaptation - Can be used for wet and dry grinding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
230 x 280	180	50	269269
230 x 280	220	50	269275
230 x 280	240	50	269279
230 x 280	280	50	269285
230 x 280	320	50	269289
230 x 280	360	50	269294



Sheets with paper backing

Coated abrasives

► Continuation of PS 8 A, Abrasive paper, waterproof

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
230 x 280	400	50	269299
230 x 280	600	50	269314
230 x 280	800	50	269323
230 x 280	1000	50	269328

Abrasive paper, waterproof

PS 11 C



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	C-paper

Applications:

Paint/Varnish/Filler	●
Plastic	●
Glass/Stone	◐
Metals	◐

Advantages: Special product for auto repair and painting - For hard and tough surfaces - Good adaptation and high stability - Wet and dry sanding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
230 x 280	60	50	2022
230 x 280	80	50	2023
230 x 280	100	50	2117
230 x 280	120	50	2116
230 x 280	150	50	2011
230 x 280	180	50	2012
230 x 280	220	50	2013
230 x 280	240	50	2014
230 x 280	280	50	2015
230 x 280	320	50	2016
230 x 280	360	50	2017
230 x 280	400	50	2018

Sheets with paper backing

Coated abrasives



Abrasive paper, waterproof

PS 11 A



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	A-paper

Applications:

Paint/Varnish/Filler	●
Plastic	●
Glass/Stone	○
Metals	○

Advantages: Special product for auto repair and painting - For hard and tough surfaces - Good adaptation and high stability - Wet and dry sanding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
230 x 280	220	50	2002
230 x 280	240	50	2003
230 x 280	280	50	2004
230 x 280	320	50	2005
230 x 280	360	50	2006
230 x 280	400	50	2007
230 x 280	500	50	2008
230 x 280	600	50	2009
230 x 280	800	50	2010
230 x 280	1000	50	11892
230 x 280	1200	50	6616
230 x 280	1500	50	186794
230 x 280	2000	50	186795

Sheets with paper backing

Coated abrasives

Abrasive paper

PS 30 D



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	D-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Metals	○

Advantages: Product with good price-performance ratio - For diverse applications

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
230 x 280	40	50	194660
230 x 280	60	50	194662
230 x 280	80	50	194663
230 x 280	100	50	194664
230 x 280	120	50	194665
230 x 280	150	50	194666
230 x 280	180	50	194667
230 x 280	240	50	194668
230 x 280	320	50	194669

Finishing paper

PL 31 B



Properties

Bonding agent	Glue
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Metals	○

Advantages: Product with optimal price-performance ratio - Optimized wear properties for hand grinding - Very fine surface scratch pattern

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
230 x 280	40	50	2059
230 x 280	50	50	2060
230 x 280	60	50	2061
230 x 280	80	50	2062



Sheets with paper backing

Coated abrasives



►► Continuation of PL 31 B, Finishing paper

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
230 x 280	100	50	2048
230 x 280	120	50	2049
230 x 280	150	50	2050
230 x 280	180	50	2051
230 x 280	220	50	2052
230 x 280	240	50	2053
230 x 280	280	50	2054
230 x 280	320	50	2055
230 x 280	400	50	2057

Abrasive paper

PS 33 C



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	C-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	○

Advantages: High removal rate - For diverse applications

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
230 x 280	40	50	147849
230 x 280	60	50	147850
230 x 280	80	50	147851
230 x 280	100	50	149719
230 x 280	120	50	147852

Sheets with paper backing

Coated abrasives

Abrasive paper

PS 33 B



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	●

Advantages: High removal rate - For diverse applications

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
230 x 280	150	50	149528
230 x 280	180	50	147853
230 x 280	220	50	149529
230 x 280	240	50	147854
230 x 280	280	50	149793
230 x 280	320	50	149530
230 x 280	400	50	148971
230 x 280	500	50	170667
230 x 280	600	50	170668

Abrasive paper, actively coated

PS 73 BW



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper

Applications:

Paint/Varnish/Filler	●
Plastic	●

Advantages: High quality product for use on varnish, paint and filler - High removal rate - Substantially reduced clogging and significantly longer service life due to additional special coating

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

All sizes and minimum purchasing quantities available on request

Strips with paper backing

Coated abrasives



Abrasive paper, ANTISTATIC

PS 22 F ACT



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	F-paper

Applications:

Wood	●	Steel	○
Metals	○	NF metals	○
Paint/Varnish/Filler	○		
Plastic	○		

Advantages: Premium product for hardwood - Good edge stability - Reduced clogging due to ACT recipe and antistatic properties

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
115 x 280	40	□ GL 0	100	6529
115 x 280	60	□ GL 0	100	6531
115 x 280	80	□ GL 0	100	6532
115 x 280	100	□ GL 0	100	6533

Abrasive paper

PS 30 D



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	D-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Metals	○

Advantages: Product with good price-performance ratio - For diverse applications

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
115 x 280	60	□ GL 0	100	194673
115 x 280	80	□ GL 0	100	194674
115 x 280	120	□ GL 0	100	194676
115 x 280	240	□ GL 0	100	194680

Strips with paper backing

Coated abrasives

Finishing paper

PL 31 B



Properties

Bonding agent	Glue
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Metals	●

Advantages: Product with optimal price-performance ratio - Optimized wear properties for hand-held machine grinding - Very fine surface scratch pattern

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
93 x 230	40	□ GL 0	100	2416
93 x 230	60	□ GL 0	100	2418
93 x 230	80	□ GL 0	100	2419
93 x 230	100	□ GL 0	100	2390
93 x 230	120	□ GL 0	100	2391
93 x 230	180	□ GL 0	100	2393
93 x 230	240	□ GL 0	100	2395
93 x 230	60	▤ GL 9	100	2667
93 x 230	80	▤ GL 9	100	2668
93 x 230	120	▤ GL 9	100	2670
115 x 280	40	□ GL 0	100	2412
115 x 280	60	□ GL 0	100	2414
115 x 280	80	□ GL 0	100	2415
115 x 280	100	□ GL 0	100	2379
115 x 280	120	□ GL 0	100	2380
115 x 280	150	□ GL 0	100	2381
115 x 280	180	□ GL 0	100	2382
115 x 280	220	□ GL 0	100	2383
115 x 280	240	□ GL 0	100	2384
115 x 280	60	▤ GL 1	100	5324
115 x 280	80	▤ GL 1	100	5323
115 x 280	120	▤ GL 1	100	5321

Strips with paper backing, self-fastening

Coated abrasives



Abrasive paper, self-fastening

PS 19 EK



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	E-paper

Applications:

Wood	●
Paint/Varnish/Filler	●
Plastic	●
Glass/Stone	●

Advantages: Hard and sharp silicon carbide grain for hard and tough materials - Resistant high-performance product with a stable E-paper backing for rough, intermediate and finish sanding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

All sizes and minimum purchasing quantities available on request

Abrasive paper, self-fastening

PS 22 K



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	E-paper

Applications:

Wood	●	Steel	●
Metals	●		
Paint/Varnish/Filler	●		
Plastic	●		

Advantages: High removal rate - Uniform scratch pattern

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
70 x 125	60	GL 0	100	147593
70 x 125	80	GL 0	100	140608
70 x 125	100	GL 0	100	131668
70 x 125	120	GL 0	100	129801
70 x 125	150	GL 0	100	135581
70 x 125	180	GL 0	100	129802
80 x 133	40	GL 18	100	149852
80 x 133	60	GL 18	100	149853
80 x 133	80	GL 18	100	149854
80 x 133	100	GL 18	100	149855
80 x 133	120	GL 18	100	149857
80 x 133	150	GL 18	100	232741
80 x 133	180	GL 18	100	232742



Strips with paper backing, self-fastening

Coated abrasives

►► Continuation of PS 22 K, Abrasive paper, self-fastening

Width x Length in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
80 x 133	220	 GL 18	100	206371
100 x 115	80	 GL 0	100	103378
100 x 115	100	 GL 0	100	103379
100 x 115	120	 GL 0	100	103380
100 x 115	150	 GL 0	100	103381
115 x 115	80	 GL 0	100	82076
115 x 115	120	 GL 0	100	81637
115 x 115	150	 GL 0	100	94721
115 x 230	40	 GL 15	100	122331
115 x 230	60	 GL 15	100	116647
115 x 230	80	 GL 15	100	116648
115 x 230	100	 GL 15	100	116649
115 x 230	120	 GL 15	100	114942
115 x 230	150	 GL 15	100	111500

Abrasive paper, self-fastening

PS 33 CK



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	C-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	●

Advantages: Improved abrasive and stock removal performance thanks to special heat-tempered aluminium oxide abrasive grain - Reduced clogging thanks to sanding active fillers in the size coat and the semi-open coating - Outstanding flexibility paired with good stability and tear resistance thanks to latex impregnated paper backing

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
70 x 125	80	 GL 0	100	155072
70 x 125	100	 GL 0	100	151786
70 x 125	120	 GL 0	100	151785
80 x 133	40	 GL 18	100	146974
80 x 133	60	 GL 18	100	146975
80 x 133	80	 GL 18	100	146976
80 x 133	100	 GL 18	100	146977
80 x 133	120	 GL 18	100	147169
93 x 178	40	 GL 17	100	146970
93 x 178	60	 GL 17	100	146971
93 x 178	80	 GL 17	100	146972
93 x 178	100	 GL 17	100	146973
93 x 178	120	 GL 17	100	148046
100 x 115	80	 GL 0	100	147101
100 x 115	100	 GL 0	100	147102
100 x 115	120	 GL 0	100	147103



Strips with paper backing, self-fastening

Coated abrasives



►► Continuation of PS 33 CK, Abrasive paper, self-fastening

Width x Length in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
115 x 230	40	GL 15	100	146966
115 x 230	60	GL 15	100	146967
115 x 230	80	GL 15	100	146968
115 x 230	100	GL 15	100	146969
115 x 230	120	GL 15	100	147182

Abrasive paper, self-fastening

PS 33 BK



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	⓪

Advantages: Improved abrasive and stock removal performance thanks to special heat-tempered aluminium oxide abrasive grain - Reduced clogging thanks to sanding active fillers in the size coat and the semi-open coating - Outstanding flexibility paired with good stability and tear resistance thanks to latex impregnated paper backing

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
70 x 125	150	GL 0	100	151784
70 x 125	180	GL 0	100	148228
70 x 125	220	GL 0	100	155500
70 x 125	240	GL 0	100	152381
70 x 125	280	GL 0	100	197133
80 x 133	150	GL 18	100	149107
80 x 133	180	GL 18	100	147479
80 x 133	220	GL 18	100	149819
80 x 133	240	GL 18	100	148050
80 x 133	320	GL 18	100	149897
80 x 133	400	GL 18	100	149899
93 x 178	150	GL 17	100	149138
93 x 178	180	GL 17	100	148047
93 x 178	240	GL 17	100	148048
100 x 115	150	GL 0	100	148658
100 x 115	180	GL 0	100	147104
100 x 115	240	GL 0	100	147105
115 x 230	150	GL 15	100	149820
115 x 230	180	GL 15	100	147183
115 x 230	240	GL 15	100	147184
115 x 230	320	GL 15	100	147185

Strips with paper backing, self-fastening

Coated abrasives

Abrasive film, active coated, self fastening

FP 73 WK



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	Film

Applications:

Paint/Varnish/Filler	●
Plastic	○

Advantages: Special product with highly tear-resistant film backing for use on paint, varnish and fillers - Very good adaptation and excellent grit adhesion also in the edge area - Substantially reduced clogging and significantly longer service life

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

All sizes and minimum purchasing quantities available on request

Abrasive film, self-fastening, waterproof

FP 77 K T-ACT



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	Film

Applications:

Paint/Varnish/Filler	●	Composite materials	●
Primer	●	Plastic	●
Filler	●		
Gel coats	●		

Advantages: New high-performance product with optimized clogging behaviour - Increased service life due to the new coating, which prevents the adhesion of paint and dust particles - For fine sanding in the fine grit range 240 - 2000, a highly flexible and completely flat film backing is used for highest surface quality

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
80 x 133	320	 GL 18	100	353119

Strips with paper backing, self-fastening / Abrasive screen

Coated abrasives



Abrasive paper, self-fastening

PS 77 CK T-ACT



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	C-paper

Applications:

Paint/Varnish/Filler	●	Composite materials	●
Primer	●	Plastic	○
Filler	●		
Gel coats	●		

Advantages: New high-performance product with optimized clogging behaviour - Increased service life due to the new coating, which prevents the adhesion of paint and dust particles - For aggressive grinding at high loads, a flexible and tear-resistant C-latex paper is used in the grit range 60-220

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
80 x 133	80	GL 18	100	353126
80 x 133	100	GL 18	100	353125
80 x 133	120	GL 18	100	353124
80 x 133	150	GL 18	100	353123
80 x 133	220	GL 18	100	353121

Abrasive screen, self-fastening, waterproof

AN 400



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Backing	Polyester screen

Applications:

Paint/Varnish/Filler	●	Composite materials	●
Gel coats	●	Wood	●
Plaster	●	Wood-based materials	●
Plasterboard walls	●		

Advantages: Effective and full-surface dust extraction thanks to open grid structure - Dust-free grinding extends the service life of the abrasive - At the same time, improved health and safety thanks to reduced dust formation at the work station - Independent of existing extraction hole patterns - Waterproof

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
80 x 133	80	Screen	50	337892
80 x 133	120	Screen	50	337890
80 x 133	150	Screen	50	337894
80 x 133	180	Screen	50	337889
80 x 133	240	Screen	50	337893
80 x 133	400	Screen	50	337896

Self-fastening support / Hand block

Self-fastening support

CS 396 Y



Properties

Engaging elements	Mushroom heads
Thickness	1,5 mm
Temperature range	-30° to +80°

Advantages: Can be cut to size easily - Simple and safe fixing on smooth and even surfaces - Allows a quick change of the abrasive

All sizes and minimum purchasing quantities available on request

Hand block, self fastening

HK 100



Advantages: Excellent for flat and slightly convex surfaces - Fatigue-proof hand sanding due to ergonomic form - For strips in 70 x 125 mm

Self-fastening

Width x Length x Height
in mm

Packing
unit/pcs.

Cat.
number

68 x 118 x 40

1

185320

Sheets with cloth backing

Coated abrasives



Abrasive cloth, brown

KL 361 JF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	JF-cotton

Applications:

Steel	●
Metals	●
NF metals	●
Wood	●

Stainless steel	●
Plastic	○

Advantages: High-quality universal product - Optimal adaptation to the workpiece due to highly flexible cotton backing - Tears off cleanly and easily

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
230 x 280	40	50	2084
230 x 280	50	50	2085
230 x 280	60	50	2086
230 x 280	80	50	2087
230 x 280	100	50	2088
230 x 280	120	50	2089
230 x 280	150	50	2090
230 x 280	180	50	2091
230 x 280	220	50	2092
230 x 280	240	50	2093
230 x 280	280	50	2094
230 x 280	320	50	2095
230 x 280	360	50	2096
230 x 280	400	50	2097
230 x 280	500	50	2098
230 x 280	600	50	5334

Sheets with cloth backing

Coated abrasives

Abrasive cloth

KL 371 X



Properties

Bonding agent	Glue
Grain	Aluminium oxide
Coating	Close
Backing	X-cotton

Applications:

Metals	●
NF metals	●

Advantages: Attractively priced universal product for surface hand grinding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
230 x 280	40	50	2100
230 x 280	50	50	2101
230 x 280	60	50	2102
230 x 280	80	50	2103
230 x 280	100	50	2104
230 x 280	120	50	2105
230 x 280	150	50	2106
230 x 280	180	50	2107
230 x 280	220	50	2108
230 x 280	240	50	2109
230 x 280	280	50	119885
230 x 280	320	50	119886
230 x 280	400	50	119888

Sheets with cloth backing

Coated abrasives



Abrasive cloth, brown

KL 385 JF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	JF-cotton

Applications:

Wood	●
Metals	●
NF metals	●
Stainless steel	ⓘ

Plastic	ⓘ
---------	---

Advantages: Attractively priced universal product for profile grinding - Optimal adaptation to the workpiece due to highly flexible cotton backing - Tears off cleanly and easily

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
230 x 280	40	50	218047
230 x 280	60	50	218050
230 x 280	80	50	218051
230 x 280	100	50	218052
230 x 280	120	50	218053
230 x 280	150	50	218054
230 x 280	180	50	218055
230 x 280	220	50	218056
230 x 280	240	50	218057
230 x 280	280	50	218058
230 x 280	320	50	218059
230 x 280	400	50	218061
230 x 280	600	50	218063

Strips with cloth backing

Coated abrasives

Abrasive cloth, brown

KL 361 JF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	JF-cotton

Applications:

Steel	●	Stainless steel	●
Metals	●	Plastic	○
NF metals	●		
Wood	●		

Advantages: High-quality universal product - Optimal adaptation to the workpiece due to highly flexible cotton backing - Tears off cleanly and easily

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
115 x 280	40	GL 0	100	73953
115 x 280	60	GL 0	100	74436
115 x 280	80	GL 0	100	72227
115 x 280	120	GL 0	100	72488

Abrasive block, flexible, coated on 4 sides, waterproof

SK 500



Properties

Grain	Aluminium oxide
Coating	Close

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	○
Metals	○

Advantages: Can be used flat and upright (four usable sides) - For flat and profiled surfaces due to flexible foam core - Robust, washable and reusable

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length x Height in mm	Grit	Density	Grit color	Foam color	Packing unit/pcs.	Cat. number
70 x 100 x 25	60	hard	brown	grey	100	125279
70 x 100 x 25	80	hard	brown	grey	100	225165
70 x 100 x 25	100	hard	brown	grey	100	125280
70 x 100 x 25	120	hard	brown	grey	100	225166
70 x 100 x 25	180	hard	brown	grey	100	225167
70 x 100 x 25	220	hard	brown	grey	100	225168
70 x 100 x 25	280	hard	brown	grey	100	225169

Abrasive block, flexible, coated on 4 sides, waterproof

SK 700 A



Properties

Grain	Aluminium oxide
Coating	Close

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	○
Metals	○

Advantages: Can be used flat and upright (four usable sides) - The angled edge (approx. 45°) makes it an exceptional choice for narrow, tapering workpiece contours - Excellent contouring and pressure distribution thanks to flexible foam core - Robust, washable and reusable

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2000	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length x Height in mm	Grit	Density	Grit color	Foam color	Packing unit/pcs.	Cat. number
89 x 125 x 25	60	hard	brown	grey	100	337846
89 x 125 x 25	80	hard	brown	grey	100	337847
89 x 125 x 25	100	hard	brown	grey	100	337848
89 x 125 x 25	120	hard	brown	grey	100	331019
89 x 125 x 25	150	hard	brown	grey	100	362250
89 x 125 x 25	220	hard	brown	grey	100	362251

Abrasive sponge

Abrasive sponge, flexible, coated on 2 sides, waterproof

SW 501



Properties

Grain	Aluminium oxide
Coating	Close

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	○
Metals	○

Advantages: Satin surface scratch pattern - For low and high profiled surfaces (two usable sides) - Crease and break resistant - Washable and reusable

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2000	3000
Width x Length x Height in mm							Grit	Density	Grit color	Foam color	Packing unit/pcs.	Cat. number														
96 x 123 x 12,5							120	soft	brown	yellow	100	125281														
96 x 123 x 12,5							220	soft	brown	yellow	100	125282														

Abrasive sponge, flexible, coated on 2 sides, tear-resistant, waterproof

SW 501 TR



Properties

Grain	Aluminium oxide
Coating	Close

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	○
Metals	○

Advantages: Satin surface scratch pattern - For low and high profiled surfaces (two usable sides) - Crease and break-resistant - Washable and reusable - Extremely tear-resistant - Solvent free bonding with grit size dependent colouring

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
Width x Length x Height in mm								Grit	Density	Grit color		Foam color		Packing unit/pcs.	Cat. number											
96 x 123 x 12,5								100	soft	light brown		yellow		100	351573											
96 x 123 x 12,5								120	soft	green		yellow		100	353264											
96 x 123 x 12,5								150	soft	red		yellow		100	353263											
96 x 123 x 12,5								180	soft	blue		yellow		100	351574											
96 x 123 x 12,5								220	soft	brown		yellow		100	353262											

Abrasive sponge, flexible, coated on 2 sides, waterproof

SW 502



Properties

Grain	SiC
Coating	Close

Applications:

Paint/Varnish/Filler	●
Plastic	●
Wood	○
Metal	○

Advantages: For low and high profiled surfaces (two usable sides) - Crease and break resistant - Washable and reusable

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2000	3000
Width x Length x Height in mm							Grit	Density	Grit color		Foam color		Packing unit/pcs.		Cat. number											
96 x 123 x 12,5							120	soft	black		yellow		100		244377											
96 x 123 x 12,5							220	soft	black		yellow		100		244379											

Abrasive sponge, flexible, coated on 1 side, waterproof

SW 510



Properties

Grain	Aluminium oxide
Coating	Close

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	○
Metals	○

Advantages: Thin, ultra flexible sanding sponge for particularly hard-to-reach areas such as indentations, profiles and edges - Tight foam structure, allowing for exceptionally uniform pressure distribution and an extra fine finish - No bending, no creases - Can be used wet and dry

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
Width x Length x Height in mm								Grit	Density	Grit color		Foam color		Packing unit/pcs.	Cat. number											
115 x 140 x 5								100	hard	white		grey		100	303588											
115 x 140 x 5								180	hard	white		grey		100	303589											
115 x 140 x 5								220	hard	white		grey		100	303590											
115 x 140 x 5								320	hard	white		grey		100	337849											

Discs with paper backing

Coated abrasives

Abrasive paper, waterproof

PS 11 C





Properties		Applications:	
Bonding agent	Resin	Paint/Varnish/Filler	●
Grain	SiC	Metals	●
Coating	Close	Glass/Stone	○
Backing	C-paper	Plastic	○

Advantages: Special product for auto repair and painting - Ideal for hard and tough surfaces - Excellent adaptation of the disc while maintaining high stability - Can be used for wet and dry grinding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

All sizes and minimum purchasing quantities available on request

Discs with paper backing, self-fastening

Coated abrasives



Abrasive paper, self-fastening

PS 19 EK



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	E-paper

Applications:

Wood	●
Paint/Varnish/Filler	●
Plastic	●
Glass/Stone	●

Advantages: Hard and sharp silicon carbide grain for hard and tough materials - Resistant high-performance disc with a stable E-paper backing for rough, intermediate and finish sanding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
115	40	○ 0	50	287798
115	60	○ 0	50	300290
115	80	○ 0	50	305763
115	100	○ 0	50	311087
115	120	○ 0	50	300291
115	220	○ 0	50	309073
115	320	○ 0	50	321743
115	400	○ 0	50	321744
115	600	○ 0	50	322637

Abrasive paper, self-fastening

PS 21 FK



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close
Backing	F-paper

Applications:

Steel	●
Stainless steel	●
Metals	●

Advantages: Aggressive abrasive behavior due to self-sharpening zirconia alumina - Optimal recipe for rough grinding and finish grinding of stainless steel - Long service life

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
115	40	○ 0	50	237224
115	60	○ 0	50	248808
115	80	○ 0	50	249326
115	100	○ 0	50	263425



Discs with paper backing, self-fastening

Coated abrasives

►► Continuation of PS 21 FK, Abrasive paper, self-fastening

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
115	120	○ 0	50	249327
115	150	○ 0	50	248809
115	180	○ 0	50	251760
115	240	○ 0	50	255347
115	320	○ 0	50	259372
115	400	○ 0	50	259636
125	40	○ 0	50	246857
125	60	○ 0	50	237780
125	80	○ 0	50	237781
125	100	○ 0	50	236751
125	120	○ 0	50	237782
125	150	○ 0	50	255348
125	180	○ 0	50	237783
125	240	○ 0	50	237785
125	320	○ 0	50	237786
125	400	○ 0	50	237787
150	40	○ 0	50	230312
150	60	○ 0	50	230313
150	80	○ 0	50	230314
150	120	○ 0	50	246488
150	150	○ 0	50	239244
150	240	○ 0	50	251509
180	40	○ 0	50	257707
180	60	○ 0	50	257710
180	80	○ 0	50	256056
180	100	○ 0	50	257711
180	120	○ 0	50	258691
180	150	○ 0	50	258692
180	180	○ 0	50	324841
180	240	○ 0	50	324842
180	320	○ 0	50	324904
180	400	○ 0	50	312898

Discs with paper backing, self-fastening

Coated abrasives



Abrasive paper, self-fastening

PS 22 K



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	E-paper

Applications:

Wood	●
Metals	●
Stainless steel	○
Paint/Varnish/Filler	○

Plastic ○



Advantages: Universal abrasive disc for metalworking and woodworking - Uniform surface scratch pattern - Available in many grit sizes and dimensions

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
96	40	△ GLS 15	50	142134
96	60	△ GLS 15	50	142135
96	80	△ GLS 15	50	142136
96	100	△ GLS 15	50	145055
96	120	△ GLS 15	50	142137
96	150	△ GLS 15	50	146336
96	180	△ GLS 15	50	142138
96	240	△ GLS 15	50	142139

Abrasive paper, self-fastening

PS 22 K



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	E-paper

Applications:

Wood	●
Metals	●
Stainless steel	○
Paint/Varnish/Filler	○

Plastic ○



Advantages: Universal abrasive disc for metalworking and woodworking - Uniform surface scratch pattern - Available in many grit sizes and dimensions

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
115	24	○ 0	50	6754
115	40	○ 0	50	2785
115	60	○ 0	50	2786
115	80	○ 0	50	6756
115	100	○ 0	50	2787



Discs with paper backing, self-fastening

Coated abrasives

►► Continuation of PS 22 K, Abrasive paper, self-fastening

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
115	120	○ 0	50	6757
115	150	○ 0	50	80046
115	180	○ 0	50	2788
115	220	○ 0	50	88330
115	240	○ 0	50	88333
115	320	○ 0	50	95561
115	400	○ 0	50	111470
115	40	⊗ GLS 4	50	82938
115	60	⊗ GLS 4	50	82940
115	80	⊗ GLS 4	50	82941
115	100	⊗ GLS 4	50	82942
115	120	⊗ GLS 4	50	82944
115	150	⊗ GLS 4	50	82945
115	180	⊗ GLS 4	50	82946
115	220	⊗ GLS 4	50	333951
115	240	⊗ GLS 4	50	87424
125	24	○ 0	50	7300
125	40	○ 0	50	2294
125	60	○ 0	50	2295
125	80	○ 0	50	6774
125	100	○ 0	50	2296
125	120	○ 0	50	6775
125	150	○ 0	50	78163
125	180	○ 0	50	62107
125	220	○ 0	50	97176
125	240	○ 0	50	91922
125	320	○ 0	50	93284
125	400	○ 0	50	130114
125	24	⊗ GLS 5	50	89485
125	40	⊗ GLS 5	50	89486
125	60	⊗ GLS 5	50	89488
125	80	⊗ GLS 5	50	89489
125	100	⊗ GLS 5	50	89491
125	120	⊗ GLS 5	50	89493
125	150	⊗ GLS 5	50	89494
125	180	⊗ GLS 5	50	89495
125	220	⊗ GLS 5	50	90758
125	240	⊗ GLS 5	50	92753
125	320	⊗ GLS 5	50	89496
125	400	⊗ GLS 5	50	104778
125	40	⊗ GLS 27	50	260795
125	60	⊗ GLS 27	50	260796
125	80	⊗ GLS 27	50	260797
125	100	⊗ GLS 27	50	260798
125	120	⊗ GLS 27	50	260799
125	150	⊗ GLS 27	50	260800
125	180	⊗ GLS 27	50	260801
125	240	⊗ GLS 27	50	260802
150	24	○ 0	50	2474
150	40	○ 0	50	20207
150	60	○ 0	50	6649



Discs with paper backing, self-fastening

Coated abrasives



►► Continuation of PS 22 K, Abrasive paper, self-fastening

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
150	80	○ 0	50	6936
150	100	○ 0	50	6697
150	120	○ 0	50	6937
150	150	○ 0	50	71140
150	180	○ 0	50	4022
150	220	○ 0	50	93324
150	240	○ 0	50	91605
150	320	○ 0	50	91721
150	400	○ 0	50	129092
150	24	⊗ GLS 1	50	6516
150	40	⊗ GLS 1	50	6520
150	60	⊗ GLS 1	50	6523
150	80	⊗ GLS 1	50	6524
150	100	⊗ GLS 1	50	6525
150	120	⊗ GLS 1	50	6526
150	150	⊗ GLS 1	50	80722
150	180	⊗ GLS 1	50	6611
150	220	⊗ GLS 1	50	98990
150	240	⊗ GLS 1	50	89451
150	320	⊗ GLS 1	50	89450
150	400	⊗ GLS 1	50	129389
150	40	⊗ GLS 2	50	74088
150	60	⊗ GLS 2	50	72633
150	80	⊗ GLS 2	50	72632
150	100	⊗ GLS 2	50	73490
150	120	⊗ GLS 2	50	72628
150	150	⊗ GLS 2	50	79862
150	180	⊗ GLS 2	50	72624
150	240	⊗ GLS 2	50	91814
150	24	⊗ GLS 3	50	93321
150	40	⊗ GLS 3	50	89181
150	60	⊗ GLS 3	50	86634
150	80	⊗ GLS 3	50	86635
150	100	⊗ GLS 3	50	97072
150	120	⊗ GLS 3	50	86636
150	150	⊗ GLS 3	50	86637
150	180	⊗ GLS 3	50	87528
150	220	⊗ GLS 3	50	100157
150	240	⊗ GLS 3	50	97778
150	320	⊗ GLS 3	50	97779
150	400	⊗ GLS 3	50	128356
150	60	⊗ GLS 47	50	308907
150	80	⊗ GLS 47	50	315677
150	100	⊗ GLS 47	50	311150
150	120	⊗ GLS 47	50	308908
150	150	⊗ GLS 47	50	305980
150	180	⊗ GLS 47	50	311151
150	240	⊗ GLS 47	50	311152
150	40	⊗ GLS 51	50	306611
150	60	⊗ GLS 51	50	306612
150	80	⊗ GLS 51	50	305559



Discs with paper backing, self-fastening

Coated abrasives

►► Continuation of PS 22 K, Abrasive paper, self-fastening

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
150	100	⊗ GLS 51	50	306507
150	120	⊗ GLS 51	50	305560
150	150	⊗ GLS 51	50	306508
150	180	⊗ GLS 51	50	306509
150	220	⊗ GLS 51	50	310618
150	240	⊗ GLS 51	50	309471
150	320	⊗ GLS 51	50	309472
150	40	⊗ GLS 74	50	342419
150	60	⊗ GLS 74	50	342418
150	80	⊗ GLS 74	50	340766
150	100	⊗ GLS 74	50	342423
150	120	⊗ GLS 74	50	342159
150	150	⊗ GLS 74	50	342422
150	180	⊗ GLS 74	50	342421
150	240	⊗ GLS 74	50	340761
180	24	○ 0	50	2782
180	40	○ 0	50	2476
180	60	○ 0	50	2477
180	80	○ 0	50	6914
180	100	○ 0	50	2783
180	120	○ 0	50	6915
200	40	○ 0	50	77659
200	60	○ 0	50	77660
200	80	○ 0	50	77656
200	100	○ 0	50	77658
200	120	○ 0	50	77661
300	40	○ 0	50	20209
300	60	○ 0	50	20220
300	80	○ 0	50	25565
300	100	○ 0	50	20372
300	120	○ 0	50	62094
300	150	○ 0	50	277930
300	180	○ 0	50	159121
300	220	○ 0	50	211180
300	240	○ 0	50	265059

Discs with paper backing, self-fastening

Coated abrasives



Abrasive paper, self-fastening

PS 33 CK




Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	C-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	⦿

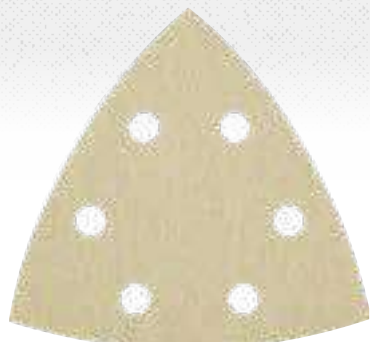

Advantages: Improved abrasive and stock removal performance thanks to special heat-tempered aluminium oxide abrasive grain - Reduced clogging thanks to sanding active fillers in the size coat and the semi-open coating - Outstanding flexibility paired with good stability and tear resistance thanks to latex impregnated paper backing

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
96	40	△ GLS 15	100	147163
96	60	△ GLS 15	100	147164
96	80	△ GLS 15	100	147165
96	100	△ GLS 15	100	147166
96	120	△ GLS 15	100	148195

Abrasive paper, self-fastening

PS 33 CK



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	C-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	⦿



Advantages: Improved abrasive and stock removal performance thanks to special heat-tempered aluminium oxide abrasive grain - Reduced clogging thanks to sanding active fillers in the size coat and the semi-open coating - Outstanding flexibility paired with good stability and tear resistance thanks to latex impregnated paper backing

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
98 x 148	40	△ GLS 24	100	215472
98 x 148	60	△ GLS 24	100	215473
98 x 148	80	△ GLS 24	100	215474
98 x 148	100	△ GLS 24	100	215475
98 x 148	120	△ GLS 24	100	215476

Discs with paper backing, self-fastening

Coated abrasives

Abrasive paper, self-fastening

PS 33 BK



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	⦿

Advantages: Improved abrasive and stock removal performance thanks to special heat-tempered aluminium oxide abrasive grain - Reduced clogging thanks to sanding active fillers in the size coat and the semi-open coating - Outstanding flexibility paired with good stability and tear resistance thanks to latex impregnated paper backing


Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
98 x 148	150	⦿ GLS 24	100	215477
98 x 148	180	⦿ GLS 24	100	215478
98 x 148	220	⦿ GLS 24	100	215479
98 x 148	240	⦿ GLS 24	100	215480
98 x 148	320	⦿ GLS 24	100	215482

Abrasive paper, self-fastening

PS 33 CK



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	C-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	⦿

Advantages: Improved abrasive and stock removal performance thanks to special heat-tempered aluminium oxide abrasive grain - Reduced clogging thanks to sanding active fillers in the size coat and the semi-open coating - Outstanding flexibility paired with good stability and tear resistance thanks to latex impregnated paper backing

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
115	80	○ 0	100	147144
125	40	○ 0	100	154113
125	60	○ 0	100	147604
125	80	○ 0	100	149055
125	100	○ 0	100	150431
125	120	○ 0	100	150433
125	40	⊗ GLS 5	100	146954
125	60	⊗ GLS 5	100	147642



Discs with paper backing, self-fastening

Coated abrasives



►► Continuation of PS 33 CK, Abrasive paper, self-fastening

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
125	80	⊙ GLS 5	100	147643
125	100	⊙ GLS 5	100	147977
125	120	⊙ GLS 5	100	147170
125	60	⊙ GLS 27	100	288180
125	80	⊙ GLS 27	100	264929
125	120	⊙ GLS 27	100	264930
150	40	○ 0	100	147922
150	60	○ 0	100	147107
150	80	○ 0	100	146739
150	100	○ 0	100	147106
150	120	○ 0	100	146740
150	40	⊙ GLS 1	100	146978
150	60	⊙ GLS 1	100	146979
150	80	⊙ GLS 1	100	143130
150	100	⊙ GLS 1	100	143131
150	120	⊙ GLS 1	100	147093
150	40	⊙ GLS 3	100	147647
150	60	⊙ GLS 3	100	147124
150	80	⊙ GLS 3	100	146946
150	100	⊙ GLS 3	100	143694
150	120	⊙ GLS 3	100	146947
150	60	⊙ GLS 47	100	306837
150	80	⊙ GLS 47	100	305758
150	100	⊙ GLS 47	100	306838
150	120	⊙ GLS 47	100	305759
150	40	⊙ GLS 51	100	310531
150	60	⊙ GLS 51	100	301874
150	80	⊙ GLS 51	100	301925
150	100	⊙ GLS 51	100	301926
150	120	⊙ GLS 51	100	301927
150	40	⊙ GLS 74	100	340853
150	60	⊙ GLS 74	100	340370
150	80	⊙ GLS 74	100	340371
150	100	⊙ GLS 74	100	342046
150	120	⊙ GLS 74	100	340375
225	40	○ 0	50	223162
225	60	○ 0	50	210124
225	80	○ 0	50	210129
225	100	○ 0	50	224731
225	120	○ 0	50	210130
225	40	⊙ GLS 38	50	292414
225	60	⊙ GLS 38	50	292435
225	80	⊙ GLS 38	50	292436
225	100	⊙ GLS 38	50	294609
225	120	⊙ GLS 38	50	292437
225	40	⊙ GLS 52	50	302042
225	60	⊙ GLS 52	50	302043
225	80	⊙ GLS 52	50	302044
225	100	⊙ GLS 52	50	302045
225	120	⊙ GLS 52	50	302046
225	40	⊙ GLS 55	50	314427



Discs with paper backing, self-fastening

Coated abrasives

►► Continuation of PS 33 CK, Abrasive paper, self-fastening

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
225	60	⊗ GLS 55	50	312448
225	80	⊗ GLS 55	50	312449
225	100	⊗ GLS 55	50	312450
225	120	⊗ GLS 55	50	312451

Abrasive paper, self-fastening

PS 33 BK



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	●

Advantages: Improved abrasive and stock removal performance thanks to special heat-tempered aluminium oxide abrasive grain - Reduced clogging thanks to sanding active fillers in the size coat and the semi-open coating - Outstanding flexibility paired with good stability and tear resistance thanks to latex impregnated paper backing

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
125	150	○ 0	100	153152
125	180	○ 0	100	150435
125	220	○ 0	100	155143
125	240	○ 0	100	150460
125	320	○ 0	100	150461
125	400	○ 0	100	150462
125	150	⊗ GLS 5	100	150760
125	180	⊗ GLS 5	100	147837
125	220	⊗ GLS 5	100	150259
125	240	⊗ GLS 5	100	147838
125	320	⊗ GLS 5	100	147839
125	400	⊗ GLS 5	100	147644
125	600	⊗ GLS 5	100	175988
125	180	⊗ GLS 27	100	282515
125	240	⊗ GLS 27	100	282516
125	320	⊗ GLS 27	100	283465
150	150	○ 0	100	148375
150	180	○ 0	100	146958
150	220	○ 0	100	149916
150	240	○ 0	100	146959
150	320	○ 0	100	146716
150	400	○ 0	100	147108
150	150	⊗ GLS 1	100	148379
150	180	⊗ GLS 1	100	147095
150	220	⊗ GLS 1	100	149794
150	240	⊗ GLS 1	100	147094



Discs with paper backing, self-fastening

Coated abrasives



►► Continuation of PS 33 BK, Abrasive paper, self-fastening

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
150	320	⊗ GLS 1	100	147096
150	400	⊗ GLS 1	100	147097
150	180	⊙ GLS 2	100	147224
150	150	⊙ GLS 3	100	149151
150	180	⊙ GLS 3	100	146948
150	220	⊙ GLS 3	100	149255
150	240	⊙ GLS 3	100	146907
150	320	⊙ GLS 3	100	147126
150	400	⊙ GLS 3	100	147125
150	150	⊗ GLS 47	100	306839
150	180	⊗ GLS 47	100	306840
150	240	⊗ GLS 47	100	306842
150	320	⊗ GLS 47	100	306844
150	150	⊗ GLS 51	100	301928
150	180	⊗ GLS 51	100	304084
150	220	⊗ GLS 51	100	301929
150	240	⊗ GLS 51	100	304815
150	320	⊗ GLS 51	100	301930
150	400	⊗ GLS 51	100	310898
150	150	⊗ GLS 74	100	342045
150	180	⊗ GLS 74	100	340598
150	220	⊗ GLS 74	100	342044
150	240	⊗ GLS 74	100	340599
150	320	⊗ GLS 74	100	342043
150	400	⊗ GLS 74	100	342042
225	150	○ 0	50	251230
225	180	○ 0	50	214629
225	220	○ 0	50	233622
225	240	○ 0	50	292193
225	150	⊗ GLS 38	50	293646
225	180	⊗ GLS 38	50	293647
225	220	⊗ GLS 38	50	293648
225	240	⊗ GLS 38	50	309010
225	150	⊙ GLS 52	50	302047
225	180	⊙ GLS 52	50	302048
225	220	⊙ GLS 52	50	302049
225	240	⊙ GLS 52	50	327940
225	150	⊗ GLS 55	50	312452
225	180	⊗ GLS 55	50	314428
225	220	⊗ GLS 55	50	335916
225	240	⊗ GLS 55	50	668075

Discs with paper backing, self-fastening

Coated abrasives

CEVOLUTION

Abrasive paper, self-fastening, CEVOLUTION

PS 61 FK CEVOLUTION



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close
Backing	F-paper

Applications:

Stainless steel	●
Steel	●
Wood	●

Advantages: Continuously aggressive abrasive performance - High-performance abrasive disc for stainless steel grinding - Also very good results in repair grinding of parquet flooring - The PS 61 FK includes the new CEVOLUTION technology. CEVOLUTION stands for holistically optimized, ceramic abrasives. Klingspor products with CEVOLUTION technology contain, among others, an optimized grit mix, grit sizes and formulation in order to offer the maximum performance in every application.

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
115	80	○ 0	50	325556
115	120	○ 0	50	322315
115	180	○ 0	50	321972
115	240	○ 0	50	328810
125	60	○ 0	50	322468
125	80	○ 0	50	321597
125	120	○ 0	50	322469
125	150	○ 0	50	322470
125	180	○ 0	50	322471
150	60	○ 0	50	322036
150	80	○ 0	50	321325
150	120	○ 0	50	322472
150	180	○ 0	50	321797

Discs with film backing, self-fastening

Coated abrasives



Abrasive film, active coated, self fastening

FP 73 WK



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	Film

Applications:

Paint/Varnish/Filler	●
Plastic	○



Advantages: Special product with highly tear-resistant film backing for use on paint, varnish and fillers - Very good adaptation of the discs with excellent grit adhesion also in the edge area - Substantially reduced clogging and significantly longer service life

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
150	240	○ 0	100	322397
150	80	⊗ GLS 47	100	320641
150	100	⊗ GLS 47	100	320642
150	120	⊗ GLS 47	100	320643
150	150	⊗ GLS 47	100	320644
150	180	⊗ GLS 47	100	320725
150	240	⊗ GLS 47	100	320726
150	320	⊗ GLS 47	100	320727
150	400	⊗ GLS 47	100	320728
150	600	⊗ GLS 47	100	320729
150	800	⊗ GLS 47	100	320730
150	1200	⊗ GLS 47	100	320732

Discs with paper backing, self-fastening

Coated abrasives

Abrasive paper, actively coated,
self-fastening

PS 73 CWK



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	C-paper

Applications:

Paint/Varnish/Filler	●
Plastic	○

Advantages: High-quality product for use on varnish, paint and filler - High removal rate - Substantially reduced clogging and significantly longer service life due to additional special coating

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
150	40	○ 0	100	301231
150	60	○ 0	100	301232
150	80	○ 0	100	301233
150	100	○ 0	100	301234
150	120	○ 0	100	301235
150	40	⊗ GLS 1	100	301205
150	80	⊗ GLS 1	100	301207
150	120	⊗ GLS 1	100	301209
150	40	⊗ GLS 3	100	301218
150	60	⊗ GLS 3	100	301219
150	80	⊗ GLS 3	100	301220
150	100	⊗ GLS 3	100	301221
150	120	⊗ GLS 3	100	301222
150	40	⊗ GLS 47	100	301810
150	60	⊗ GLS 47	100	301811
150	80	⊗ GLS 47	100	301812
150	100	⊗ GLS 47	100	301813
150	120	⊗ GLS 47	100	301814
150	80	⊗ GLS 51	100	310524
150	120	⊗ GLS 51	100	310478

Discs with paper backing, self-fastening

Coated abrasives



Abrasive paper, actively coated,
self-fastening

PS 73 BWK



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper

Applications:

Paint/Varnish/Filler	●
Plastic	○

Advantages: High-quality product for use on varnish, paint and filler - High removal rate - Substantially reduced clogging and significantly longer service life due to additional special coating

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
150	150	○ 0	100	301236
150	180	○ 0	100	301237
150	220	○ 0	100	301238
150	240	○ 0	100	301239
150	320	○ 0	100	301240
150	400	○ 0	100	301241
150	500	○ 0	100	301937
150	800	○ 0	100	301886
150	1000	○ 0	100	301891
150	320	⊗ GLS 1	100	301214
150	600	⊗ GLS 1	100	301217
150	150	⊗ GLS 3	100	301223
150	180	⊗ GLS 3	100	301224
150	220	⊗ GLS 3	100	301225
150	240	⊗ GLS 3	100	301226
150	320	⊗ GLS 3	100	301227
150	400	⊗ GLS 3	100	301228
150	600	⊗ GLS 3	100	301230
150	800	⊗ GLS 3	100	301889
150	150	⊗ GLS 47	100	301855
150	180	⊗ GLS 47	100	301856
150	220	⊗ GLS 47	100	301857
150	240	⊗ GLS 47	100	301858
150	320	⊗ GLS 47	100	301859
150	400	⊗ GLS 47	100	301860
150	500	⊗ GLS 47	100	301861
150	600	⊗ GLS 47	100	301862
150	800	⊗ GLS 47	100	307051
150	180	⊗ GLS 51	100	310525
150	220	⊗ GLS 51	100	310526
150	240	⊗ GLS 51	100	309093



Discs with film backing, self-fastening

Coated abrasives

►► Continuation of PS 73 BWK, Abrasive paper, actively coated, self-fastening

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
150	320	⊗ GLS 51	100	309094
150	500	⊗ GLS 51	100	310528
150	600	⊗ GLS 51	100	310529
150	800	⊗ GLS 51	100	310530

Abrasive film, self-fastening, waterproof

FP 77 K T-ACT




Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	Film

Applications:

Paint/Varnish/Filler	●	Composite materials	●
Primer	●	Plastic	●
Filler	●		
Gel coats	●		



Advantages: New high-performance disc with optimized clogging behaviour - Increased service life due to the new coating, which prevents the adhesion of paint and dust particles - For fine sanding in the fine grit range 240 - 2000, a highly flexible and completely flat film backing is used for highest surface quality

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
125	240	○ 0	100	353177
125	320	○ 0	100	353175
125	400	○ 0	100	353174
125	600	○ 0	100	353172
125	240	⊗ GLS 5	100	353162
125	280	⊗ GLS 5	100	353161
125	320	⊗ GLS 5	100	353169
125	400	⊗ GLS 5	100	353160
125	500	⊗ GLS 5	100	353159
125	600	⊗ GLS 5	100	353158
125	240	⊗ GLS 27	100	353168
125	320	⊗ GLS 27	100	353166
125	400	⊗ GLS 27	100	353165
125	500	⊗ GLS 27	100	353164
125	600	⊗ GLS 27	100	353163
150	240	○ 0	100	353157
150	320	○ 0	100	353156
150	400	○ 0	100	353155
150	600	○ 0	100	353153
150	400	⊗ GLS 1	100	353150
150	500	⊗ GLS 1	100	353149
150	600	⊗ GLS 1	100	353148
150	800	⊗ GLS 1	100	353147
150	240	⊗ GLS 3	100	353146
150	320	⊗ GLS 3	100	353145
150	400	⊗ GLS 3	100	353144



Discs with film / paper backing, self-fastening

Coated abrasives



►► Continuation of FP 77 K T-ACT, Abrasive film, self fastening, waterproof

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
150	500	⊙ GLS 3	100	353143
150	600	⊙ GLS 3	100	353142
150	240	⊙ GLS 47	100	353141
150	320	⊙ GLS 47	100	353138
150	400	⊙ GLS 47	100	353136
150	500	⊙ GLS 47	100	353135
150	600	⊙ GLS 47	100	353140
150	800	⊙ GLS 47	100	353134
150	1000	⊙ GLS 47	100	353133
150	1200	⊙ GLS 47	100	353132
150	1500	⊙ GLS 47	100	353131
150	2000	⊙ GLS 47	100	353130

Abrasive paper, self-fastening

PS 77 CK T-ACT




Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	C-paper

Applications:

Paint/Varnish/Filler	●	Composite materials	●
Primer	●	Plastic	○
Filler	●		
Gel coats	●		



Advantages: New high-performance disc with optimized clogging behaviour - Increased service life due to the new coating, which prevents the adhesion of paint and dust particles - For aggressive grinding at high loads, a flexible and tear-resistant C-latex paper is used in the grit range 60-220

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
125	60	○ 0	100	353219
125	80	○ 0	100	353224
125	120	○ 0	100	353223
125	150	○ 0	100	353225
125	180	○ 0	100	353222
125	220	○ 0	100	353218
125	60	⊙ GLS 5	100	353217
125	80	⊙ GLS 5	100	353216
125	100	⊙ GLS 5	100	353215
125	120	⊙ GLS 5	100	353214
125	150	⊙ GLS 5	100	353213
125	180	⊙ GLS 5	100	353212
125	220	⊙ GLS 5	100	353209
125	60	⊙ GLS 27	100	353220
125	80	⊙ GLS 27	100	353235
125	100	⊙ GLS 27	100	353234
125	120	⊙ GLS 27	100	353233
125	150	⊙ GLS 27	100	353232



Discs with paper backing, self-fastening / Abrasive screen

Coated abrasives

►► Continuation of PS 77 CK T-ACT, Abrasive paper, self-fastening

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
125	180	⊗ GLS 27	100	353231
125	220	⊗ GLS 27	100	353211
150	60	○ 0	100	353208
150	80	○ 0	100	353207
150	100	○ 0	100	353210
150	120	○ 0	100	353206
150	150	○ 0	100	353205
150	180	○ 0	100	353204
150	220	○ 0	100	353203
150	150	⊗ GLS 1	100	353198
150	180	⊗ GLS 1	100	353197
150	220	⊗ GLS 1	100	353196
150	60	⊗ GLS 3	100	353195
150	180	⊗ GLS 3	100	353190
150	220	⊗ GLS 3	100	353189
150	60	⊗ GLS 47	100	353188
150	80	⊗ GLS 47	100	353187
150	100	⊗ GLS 47	100	353186
150	120	⊗ GLS 47	100	353185
150	150	⊗ GLS 47	100	353182
150	180	⊗ GLS 47	100	353181
150	80	⊗ GLS 51	100	353184
150	100	⊗ GLS 51	100	353179
150	120	⊗ GLS 51	100	353183

Abrasive screen, self-fastening, waterproof

AN 400



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Backing	Polyester screen

Applications:

Paint/Varnish/Filler	●	Composite materials	●
Gel coats	●	Wood	●
Plaster	●	Wood-based materials	●
Plasterboard walls	●		



Advantages: Effective and full-surface dust extraction thanks to open grid structure - Dust-free grinding extends the service life of the abrasive - At the same time, improved health and safety thanks to reduced dust formation at the work station - Independent of existing extraction hole patterns - Waterproof

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
125	80	● Screen	50	337898
125	100	● Screen	50	337899
125	120	● Screen	50	337900
125	150	● Screen	50	337901
125	180	● Screen	50	337905
125	240	● Screen	50	337904



►► Continuation of AN 400, Abrasive screen, self-fastening, waterproof

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
125	320	● Screen	50	337903
125	400	● Screen	50	337902
125	600	● Screen	50	340402
150	80	● Screen	50	337886
150	100	● Screen	50	337887
150	120	● Screen	50	337885
150	150	● Screen	50	337884
150	180	● Screen	50	337883
150	220	● Screen	50	342146
150	240	● Screen	50	337888
150	320	● Screen	50	337876
150	400	● Screen	50	337877
150	600	● Screen	50	340193
225	80	● Screen	25	337871
225	100	● Screen	25	337875
225	120	● Screen	25	337873
225	150	● Screen	25	337874
225	180	● Screen	25	337872
225	240	● Screen	25	337878
225	320	● Screen	25	337879
225	400	● Screen	25	337880

Protection pad, self-fastening

PP 555 Retail packs



Advantages: Improvement of adhesion and protection of the backing pad on random orbital sanders

Diameter in mm	Suitable for	Packing unit/pcs.	Cat. number
125	Random orbital sander	2	370652
150	Random orbital sander	2	358148
225	Drywall sander	2	370662

Packing unit (Minimum order quantity) = 1 packs of 2 pads

Hand Block

Hand block, self fastening

HBD 125



NEW !



Advantages: Very suitable for surface and edge grinding - Fatigue-proof hand sanding due to ergonomic form - For self-fastening discs in diameter 125 mm - Self-fastening

Diameter in mm	Packing unit/pcs.	Cat. number
125	1	387039

Hand block, self fastening

HBD 150



NEW !



Advantages: Very suitable for surface and edge grinding - Fatigue-proof hand sanding due to ergonomic form - For self-fastening discs in diameter 150 mm - Self-fastening


Diameter in mm	Packing unit/pcs.	Cat. number
150	1	387044

Disc with foam material, self-fastening / Backing pads



Sanding disc with foam material,
self-fastening, waterproof

FD 500

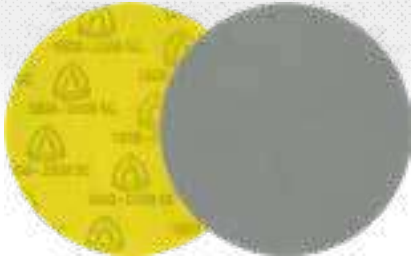

Properties

Bonding agent	Resin
Grain	Aluminium oxide/SiC
Backing	Foam material/ velours

Applications:

Paint/Varnish/Filler	●
----------------------	---

Advantages: Uniform pressure distribution thanks to elastic foam coating - Soft grinding and extremely fine scratch pattern - Superior flexibility and adaptability on contours and profiles - Exceptionally well suited for finish grinding - Suitable for wet and dry use - Available in grit 1000, 1500 (Aluminium oxide) and 2000, 3000 (SiC)

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
125	1000	○ 0	10	342291
125	1500	○ 0	10	342290
125	2000	○ 0	10	342289
125	3000	○ 0	10	342288
150	1000	○ 0	10	342294
150	1500	○ 0	10	342293
150	2000	○ 0	10	342295
150	3000	○ 0	10	342292

Self-fastening multihole backing pad for
random orbital sanders

HST 545



NEW !



Advantages: Very good adhesion for all velour-coated discs - Suitable for all standard hole patterns - Optimal running behaviour - Improved dust extraction due to multi-hole cover plate - Available in Medium and Soft - Adapter M8 and 5/16" included

Diameter in mm	Thread/Shaft	Density	Max. RPM	Packing unit/pcs.	Cat. number
150	thread M8/ 5/16"	soft	12000 rpm	1	384002
150	thread M8/ 5/16"	medium	12000 rpm	1	384003

Backing pads

Self-fastening multihole backing pad for random orbital sanders

HST 555



Advantages: Very good adhesion for all velour-coated discs due to fine, heat resistant self-fastening coating - For all standard hole patterns, also for netlike and diverse multihole patterns - Compatible with all standard orbital sanders

Diameter in mm	Adaptor	Thread/Shaft	Density	Max. RPM	Packing unit/pcs.	Cat. number
150	Festool adaptor	thread M8/ 5/16"	soft	12000 rpm	1	320488
150	Festool adaptor	thread M8/ 5/16"	medium	12000 rpm	1	320489
150	Festool adaptor	thread M8/ 5/16"	hard	12000 rpm	1	320587

Self-fastening multihole backing pad for random orbital sanders

HST 555 A



Advantages: Very good adhesion for all velour-coated discs due to fine, heat resistant self-fastening coating - For all standard hole patterns, also for netlike and diverse multihole patterns - Self-fastening backing pad compatible with BOSCH random orbital sanders of the GEX series with star-shaped mounting

Diameter in mm	Adaptor	Thread/Shaft	Density	Max. RPM	Packing unit/pcs.	Cat. number
150	Bosch adaptor	thread M8	medium	12000 rpm	1	320490

Discs with cloth backing, self-fastening

Coated abrasives



Abrasive cloth, self-fastening

CS 411 XK



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close
Backing	X-cotton

Applications:

Stainless steel	●
Steel	●
Metals	●
Wood	●

Advantages: Aggressive abrasive behaviour due to self-sharpening zirconia alumina - Resistant high-performance abrasive disc with tear-resistant cotton backing for rough and intermediate sanding on edges and surfaces

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
115	80	○ 0	50	279638
125	40	○ 0	50	291980
125	60	○ 0	50	182412
125	80	○ 0	50	238954
150	40	○ 0	50	301271
150	60	○ 0	50	64647
150	80	○ 0	50	285565

Abrasive cloth, self-fastening

CS 920 YK



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close
Backing	Y-polyester

Applications:

Stainless steel	●
NF metals	●
Steel	○

Advantages: Tear-resistant polyester backing - Long service life due to self-sharpening ceramic grit - Cool grinding due to additional multibond

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
125	60	○ 0	50	670083
125	80	○ 0	50	670082
125	100	○ 0	50	670081
125	120	○ 0	50	670080

NEW !

Strips / Sheets / Discs



Discs with cloth backing, self-fastening / Backing pads / Self-fastening support

► Continuation of CS 920 YK, Abrasive cloth, self-fastening

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
150	60	○ 0	50	670079
150	80	○ 0	50	670078
150	100	○ 0	50	670084
150	120	○ 0	50	670085

Backing pad for self-fastening discs

HST 359



Advantages: Good adhesion for all velour-coated abrasive discs - For medium-duty rough grinding and polishing

Diameter in mm	Thread/Shaft	Max. RPM	Packing unit/pcs.	Cat. number
115	thread M10	13300 rpm	1	70432
115	thread M14	13300 rpm	1	70433
115	8 mm	4000 rpm	1	6874
125	thread M14	12200 rpm	1	70434
125	8 mm	4000 rpm	1	70435
150	thread M14	10200 rpm	1	70436
180	thread M14	8500 rpm	1	73066

Self-fastening support

CS 396 Y



Properties

Engaging elements	Mushroom heads
Thickness	1,5 mm
Temperature range	-30° to +80°



Advantages: Can be cut to size easily - Simple and safe fixing on smooth and even surfaces - Allows a quick change of the abrasive

All sizes and minimum purchasing quantities available on request



Quick Change Discs

Coated abrasive	Type	Grain	Coating	Page
	<i>QMC/QRC 412</i>	Aluminium oxide	●	147, 151
	<i>QMC/QRC 411</i>	Zirconia alumina	●	148, 151
	<i>QMC/QRC 409</i>	Zirconia alumina	●	148, 152
	<i>QMC/QRC 910</i>	Ceramic aluminium oxide	●	149, 153

Minimum order quantities for made to order items


QCD	Diameter	Minimum order quantities
<i>QRC/QMC 412</i>	25 mm	1,700 pieces
<i>QRC/QMC 411</i>	38 mm	1,200 pieces
<i>QRC/QMC 409</i>	50 mm	900 pieces
<i>QRC/QMC 910</i>	76 mm	600 pieces



We reserve the right to over-deliver or under-deliver made to order items.

Quick Change Disc

QMC 412



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close

Applications:

Metals	●
NF metals	●

Advantages: For universal use in coarse and intermediate grinding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------


Diameter in mm	Grit	Max. RPM	Packing unit/pcs.	Cat. number
38	36	30000 rpm	100	295174
38	60	30000 rpm	100	295177
38	80	30000 rpm	100	295178
38	120	30000 rpm	100	295180
50	36	30000 rpm	100	295196
50	40	30000 rpm	100	295197
50	60	30000 rpm	100	295199
50	80	30000 rpm	100	295200
50	100	30000 rpm	100	295201
50	120	30000 rpm	100	295202
50	180	30000 rpm	100	295204
50	240	30000 rpm	100	295205
50	320	30000 rpm	100	295206
76	60	20000 rpm	50	295221
76	80	20000 rpm	50	295222
76	120	20000 rpm	50	295224
76	180	20000 rpm	50	295226

Backing pad see page 150 / Adapter see page 154.

Quick Change Discs

Quick Change Disc

QMC 411



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close

Applications:

Stainless steel	●
Metals	●

Advantages: Aggressive abrasive behavior due to self-sharpening zirconia alumina - High removal rate on steel and stainless steel

Available grits:



16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Max. RPM	Packing unit/pcs.	Cat. number
50	36	30000 rpm	100	295300
50	40	30000 rpm	100	295301
50	60	30000 rpm	100	295303
50	80	30000 rpm	100	295304
50	120	30000 rpm	100	295305
76	80	20000 rpm	50	295316

Backing pad see page 150 / Adapter see page 154.

Quick Change Disc

QMC 409

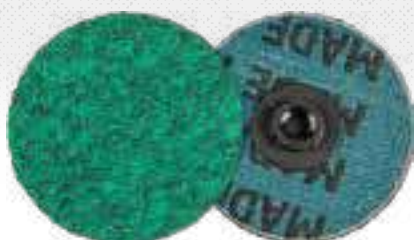

Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close

Applications:

Stainless steel	●
Metals	●

Advantages: High removal rate on stainless steel - Multibond allows cool grinding on stainless steel - Minimal clogging on aluminium

Available grits:


16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Max. RPM	Packing unit/pcs.	Cat. number
50	60	30000 rpm	100	295337
50	80	30000 rpm	100	295338
50	120	30000 rpm	100	295339

Backing pad see page 150 / Adapter see page 154.

Quick Change Disc

QMC 910



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close

Applications:

Stainless steel	●
High alloy steel	●

Advantages: Extremely high removal rate on stainless steel due to micro-crystalline and self-sharpening ceramic grit - Continuously aggressive abrasive properties - Multibond allows cool grinding on stainless steel

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Max. RPM	Packing unit/pcs.	Cat. number
38	60	30000 rpm	100	295359
38	80	30000 rpm	100	295360
50	36	30000 rpm	100	295366
50	40	30000 rpm	100	295367
50	60	30000 rpm	100	295369
50	80	30000 rpm	100	295370

Backing pad see page 150 / Adapter see page 154.

Backing pads

Backing pad

QMC 555





Advantages: For secure mounting of QMC discs - Optimized abrasive properties (aggressiveness, surface quality) due to three hardnesses - Easy differentiation of the hardnesses through coloured rings - Fixing spindle can be unscrewed, therefore the use on angle grinder or with adapter QCA 555 is possible via 1/4"-20 thread

Diameter in mm	Thread/Shaft	Density	Colour	Max. RPM	Packing unit/pcs.	Cat. number
25	Shaft 6 mm	medium	blue	30000 rpm	1	295422
38	Shaft 6 mm	soft	grey	30000 rpm	1	300058
38	Shaft 6 mm	medium	blue	30000 rpm	1	295424
38	Shaft 6 mm	firm	red	30000 rpm	1	300059
50	Shaft 6 mm	soft	grey	30000 rpm	1	300060
50	Shaft 6 mm	medium	blue	30000 rpm	1	295426
50	Shaft 6 mm	firm	red	30000 rpm	1	295427
76	Shaft 6 mm	soft	grey	20000 rpm	1	300061
76	Shaft 6 mm	medium	blue	20000 rpm	1	295430
76	Shaft 6 mm	firm	red	20000 rpm	1	295431

Quick Change Disc

QRC 412

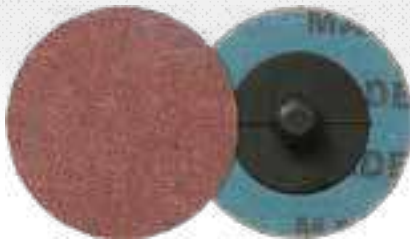

Properties

Bonding agent Resin	
Grain	Aluminium oxide
Coating	Close

Applications:

Metals	●
NF metals	●

Advantages: For universal use in coarse and intermediate grinding

Available grits:



16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Max. RPM	Packing unit/pcs.	Cat. number
50	36	30000 rpm	100	295207
50	40	30000 rpm	100	295208
50	60	30000 rpm	100	295210
50	80	30000 rpm	100	295211
50	120	30000 rpm	100	295213
76	36	20000 rpm	50	295229
76	60	20000 rpm	50	295232
76	80	20000 rpm	50	295233
76	120	20000 rpm	50	295235

Backing pad see page 154 / Adapter see page 154.

Quick Change Disc

QRC 411

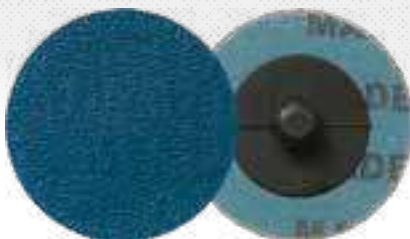

Properties

Bonding agent Resin	
Grain	Zirconia alumina
Coating	Close

Applications:

Stainless steel	●
Metals	●

Advantages: Aggressive abrasive behavior due to self-sharpening zirconia alumina - High removal rate on steel and stainless steel

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Max. RPM	Packing unit/pcs.	Cat. number
50	36	30000 rpm	100	295306
50	40	30000 rpm	100	295307
50	60	30000 rpm	100	295309
50	80	30000 rpm	100	295310



Quick Change Discs

Quick Roll Connect


►► Continuation of QRC 411, Quick Change Disc

Diameter in mm	Grit	Max. RPM	Packing unit/pcs.	Cat. number
50	120	30000 rpm	100	295311
76	36	20000 rpm	50	295318
76	60	20000 rpm	50	295321
76	80	20000 rpm	50	295322

Backing pad see page 154 / Adapter see page 154.

Quick Change Disc

QRC 409



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close

Applications:

Stainless steel	●
Metals	●



Advantages: High removal rate on stainless steel - Multibond allows cool grinding on stainless steel - Minimal clogging on aluminium

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Max. RPM	Packing unit/pcs.	Cat. number
50	36	30000 rpm	100	295340
50	60	30000 rpm	100	295343
50	80	30000 rpm	100	295344

Backing pad see page 154 / Adapter see page 154.


Quick Change Discs

Quick Roll Connect



Quick Change Disc

QRC 910



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close

Applications:

Stainless steel	●
High alloy steel	●

Advantages: Extremely high removal rate on stainless steel due to micro-crystalline and self-sharpening ceramic grit - Continuously aggressive abrasive properties - Multibond allows cool grinding on stainless steel

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Max. RPM	Packing unit/pcs.	Cat. number
50	40	30000 rpm	100	295372
50	60	30000 rpm	100	295374
50	80	30000 rpm	100	295375

Backing pad see page 154 / Adapter see page 154.

Backing pads / Adapter

Backing pad

QRC 555



Advantages: For secure mounting of QRC discs - Optimized abrasive properties (aggressiveness, surface quality) due to two hardnesses - Easy differentiation of the hardnesses through coloured rings - Fixing spindle can be unscrewed, therefore the use on angle grinder or with adapter QCA 555 is possible via 1/4"-20 thread

Diameter in mm	Thread/Shaft	Density	Colour	Max. RPM	Packing unit/pcs.	Cat. number
25	Shaft 6 mm	medium	blue	30000 rpm	1	295423
38	Shaft 6 mm	medium	blue	30000 rpm	1	295425
50	Shaft 6 mm	medium	blue	30000 rpm	1	295428
50	Shaft 6 mm	firm	red	30000 rpm	1	295429
76	Shaft 6 mm	medium	blue	20000 rpm	1	295432
76	Shaft 6 mm	firm	red	20000 rpm	1	295433

Adapter for quick change disc backing pad

QCA 555



Advantages: Quick Change Disc Adapter with M14 female thread and 1/4"-20 male thread - Allows use of quick change discs on a regular angle grinder

Width x Length in mm	Thread/Shaft	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
20 x 30	thread M14	80 m/s	75400 rpm	1	308693



A large rectangular area with a light gray dot grid pattern, intended for taking notes.

Abrasive mop wheels

Type	Page	Material applications															Machine applications							
		Metal	Apparatus / container engineering	Precision engineering	Mould making	Fittings	Pipes	Profiled sections	Tools	Mountings	Cutlery	Wood	Contoured wood	Model construction	Profiled sections	Paint / varnish / fillers	Plastics	Flexible shafts	Drilling machines	Die grinders	Automatic grinders	Floor stand grinders	Angle grinders	Satin finishing machine
<i>SM 611</i>	157	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		●	●	●		
<i>SM 611 W</i>	158	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		●	●	●		
<i>SM 611 H</i>	159	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		●	●	●		
<i>SM 611 S</i>	163	●	●				●																	●
<i>MM 630</i>	161	●	○		○		○	○				●	●	●	●	●	○	●	●	●				
<i>MM 650</i>	160	●	●	○	○	○	○	●		○		●	●	●	●	●	○	●		●		●		
<i>WSM 617</i>	162	●	●	●	●	●	●	●	●	●	●	○	○	●	●	●	●	○					●	
<i>FSR 618</i>	161	●	○	●	●	●	●	●	●	●	●	○	○	○	○	○	○	●			●	●		

● = main application ○ = possible application

Minimum order quantities for made to order items

Product	Diameter in mm	Minimum order quantities
<i>SM 611</i>	100–165	20 pieces
<i>SM 611 W/H/S *</i>	200–300	10 pieces
<i>WSM 617 *</i>	350–410	4 pieces

* Available dimensions on request

Product	Diameter in mm	Minimum order quantities
	165	20 pieces
<i>FSR 618</i>	200–300	10 pieces
	350–400	4 pieces
	100–165	20 pieces
<i>MM 650</i>	200–300	10 pieces
	>300	4 pieces



We reserve the right to over-deliver or under-deliver made to order items.


Abrasive mop wheels

Abrasive mop



Abrasive mop

SM 611



Properties

Bonding agent Resin	
Grain	Aluminium oxide

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	●
Metals	●

Advantages: Even surface scratch pattern due to continuously fresh, unused abrasive grit - For universal use on all materials - Adapts optimally to workpiece contour

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Width x Bore in mm	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
100 x 30 x 21	40	50 m/s	9500 rpm	5	12000
100 x 30 x 21	60	50 m/s	9500 rpm	5	12002
100 x 30 x 21	80	50 m/s	9500 rpm	5	12003
100 x 30 x 21	120	50 m/s	9500 rpm	5	12005
140 x 50 x 21	40	50 m/s	6800 rpm	3	12060
140 x 50 x 21	60	50 m/s	6800 rpm	3	12062
140 x 50 x 21	80	50 m/s	6800 rpm	3	12063
140 x 50 x 21	120	50 m/s	6800 rpm	3	12065
165 x 25 x 43,1	40	50 m/s	5800 rpm	5	12075
165 x 25 x 43,1	60	50 m/s	5800 rpm	5	12077
165 x 25 x 43,1	80	50 m/s	5800 rpm	5	12078
165 x 25 x 43,1	100	50 m/s	5800 rpm	5	12079
165 x 25 x 43,1	120	50 m/s	5800 rpm	5	12080
165 x 25 x 43,1	150	50 m/s	5800 rpm	5	12081
165 x 25 x 43,1	240	50 m/s	5800 rpm	5	12084
165 x 30 x 43,1	40	50 m/s	5800 rpm	5	12090
165 x 30 x 43,1	60	50 m/s	5800 rpm	5	12092
165 x 30 x 43,1	80	50 m/s	5800 rpm	5	12093
165 x 30 x 43,1	120	50 m/s	5800 rpm	5	12095
165 x 30 x 43,1	180	50 m/s	5800 rpm	5	12097
165 x 50 x 43,1	40	50 m/s	5800 rpm	3	12105
165 x 50 x 43,1	60	50 m/s	5800 rpm	3	12107
165 x 50 x 43,1	80	50 m/s	5800 rpm	3	12108
165 x 50 x 43,1	100	50 m/s	5800 rpm	3	12109
165 x 50 x 43,1	120	50 m/s	5800 rpm	3	12110
165 x 50 x 43,1	150	50 m/s	5800 rpm	3	12111
165 x 50 x 43,1	180	50 m/s	5800 rpm	3	12112
165 x 50 x 43,1	240	50 m/s	5800 rpm	3	12114
165 x 50 x 43,1	320	50 m/s	5800 rpm	3	12116
200 x 25 x 68,2	120	50 m/s	4800 rpm	5	12140
200 x 50 x 68,2	40	50 m/s	4800 rpm	3	12165
200 x 50 x 68,2	60	50 m/s	4800 rpm	3	12167
200 x 50 x 68,2	80	50 m/s	4800 rpm	3	12168
200 x 50 x 68,2	120	50 m/s	4800 rpm	3	12170



Abrasive mop wheels

Abrasive mop

►► Continuation of SM 611, Abrasive mop

Diameter x Width x Bore in mm	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
250 x 25 x 68,2	60	50 m/s	3800 rpm	2	12197
250 x 25 x 68,2	120	50 m/s	3800 rpm	2	12200
250 x 30 x 68,2	60	50 m/s	3800 rpm	2	12212
250 x 30 x 68,2	80	50 m/s	3800 rpm	2	12213
250 x 50 x 68,2	40	50 m/s	3800 rpm	1	12225
250 x 50 x 68,2	60	50 m/s	3800 rpm	1	12227
250 x 50 x 68,2	80	50 m/s	3800 rpm	1	12228
250 x 50 x 68,2	120	50 m/s	3800 rpm	1	12230
250 x 50 x 68,2	180	50 m/s	3800 rpm	1	12232
250 x 50 x 68,2	220	50 m/s	3800 rpm	1	12233
250 x 50 x 68,2	240	50 m/s	3800 rpm	1	12234
250 x 50 x 68,2	320	50 m/s	3800 rpm	1	12236
300 x 50 x 97,8	40	50 m/s	3200 rpm	1	12285
300 x 50 x 97,8	80	50 m/s	3200 rpm	1	12288
300 x 50 x 97,8	120	50 m/s	3200 rpm	1	12290
300 x 50 x 97,8	180	50 m/s	3200 rpm	1	12292
300 x 50 x 97,8	240	50 m/s	3200 rpm	1	12294
300 x 50 x 97,8	320	50 m/s	3200 rpm	1	12296

Use only with mounting plate SMD 612 (page 160)!

Abrasive mop

SM 611 W



Properties

Bonding agent	Resin
Grain	Aluminium oxide

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	●
Metals	●



Advantages: Even surface scratch pattern due to continuously fresh, unused abrasive grit - For universal use on all materials - Adapts optimally to workpiece contour - Can be used without mounting plate SMD 612

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
Diameter x Width x Bore in mm								Grit	Max. operating speed		Max. RPM		Packing unit/pcs.		Cat. number											
165 x 25 x 25,4								40	50 m/s		5800 rpm		5		221597											
165 x 25 x 25,4								60	50 m/s		5800 rpm		5		221596											
165 x 25 x 25,4								80	50 m/s		5800 rpm		5		221595											
165 x 25 x 25,4								120	50 m/s		5800 rpm		5		221593											
165 x 25 x 25,4								180	50 m/s		5800 rpm		5		221591											
165 x 50 x 25,4								40	50 m/s		5800 rpm		3		241156											


Abrasive mop wheels

Abrasive mop



Abrasive mop

SM 611 H



Properties

Bonding agent	Resin
Grain	Aluminium oxide

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	●
Metals	●



Advantages: Wooden core with mounting bore diameter of 13 mm for fast mounting - Can be used without mounting plate SMD 612 - Enlargement of the mounting bore is relatively uncomplicated

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Width x Bore in mm	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
165 x 25 x 13	40	50 m/s	5800 rpm	5	10030
165 x 25 x 13	60	50 m/s	5800 rpm	5	10005
165 x 25 x 13	80	50 m/s	5800 rpm	5	10004
165 x 25 x 13	120	50 m/s	5800 rpm	5	10006
165 x 25 x 13	240	50 m/s	5800 rpm	5	10027
165 x 50 x 13	40	50 m/s	5800 rpm	3	10022
165 x 50 x 13	60	50 m/s	5800 rpm	3	10017
165 x 50 x 13	80	50 m/s	5800 rpm	3	10018
165 x 50 x 13	120	50 m/s	5800 rpm	3	15990

Abrasive mop wheels

Abrasive mop

Abrasive mop

MM 650



Properties

Bonding agent	Resin
Grain	Aluminium oxide

Applications:

Paint/Varnish/Filler	●
Wood	●
Metals	●
Plastic	●



Advantages: Very suitable for workpieces with high profiles due to grinding flaps with longitudinal slots - Produces a very fine surface

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Width x Bore in mm	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
250 x 50 x 43,1	80	32 m/s	2450 rpm	2	2750
250 x 50 x 43,1	120	32 m/s	2450 rpm	2	2485
250 x 50 x 43,1	150	32 m/s	2450 rpm	2	2483
250 x 50 x 43,1	180	32 m/s	2450 rpm	2	2482
250 x 100 x 43,1	80	32 m/s	2450 rpm	1	10210
250 x 100 x 43,1	120	32 m/s	2450 rpm	1	2740
250 x 100 x 43,1	180	32 m/s	2450 rpm	1	2742

Use only with mounting plate SMD 612 (Cat. number 14823)!

Mounting plate

SMD 612



Advantages: Ensures a smooth running and the safe mounting on the machine

Diameter x Bore in mm	Suitable for	Max. enlargement of bore Ø in mm	Packing unit/pcs.	Cat. number
55 x 10	SM 611 (Ø100+Ø140)	Ø 20 mm	2	14821
79 x 12	SM 611/NCW/NFW 600 (Ø150+Ø165) + MM 650 (Ø250)	Ø 40 mm	2	14823
121 x 14	SM 611/NCW/NFW 600 (Ø200+Ø250)	Ø 50 mm	2	14824
155 x 20	SM 611 (Ø300)	Ø 50 mm	2	14826
195 x 25	SM 611 (Ø350)	Ø 80 mm	2	14827
221 x 25,4	SM 611 (Ø380+Ø410)	Ø 80 mm	2	14829


Abrasive mop wheels

Abrasive mop



Abrasive mop

MM 630



Properties

Bonding agent Resin	
Grain	Aluminium oxide

Applications:

Paint/Varnish/Filler	●
Wood	●
Metals	●
Plastic	ⓘ

Advantages: Very suitable for workpieces with high profiles due to grinding flaps with longitudinal slots - For use on hand operated machines - Fine surface pattern


Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Width x Shaft in mm	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
180 x 25 x 6	80	40 m/s	4200 rpm	2	262630
180 x 25 x 6	120	40 m/s	4200 rpm	2	262631
180 x 25 x 6	180	40 m/s	4200 rpm	2	262632
180 x 50 x 6	80	40 m/s	4200 rpm	2	262634
180 x 50 x 6	120	40 m/s	4200 rpm	2	262635
180 x 50 x 6	180	40 m/s	4200 rpm	2	262636

Pleated mop

FSR 618



Properties

Bonding agent Resin	
Grain	Aluminium oxide

Applications:

Metals	●
Wood	ⓘ
Paint/Varnish/Filler	ⓘ
Plastic	ⓘ

Advantages: Pleated mop wheel consisting of pleated aluminum oxide cloth flaps allows easy access to joints, grooves and slots - Very large immersion depth

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Bore in mm	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
165 x 14	40	50 m/s	5800 rpm	10	10187
165 x 14	60	50 m/s	5800 rpm	10	5830
165 x 14	80	50 m/s	5800 rpm	10	5831
165 x 14	120	50 m/s	5800 rpm	10	73994
165 x 14	150	50 m/s	5800 rpm	10	25998
165 x 14	220	50 m/s	5800 rpm	10	26033

Abrasive mop wheels

Abrasive mop

Angle grinder mop

WSM 617





Properties		Applications:	
Bonding agent	Resin	Steel	● Wood ●
Grain	Aluminium oxide	Stainless steel	●
		Paint	●
		Plastic	●

Advantages: Can be used on all standard angle grinders (80 m/s) - For universal use; in front and side position - Easy tool changing by hand without additional aids

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
Diameter x Width in mm				Grit	Thread/Shaft		Max. operating speed		Max. RPM		Packing unit/pcs.		Cat. number													
115 x 20				40	thread M14		80 m/s		13300 rpm		2		277014													
115 x 20				60	thread M14		80 m/s		13300 rpm		2		277015													
115 x 20				80	thread M14		80 m/s		13300 rpm		2		277016													
115 x 20				120	thread M14		80 m/s		13300 rpm		2		277017													
125 x 20				40	thread M14		80 m/s		12200 rpm		2		277018													
125 x 20				60	thread M14		80 m/s		12200 rpm		2		277019													
125 x 20				80	thread M14		80 m/s		12200 rpm		2		277020													
125 x 20				120	thread M14		80 m/s		12200 rpm		2		277021													



The all-round abrasive mop wheel for the angle grinder

- ▶ Quick and easy mounting
- ▶ Multi purpose
- ▶ Extremely safe
- ▶ Ideal for working on hard-to-reach places

Satin finishing drum

SM 611 S



Properties

Bonding agent	Resin
Grain	Aluminium oxide

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	●
Metals	●

Advantages: Even surface scratch pattern - Special product for fine surface finishing

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Width x Bore in mm	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
100 x 50 x 19	40	19 m/s	3700 rpm	3	60868
100 x 50 x 19	60	19 m/s	3700 rpm	3	60899
100 x 50 x 19	80	19 m/s	3700 rpm	3	60943
100 x 50 x 19	120	19 m/s	3700 rpm	3	61045
100 x 100 x 19	40	19 m/s	3700 rpm	1	83167
100 x 100 x 19	60	19 m/s	3700 rpm	1	7325
100 x 100 x 19	80	19 m/s	3700 rpm	1	7326
100 x 100 x 19	120	19 m/s	3700 rpm	1	93076
100 x 100 x 19	180	19 m/s	3700 rpm	1	93021
100 x 100 x 19	240	19 m/s	3700 rpm	1	104999

Small abrasive mops

	Material applications															Machine applications	
	Metal	Apparatus / container engineering	Precision engineering	Mould making	Fittings	Pipes	Profiled sections	Tools	Mountings	Wood	Contoured wood	Model construction	Profiled sections	Plastics	Flexible shafts	Drilling machines	Die grinders
Type																	
KM 613	●	●	●	●	●	●	●	●	●	○	○	○	○	○	●	●	●
KM 615	●	●	●	●	●	●	●	●	●			○	○		●	●	●
KMT 614	●	●	●	●	●	●	●	●	●	○	○	○	○	○	●	●	●
● = main application ○ = possible application																	

Minimum order quantities for made to order items

Product	Grit	Minimum order quantities
KM 613	40–320	250 pieces
	from 360	500 pieces
KM 615	40–180	250 pieces
	40–320	250 pieces
KMT 614	40–320	250 pieces
	from 360	500 pieces


Small abrasive mop

Abrasive mop



Small abrasive mop

KM 613



Properties

Bonding agent	Resin
Grain	Aluminium oxide

Applications:

Stainless steel	●
Metals	●
Wood	⦿
Plastic	⦿



Advantages: Universal product for steel and stainless steel materials - Even removal rate - Suitable for use in hard-to-reach areas

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Width x Shaft in mm	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
10 x 10 x 3	40	40 m/s	76300 rpm	10	327992
10 x 10 x 3	60	40 m/s	76300 rpm	10	327993
10 x 10 x 3	80	40 m/s	76300 rpm	10	327994
10 x 10 x 3	120	40 m/s	76300 rpm	10	327995
10 x 10 x 3	180	40 m/s	76300 rpm	10	327997
10 x 10 x 3	240	40 m/s	76300 rpm	10	327998
10 x 10 x 3	320	40 m/s	76300 rpm	10	327999
20 x 10 x 3	60	40 m/s	38150 rpm	25	325948
20 x 10 x 3	80	40 m/s	38150 rpm	25	305324
20 x 10 x 3	120	40 m/s	38150 rpm	25	307342
20 x 10 x 3	240	40 m/s	38150 rpm	25	307343
20 x 10 x 3	320	40 m/s	38150 rpm	25	307344
20 x 10 x 6	40	40 m/s	38150 rpm	25	284729
20 x 10 x 6	60	40 m/s	38150 rpm	25	284730
20 x 10 x 6	80	40 m/s	38150 rpm	25	284731
20 x 10 x 6	120	40 m/s	38150 rpm	25	284732
20 x 10 x 6	180	40 m/s	38150 rpm	25	284733
20 x 10 x 6	240	40 m/s	38150 rpm	25	284734
20 x 10 x 6	320	40 m/s	38150 rpm	25	284735
20 x 15 x 6	40	40 m/s	38150 rpm	25	284736
20 x 15 x 6	60	40 m/s	38150 rpm	25	284737
20 x 15 x 6	80	40 m/s	38150 rpm	25	284738
20 x 15 x 6	120	40 m/s	38150 rpm	25	284739
20 x 15 x 6	180	40 m/s	38150 rpm	25	284740
20 x 15 x 6	240	40 m/s	38150 rpm	25	284741
20 x 20 x 6	40	40 m/s	38150 rpm	25	284743
20 x 20 x 6	60	40 m/s	38150 rpm	25	284744
20 x 20 x 6	80	40 m/s	38150 rpm	25	284745
20 x 20 x 6	120	40 m/s	38150 rpm	25	284746
20 x 20 x 6	180	40 m/s	38150 rpm	25	284747
20 x 20 x 6	240	40 m/s	38150 rpm	25	284748
20 x 20 x 6	320	40 m/s	38150 rpm	25	284749
25 x 10 x 6	40	40 m/s	30500 rpm	10	253816
25 x 10 x 6	60	40 m/s	30500 rpm	10	253591



Small abrasive mop

Abrasive mop

►► Continuation of KM 613, Small abrasive mop

Diameter x Width x Shaft in mm	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
25 x 10 x 6	80	40 m/s	30500 rpm	10	253592
25 x 10 x 6	120	40 m/s	30500 rpm	10	253593
25 x 15 x 6	40	40 m/s	30500 rpm	10	253817
25 x 15 x 6	60	40 m/s	30500 rpm	10	250985
25 x 15 x 6	80	40 m/s	30500 rpm	10	237496
25 x 15 x 6	120	40 m/s	30500 rpm	10	253606
25 x 15 x 6	150	40 m/s	30500 rpm	10	253607
25 x 15 x 6	240	40 m/s	30500 rpm	10	253608
30 x 5 x 3	60	40 m/s	25400 rpm	10	12781
30 x 5 x 3	80	40 m/s	25400 rpm	10	12782
30 x 5 x 3	120	40 m/s	25400 rpm	10	12784
30 x 5 x 6	60	40 m/s	25400 rpm	10	12790
30 x 5 x 6	80	40 m/s	25400 rpm	10	12791
30 x 5 x 6	120	40 m/s	25400 rpm	10	12793
30 x 5 x 6	150	40 m/s	25400 rpm	10	12794
30 x 5 x 6	240	40 m/s	25400 rpm	10	12796
30 x 10 x 3	60	40 m/s	25400 rpm	10	12808
30 x 10 x 3	80	40 m/s	25400 rpm	10	12809
30 x 10 x 3	120	40 m/s	25400 rpm	10	12811
30 x 10 x 3	240	40 m/s	25400 rpm	10	12814
30 x 10 x 6	40	40 m/s	25400 rpm	10	12816
30 x 10 x 6	60	40 m/s	25400 rpm	10	12817
30 x 10 x 6	80	40 m/s	25400 rpm	10	12818
30 x 10 x 6	100	40 m/s	25400 rpm	10	12819
30 x 10 x 6	120	40 m/s	25400 rpm	10	12820
30 x 10 x 6	150	40 m/s	25400 rpm	10	12821
30 x 10 x 6	180	40 m/s	25400 rpm	10	12822
30 x 10 x 6	240	40 m/s	25400 rpm	10	12823
30 x 10 x 6	320	40 m/s	25400 rpm	10	12824
30 x 15 x 6	40	40 m/s	25400 rpm	10	12843
30 x 15 x 6	60	40 m/s	25400 rpm	10	12844
30 x 15 x 6	80	40 m/s	25400 rpm	10	12845
30 x 15 x 6	100	40 m/s	25400 rpm	10	12846
30 x 15 x 6	120	40 m/s	25400 rpm	10	12847
30 x 15 x 6	150	40 m/s	25400 rpm	10	12848
30 x 15 x 6	180	40 m/s	25400 rpm	10	12849
30 x 15 x 6	240	40 m/s	25400 rpm	10	12850
30 x 15 x 6	320	40 m/s	25400 rpm	10	12851
40 x 10 x 6	40	40 m/s	19000 rpm	10	12870
40 x 10 x 6	60	40 m/s	19000 rpm	10	12871
40 x 10 x 6	80	40 m/s	19000 rpm	10	12872
40 x 10 x 6	120	40 m/s	19000 rpm	10	12874
40 x 15 x 6	40	40 m/s	19000 rpm	10	12906
40 x 15 x 6	60	40 m/s	19000 rpm	10	12907
40 x 15 x 6	80	40 m/s	19000 rpm	10	12908
40 x 15 x 6	100	40 m/s	19000 rpm	10	12909
40 x 15 x 6	120	40 m/s	19000 rpm	10	12910
40 x 15 x 6	150	40 m/s	19000 rpm	10	12911
40 x 15 x 6	180	40 m/s	19000 rpm	10	12912
40 x 15 x 6	240	40 m/s	19000 rpm	10	12913
40 x 15 x 6	320	40 m/s	19000 rpm	10	12914



Small abrasive mop

Abrasive mop



►► Continuation of KM 613, Small abrasive mop

Diameter x Width x Shaft in mm	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
40 x 20 x 6	40	40 m/s	19000 rpm	10	12942
40 x 20 x 6	60	40 m/s	19000 rpm	10	12943
40 x 20 x 6	80	40 m/s	19000 rpm	10	12944
40 x 20 x 6	100	40 m/s	19000 rpm	10	12945
40 x 20 x 6	120	40 m/s	19000 rpm	10	12946
40 x 20 x 6	150	40 m/s	19000 rpm	10	12947
40 x 20 x 6	180	40 m/s	19000 rpm	10	12948
40 x 20 x 6	240	40 m/s	19000 rpm	10	12949
40 x 20 x 6	320	40 m/s	19000 rpm	10	12950
50 x 5 x 6	60	40 m/s	15200 rpm	10	135235
50 x 5 x 6	80	40 m/s	15200 rpm	10	136451
50 x 5 x 6	120	40 m/s	15200 rpm	10	251778
50 x 10 x 6	40	40 m/s	15200 rpm	10	12960
50 x 10 x 6	60	40 m/s	15200 rpm	10	12961
50 x 10 x 6	80	40 m/s	15200 rpm	10	12962
50 x 10 x 6	120	40 m/s	15200 rpm	10	12964
50 x 10 x 6	150	40 m/s	15200 rpm	10	12965
50 x 10 x 6	240	40 m/s	15200 rpm	10	12967
50 x 15 x 6	40	40 m/s	15200 rpm	10	12978
50 x 15 x 6	60	40 m/s	15200 rpm	10	12979
50 x 15 x 6	80	40 m/s	15200 rpm	10	12980
50 x 15 x 6	120	40 m/s	15200 rpm	10	12982
50 x 20 x 6	40	40 m/s	15200 rpm	10	12996
50 x 20 x 6	60	40 m/s	15200 rpm	10	12997
50 x 20 x 6	80	40 m/s	15200 rpm	10	12998
50 x 20 x 6	100	40 m/s	15200 rpm	10	12999
50 x 20 x 6	120	40 m/s	15200 rpm	10	13000
50 x 20 x 6	150	40 m/s	15200 rpm	10	13001
50 x 20 x 6	180	40 m/s	15200 rpm	10	13002
50 x 20 x 6	240	40 m/s	15200 rpm	10	13003
50 x 20 x 6	320	40 m/s	15200 rpm	10	13004
50 x 30 x 6	40	40 m/s	15200 rpm	10	61282
50 x 30 x 6	60	40 m/s	15200 rpm	10	61299
50 x 30 x 6	80	40 m/s	15200 rpm	10	61319
50 x 30 x 6	100	40 m/s	15200 rpm	10	61333
50 x 30 x 6	120	40 m/s	15200 rpm	10	61350
50 x 30 x 6	150	40 m/s	15200 rpm	10	71015
50 x 30 x 6	180	40 m/s	15200 rpm	10	61371
50 x 30 x 6	240	40 m/s	15200 rpm	10	71017
50 x 30 x 6	320	40 m/s	15200 rpm	10	61389
60 x 15 x 6	40	40 m/s	12700 rpm	10	13014
60 x 15 x 6	60	40 m/s	12700 rpm	10	13015
60 x 15 x 6	80	40 m/s	12700 rpm	10	13016
60 x 15 x 6	120	40 m/s	12700 rpm	10	13018
60 x 15 x 6	150	40 m/s	12700 rpm	10	13019
60 x 15 x 6	240	40 m/s	12700 rpm	10	13021
60 x 20 x 6	40	40 m/s	12700 rpm	10	13032
60 x 20 x 6	60	40 m/s	12700 rpm	10	13033
60 x 20 x 6	80	40 m/s	12700 rpm	10	13034
60 x 20 x 6	120	40 m/s	12700 rpm	10	13036
60 x 20 x 6	180	40 m/s	12700 rpm	10	13038



Small abrasive mop

Abrasive mop

►► Continuation of KM 613, Small abrasive mop

Diameter x Width x Shaft in mm	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
60 x 20 x 6	240	40 m/s	12700 rpm	10	13039
60 x 30 x 6	40	40 m/s	12700 rpm	10	13050
60 x 30 x 6	60	40 m/s	12700 rpm	10	13051
60 x 30 x 6	80	40 m/s	12700 rpm	10	13052
60 x 30 x 6	100	40 m/s	12700 rpm	10	13053
60 x 30 x 6	120	40 m/s	12700 rpm	10	13054
60 x 30 x 6	150	40 m/s	12700 rpm	10	13055
60 x 30 x 6	180	40 m/s	12700 rpm	10	13056
60 x 30 x 6	240	40 m/s	12700 rpm	10	13057
60 x 30 x 6	320	40 m/s	12700 rpm	10	13058
60 x 40 x 6	40	40 m/s	12700 rpm	10	13068
60 x 40 x 6	60	40 m/s	12700 rpm	10	13069
60 x 40 x 6	80	40 m/s	12700 rpm	10	13070
60 x 40 x 6	100	40 m/s	12700 rpm	10	13071
60 x 40 x 6	120	40 m/s	12700 rpm	10	13072
60 x 40 x 6	150	40 m/s	12700 rpm	10	13073
60 x 40 x 6	240	40 m/s	12700 rpm	10	13075
60 x 50 x 6	40	32 m/s	10150 rpm	10	13086
60 x 50 x 6	60	32 m/s	10150 rpm	10	13087
60 x 50 x 6	80	32 m/s	10150 rpm	10	13088
60 x 50 x 6	120	32 m/s	10150 rpm	10	13090
60 x 50 x 6	180	32 m/s	10150 rpm	10	13092
80 x 15 x 6	40	40 m/s	9500 rpm	10	13104
80 x 15 x 6	60	40 m/s	9500 rpm	10	13105
80 x 15 x 6	80	40 m/s	9500 rpm	10	13106
80 x 15 x 6	120	40 m/s	9500 rpm	10	13108
80 x 15 x 6	150	40 m/s	9500 rpm	10	13109
80 x 15 x 6	240	40 m/s	9500 rpm	10	13111
80 x 20 x 6	40	40 m/s	9500 rpm	10	13122
80 x 20 x 6	60	40 m/s	9500 rpm	10	13123
80 x 20 x 6	80	40 m/s	9500 rpm	10	13124
80 x 20 x 6	120	40 m/s	9500 rpm	10	13126
80 x 30 x 6	40	40 m/s	9500 rpm	10	13140
80 x 30 x 6	60	40 m/s	9500 rpm	10	13141
80 x 30 x 6	80	40 m/s	9500 rpm	10	13142
80 x 30 x 6	120	40 m/s	9500 rpm	10	13144
80 x 30 x 6	150	40 m/s	9500 rpm	10	13145
80 x 30 x 6	240	40 m/s	9500 rpm	10	13147
80 x 30 x 6	320	40 m/s	9500 rpm	10	13148
80 x 40 x 6	40	40 m/s	9500 rpm	10	13158
80 x 40 x 6	60	40 m/s	9500 rpm	10	13159
80 x 40 x 6	80	40 m/s	9500 rpm	10	13160
80 x 40 x 6	120	40 m/s	9500 rpm	10	13162
80 x 50 x 6	40	32 m/s	7650 rpm	10	13176
80 x 50 x 6	60	32 m/s	7650 rpm	10	13177
80 x 50 x 6	80	32 m/s	7650 rpm	10	13178
80 x 50 x 6	100	32 m/s	7650 rpm	10	13179
80 x 50 x 6	120	32 m/s	7650 rpm	10	13180
80 x 50 x 6	150	32 m/s	7650 rpm	10	13181
80 x 50 x 6	240	32 m/s	7650 rpm	10	13183
80 x 50 x 6	320	32 m/s	7650 rpm	10	13184


Small abrasive mop

Abrasive mop



Small abrasive mop

KM 615



Properties

Bonding agent Resin	
Grain	Aluminium oxide

Applications:

Stainless steel	●
-----------------	---

Advantages: Cool grinding due to multibond - Increased removal rate on stainless steel


Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Width x Shaft in mm	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
30 x 10 x 6	60	40 m/s	25400 rpm	10	253615
30 x 10 x 6	80	40 m/s	25400 rpm	10	253620
30 x 10 x 6	120	40 m/s	25400 rpm	10	253610
40 x 20 x 6	60	40 m/s	19000 rpm	10	253616
40 x 20 x 6	80	40 m/s	19000 rpm	10	253621
40 x 20 x 6	120	40 m/s	19000 rpm	10	253611
50 x 20 x 6	60	40 m/s	15200 rpm	10	253617
60 x 30 x 6	60	40 m/s	12700 rpm	10	253618
60 x 30 x 6	80	40 m/s	12700 rpm	10	253623
80 x 40 x 6	60	40 m/s	9500 rpm	10	253619
80 x 40 x 6	80	40 m/s	9500 rpm	10	253624

Small abrasive mop, cup-shaped

KMT 614



Properties

Bonding agent Resin	
Grain	Aluminium oxide

Applications:

Metals	●
Wood	○
Plastic	○

Advantages: Can be used in radial and front position

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Width x Shaft in mm	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
60 x 40 x 6	40	40 m/s	12700 rpm	10	13194
60 x 40 x 6	60	40 m/s	12700 rpm	10	13195

Non-woven products

			Machines												Material applications							
Work step	Type	Tool type	Angle grinderr	Drilling machine	Die grinder	Flexible shaft grinder	Back stand grinding machine	Hand tool belt grinder	Right angle die grinder	Orbital sander	Satin finishing machine	Floor standing grinder	Random orbital sander	Fillet weld grinder	Hand sanding	Stainless steel	Steel	NF metals	Varnish	Plastic	Wood	Page
Light sanding and creating satin finishes	SMT 850 plus	Combi-abrasive mop disc	●													●	●					189
	SMT 800	Non-woven mop disc	●													●	●	●				189
	SV 484	SCM non-woven web disc (universal)	●													●	●	●	●			177
	NDS 800	SCM non-woven web disc (hard, edge)	●													●	●	●	●			178
	NBS 800	SCM non-woven web belt					●									●	●	●				175
	NBF 800	SCM non-woven file belt						●								●	●	●				174
	QMC/QRC 800	SCM Quick Change Disc							●							●	●	●				180,182
Coarse cleaning, removal of coatings	PW 2000	Power wheel		●	●	●										●	●	●	●			193
	NCD 200	Coarse cleaning disc	●													●	●	●	●			192
	NCD 200 HD	Coarse cleaning disc HD	●													●	●	●	●			193
	QRC 200 HD	Coarse cleaning QCD							●							●	●	●	●			183
Finishing and creating matt finishes	NRO 400	Non-woven web roll, aluminium oxide								●					●	●	●	●	●	●	●	172
	NRO 500	Non-woven web roll, SiC								●					●	●	●	●	●	●	●	173
	NPA 400	Non-woven hand pad, aluminium oxide								●					●	●	●	●	●	●	●	173
	NPA 500	Non-woven hand pad, SiC								●					●	●	●	●	●	●	●	174
	NFW 600 S	Non-woven finishing wheel									●					●	●	●		●		186
	NCW 600 S	Non-woven combi finishing wheel									●					●	●	●		●		186
	NFW 600	Non-woven finishing wheel										●				●	●	●		●		185
	NCW 600	Non-woven combi finishing wheel										●				●	●	●		●		185
	NDS 400 K	Non-woven self-adhesive disc											●			●	●	●	●	●	●	176
	QMC/QRC 400	Non-woven QCD							●							●	●	●	●	●	●	180,182
	NFS 600	Non-woven mounted wheel		●	●	●										●	●	●		●		188
NCS 600	Combi non-woven mounted wheel		●	●	●										●	●	●		●		187	
Removal of heat tinting, pre-polishing	NUD 500	Unitised compact disc	●													●	●	●				190
	MFW 600	Unitised compact disc / wheel	●											●		●	●	●				190
	QRC 500	Unitised compact QCD							●							●	●	●				183
	NCO 700 DB	Non-woven convolute wheel										●				●	●	●		●		191
	NCO 710 DB	Non-woven convolute wheel										●				●	●	●		●		191

● = main application ○ = possible application

Minimum order quantities for made to order items

Format/style	Product	Width / Diameter	Minimum order quantity
Rolls	NRO 400 / 500	Dimensions and quantities on request	
Sheets	NPA 400 / 500	Dimensions and quantities on request	
Belts	NBF 800	6 – 13 mm	20 pieces
		14 – 30 mm	10 pieces
	NBS 800	31 – 75 mm	5 pieces
		76 – 320 mm	2 pieces
Quick Change Discs	QRC/QMC 800	Ø 38 mm	400 pieces
		Ø 50 mm	350 pieces
		Ø 76 mm	350 pieces
	QRC/QMC 400	Ø 38 mm	700 pieces
		Ø 50 mm	500 pieces
		Ø 76 mm	375 pieces
Abrasive mop wheels/ Abrasive mop rollers	NFW 600 / NCW 600	Ø 100 – 165 mm	20 pieces
		Ø 200 – 300 mm	10 pieces
	NFW 600 S/ NCW 600 S	Ø 100 – 110 mm	20 pieces
Small abrasive mop	NCS 600 / NFS 600	Ø 30, 40, 50, 60 mm	150 pieces
		Ø 80, 100 mm	100 pieces
	MFW 600	Ø 125 + Ø 150 mm	250 pieces
Non-woven compact wheels	NCO 700 / NCO 710	Ø 152,4 + Ø 203,2 mm	10 pieces
		Ø 250 mm + Ø 300 mm	20 pieces



The minimum length for non-woven belts is 270 mm.

We reserve the right to over-deliver or under-deliver production items.

Non-woven web

Rolls

Non-woven web roll, waterproof

NRO 400



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Non-woven material type	Soft non-woven material

Applications:

Stainless steel	●	Paint/Varnish/Filler	①
Metals	●		
Wood	●		
Plastic	①		

Advantages: Very good adaptation to surface contours - No clogging - Ideal for smoothing, cleaning, roughening and for general surface finishing - Can be used wet and dry

Width x Length in mm	Colour	Grade	Packing unit/pcs.	Cat. number
100 x 10000	maroon	medium	1	258870
100 x 10000	maroon	fine	1	258872
100 x 10000	dark green	very fine general purpose	1	258871
100 x 10000	maroon	very fine	1	258873
115 x 10000	maroon	coarse	1	271086
115 x 10000	maroon	medium	1	258885
115 x 10000	maroon	fine	1	258887
115 x 10000	dark green	very fine general purpose	1	258886
115 x 10000	maroon	very fine	1	258888
150 x 10000	maroon	medium	1	258890
150 x 10000	maroon	fine	1	258892
150 x 10000	dark green	very fine general purpose	1	258891
150 x 10000	maroon	very fine	1	258893

Non-woven web

Rolls / Pads



Non-woven web roll, waterproof

NRO 500



Properties

Bonding agent	Resin
Grain	SiC
Non-woven material type	Soft non-woven material

Applications:

Stainless steel	●	Wood	⓪
Plastic	●		
Paint/Varnish/Filler	●		
Metals	⓪		

Advantages: Very good adaptation to surface contours - No clogging - Ideal for smoothing, cleaning, roughening and for general surface finishing - Can be used wet and dry

Width x Length in mm	Colour	Grade	Packing unit/pcs.	Cat. number
100 x 10000	black	medium	1	260365
100 x 10000	grey	ultra fine	1	258874
115 x 10000	black	medium	1	260366
115 x 10000	grey	ultra fine	1	258889
150 x 10000	black	medium	1	260367
150 x 10000	grey	ultra fine	1	258894

Non-woven web hand pad, waterproof

NPA 400



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Non-woven material type	Soft non-woven material

Applications:

Stainless steel	●	Plastic	⓪
Metals	●		
Wood	●		
Paint/Varnish	⓪		

Advantages: Outstanding for surface finishing, e.g. adaptation to an existing surface scratch pattern - Can be used wet and dry

Width x Length in mm	Colour	Grade	Packing unit/pcs.	Cat. number
152 x 229	brown	coarse	20	342852
152 x 229	maroon	medium	20	342855
152 x 229	maroon	fine	20	342856
152 x 229	maroon	very fine	20	342849
152 x 229	green	very fine heavy duty	20	342853
152 x 229	dark green	very fine general purpose	20	342854

Non-woven web

Pads / Belts

Non-woven web hand pad, waterproof

NPA 500



Properties

Bonding agent	Resin
Grain	SiC
Non-woven material type	Soft non-woven material

Applications:

Paint/Varnish	●
Plastic	●
Stainless steel	●
Metals	⦿

Wood	⦿
------	---

Advantages: Outstanding for surface finishing, e.g. adaptation to an existing surface scratch pattern - Can be used wet and dry

Width x Length in mm	Colour	Grade	Packing unit/pcs.	Cat. number
152 x 229	black	medium	20	342857
152 x 229	grey	ultra fine	20	342851
152 x 229	white	without grain	20	342850

SCM file belt

NBF 800



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Non-woven material type	Non-woven material with fabric lining

Applications:

Stainless steel	●
NF metals	●
Metals	⦿

Advantages: Special product for surface finishing with hand tool belt grinders - Ideal for removal of discolorations, for light deburring, leveling, matt finishing and roughening - Minimal clogging and long service life - Suitable for dry and wet grinding

Width x Length in mm	Belt joint	Colour	Grade	Packing unit/pcs.	Cat. number
6 x 520	F4W	brown	coarse	10	258646
6 x 520	F4W	maroon	medium	10	258647
6 x 520	F4W	blue	very fine	10	258648
6 x 610	F4W	brown	coarse	10	380449
6 x 610	F4W	maroon	medium	10	380448
6 x 610	F4W	blue	very fine	10	343154
9 x 533	F4W	brown	coarse	10	258652
9 x 533	F4W	maroon	medium	10	258653
9 x 533	F4W	blue	very fine	10	258654
10 x 330	F4W	brown	coarse	10	258655
10 x 330	F4W	maroon	medium	10	258656
10 x 330	F4W	blue	very fine	10	258657
12 x 520	F4W	brown	coarse	10	258658
12 x 520	F4W	maroon	medium	10	258659




►► Continuation of NBF 800, SCM File belt

Width x Length in mm	Belt joint	Colour	Grade	Packing unit/pcs.	Cat. number
12 x 520	F4W	blue	very fine	10	258660
12 x 533	F4W	maroon	medium	10	258662
13 x 457	F4W	brown	coarse	10	258664
13 x 457	F4W	maroon	medium	10	258665
13 x 457	F4W	blue	very fine	10	258666
13 x 610	F4W	brown	coarse	10	258667
13 x 610	F4W	maroon	medium	10	258668
13 x 610	F4W	blue	very fine	10	258669
20 x 520	F4W	brown	coarse	10	258671
20 x 520	F4W	maroon	medium	10	258672
20 x 520	F4W	blue	very fine	10	258673
28 x 533	F4W	maroon	medium	10	258695
28 x 533	F4W	blue	very fine	10	258696
30 x 533	F4W	brown	coarse	5	258699
30 x 533	F4W	maroon	medium	5	258700
30 x 533	F4W	blue	very fine	5	258701
30 x 610	F4W	maroon	medium	5	258703

SCM standard belt

NBS 800



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Non-woven material type	Non-woven material with fabric lining

Applications:

Stainless steel	●
NF metals	●
Metals	⓪

Advantages: Special product for surface finishing with hand-operated machines (except hand tool belt grinders) and stationary machines - Ideal for removal of discolorations, for light deburring, leveling, matte finishing and roughening - Minimal clogging - Long service life - Suitable for dry and wet grinding

Width x Length in mm	Belt joint	Colour	Grade	Packing unit/pcs.	Cat. number
30 x 800	F3W	violet	medium	5	258706
40 x 618	F3W	grey	coarse	5	258711
40 x 618	F3W	violet	medium	5	258712
40 x 618	F3W	blue	very fine	5	258713
40 x 760	F3W	grey	coarse	5	659528
40 x 760	F3W	violet	medium	5	659535
40 x 760	F3W	green	fine	5	372093
40 x 820	F3W	grey	coarse	5	258714
40 x 820	F3W	violet	medium	5	258715
40 x 820	F3W	blue	very fine	5	258716
50 x 450	F3W	grey	coarse	5	258717
50 x 450	F3W	violet	medium	5	258718
50 x 2000	F3W	grey	coarse	5	354643
50 x 2000	F3W	violet	medium	5	338943
50 x 2000	F3W	blue	very fine	5	354644



Non-woven web

Belts / Discs

►► Continuation of NBS 800, SCM standard belt

Width x Length in mm	Belt joint	Colour	Grade	Packing unit/pcs.	Cat. number
75 x 2000	F3W	grey	coarse	5	258729
75 x 2000	F3W	violet	medium	5	258730
75 x 2000	F3W	blue	very fine	5	258731
90 x 395	F3W	grey	coarse	5	383427
90 x 395	F3W	violet	medium	5	336813
90 x 395	F3W	blue	very fine	5	336812
100 x 283	F3W	grey	coarse	5	335576
100 x 283	F3W	violet	medium	5	383428
100 x 283	F3W	blue	very fine	5	335579
150 x 2000	F3W	grey	coarse	5	380337
150 x 2000	F3W	violet	medium	5	380334
150 x 2000	F3W	blue	very fine	5	380357

Non-woven web disc, self-fastening

NDS 400 K



Properties

Bonding agent	Resin
Grain	Aluminium oxide/SiC
Non-woven material type	Soft non-woven material + velour backing

Applications:

Metals	●	Paint/Varnish/Filler	●
Steel	●		
Stainless steel	●		
Plastic	●		


Advantages: Creates an omnidirectional, ultra-fine satin finish on stainless steel surfaces - Effortless cleaning of metal surfaces - Removal of thin layers of oxidation on NF metal - Preparation of surfaces for subsequent coating - Roughening of painted and plastic surfaces - Available in ultra fine (SiC) and very fine (Aluminium oxide)

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
Diameter in mm				Grit		Colour		Grade				Packing unit/pcs.				Cat. number										
150				320		maroon		very fine				20				342640										
150				600		grey		ultra fine				20				342641										

SCM disc, waterproof

SV 484

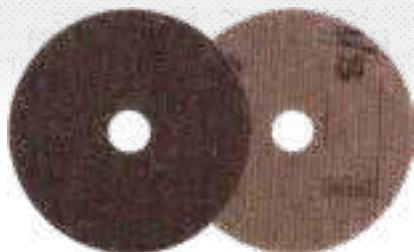

Properties

Bonding agent	Resin
Grain	Aluminium oxide
Non-woven material type	Non-woven material with fabric lining

Applications:

Paint/Varnish/Filler	●	Stainless steel	●
Wood	●		
Plastic	●		
Metals	●		

Advantages: Universal non-woven web disc with outstanding price-performance ratio - Soft and elastic grinding - Can be used wet and dry - With center hole for easy mounting, secure hold and smooth running on backing plates with centering - Also suited for backing pads without centering and fiber discs backing plates with clamping screw

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Bore in mm	Grit	Grade	Packing unit/pcs.	Cat. number
115 x 22	80	coarse	10	353413
115 x 22	100	medium	10	353415
115 x 22	180	medium	10	353409
115 x 22	280	very fine	10	353410
125 x 22	80	coarse	10	353414
125 x 22	100	medium	10	353416
125 x 22	180	medium	10	353411
125 x 22	280	very fine	10	353412

Non-woven web

Discs / Backing pads

SCM disc, waterproof

NDS 800



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Non-woven material type	Non-woven material with fabric lining

Applications:

Metals	●	Wood	●
Stainless steel	●		
Paint/Varnish/Filler	●		
Plastic	●		

Advantages: High edge stability - Aggressive abrasive behaviour - Long service life - Can be used for wet and dry grinding - With expressible center hole for easy mounting, secure hold and smooth running on backing plates with centering - Also suited for backing pads without centering and fiber discs backing plates with clamping screw

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Bore in mm	Grit	Colour	Grade	Packing unit/pcs.	Cat. number
115 x 22	50	brown	coarse	10	320103
115 x 22	100	maroon	medium	10	320104
115 x 22	180	blue	very fine	10	320105
125 x 22	50	brown	coarse	10	320106
125 x 22	100	maroon	medium	10	320107
125 x 22	180	blue	very fine	10	320108

Self-fastening backing pad for SCM discs

NDS 555



Advantages: Good adhesion for non-woven web discs - For medium-duty grinding and polishing

Diameter in mm	Thread/Shaft	Max. RPM	Packing unit/pcs.	Cat. number
115	thread M14	13300 rpm	1	164100
125	thread M14	12200 rpm	1	208275

Self-fastening backing pad for SCM discs
with center hole

NDS 555 C



Advantages: Easy and always centric positioning of the non-woven web discs - Good adhesion due to special self-fastening hooks - Less vibrations, stable running - No loosening of the discs, even with decreasing adhesion - Adaptable, for surfaces and light contours



Diameter in mm	Thread/Shaft	Suitable for	Max. RPM	Packing unit/pcs.	Cat. number
115	thread M14	Diameter 115 x 22	13300 rpm	1	358126
125	thread M14	Diameter 125 x 22	12200 rpm	1	358127

Non-woven web

Quick Change Discs

Non-woven web quick change disc

QMC 400

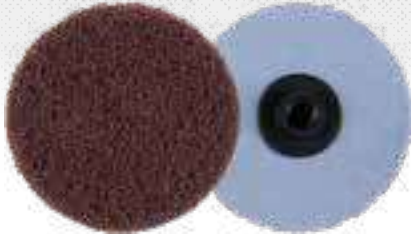

Properties

Bonding agent	Resin
Grain	Aluminium oxide
Non-woven material type	Soft non-woven material

Applications:

Paint/Varnish/Filler	●
Stainless steel	●
Metals	○


Advantages: Suitable for surface finishing work - For cleaning work on metals and painted surfaces

Diameter in mm	Colour	Grade	Max. RPM	Packing unit/pcs.	Cat. number
50	bordeaux	medium	19100 rpm	50	295392
50	bordeaux	fine	19100 rpm	50	295393
50	bordeaux	very fine	19100 rpm	50	295394

Backing pad see page 181 / Adapter see page 184.

SCM quick change disc

QMC 800



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Non-woven material type	Non-woven material with fabric lining

Applications:

Metals	●
Stainless steel	●
Paint/Varnish/Filler	○

Advantages: For light deburring - For removal of rust and paint - Long life due to hard, stable quality of surface conditioning material

Diameter in mm	Colour	Grade	Max. RPM	Packing unit/pcs.	Cat. number
50	grey	coarse	19100 rpm	50	295410
50	violet	medium	19100 rpm	50	295411
50	blue	very fine	19100 rpm	50	295412
76	grey	coarse	12500 rpm	25	295416
76	violet	medium	12500 rpm	25	295417
76	blue	very fine	12500 rpm	25	295418

Backing pad see page 181 / Adapter see page 184.

Backing pad

QMC 555



Advantages: For secure mounting of QMC discs - Optimized abrasive properties (aggressiveness, surface quality) due to three hardnesses - Easy differentiation of the hardnesses through coloured rings - Fixing spindle can be unscrewed, therefore the use on angle grinder or with adapter QCA 555 is possible via 1/4"-20 thread


Diameter in mm	Thread/Shaft	Density	Colour	Max. RPM	Packing unit/pcs.	Cat. number
25	Shaft 6 mm	medium	blue	30000 rpm	1	295422
38	Shaft 6 mm	soft	grey	30000 rpm	1	300058
38	Shaft 6 mm	medium	blue	30000 rpm	1	295424
38	Shaft 6 mm	firm	red	30000 rpm	1	300059
50	Shaft 6 mm	soft	grey	30000 rpm	1	300060
50	Shaft 6 mm	medium	blue	30000 rpm	1	295426
50	Shaft 6 mm	firm	red	30000 rpm	1	295427
76	Shaft 6 mm	soft	grey	20000 rpm	1	300061
76	Shaft 6 mm	medium	blue	20000 rpm	1	295430
76	Shaft 6 mm	firm	red	20000 rpm	1	295431

Non-woven web

Quick Change Discs

Non-woven web quick change disc

QRC 400



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Non-woven material type	Soft non-woven material

Applications:

Paint/Varnish/Filler	●
Stainless steel	●
Metals	●


Advantages: Suitable for surface finishing work - For cleaning work on metals and painted surfaces

All sizes and minimum purchasing quantities available on request

Backing pad see page 184 / Adapter see page 184.

SCM quick change disc

QRC 800



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Non-woven material type	Non-woven material with fabric lining

Applications:

Metals	●
Stainless steel	●
Paint/Varnish/Filler	●

Advantages: For light deburring - For removal of rust and paint - Long life due to hard, stable quality of surface conditioning material

Diameter in mm	Colour	Grade	Max. RPM	Packing unit/pcs.	Cat. number
50	grey	coarse	19100 rpm	50	295413
50	violet	medium	19100 rpm	50	295414
50	blue	very fine	19100 rpm	50	295415
76	grey	coarse	12500 rpm	25	295419
76	violet	medium	12500 rpm	25	295420

Backing pad see page 184 / Adapter see page 184.

Unitized Quick Change Discs

QRC 500



Properties

Bonding agent	Resin
Grain	Aluminium oxide/SiC
Non-woven material type	Highly compacted material made of compressed non-woven web layers

Applications:

Stainless steel	●	NF metals	●
Titanium	●	Aluminium	●
Steel	●		
High alloy steel	●		

Advantages: Very long service life - Very fine, constant and brilliant surface pattern - Versatile, depending on density and structure (removal to polishing) - Very suitable for hard-to-reach areas (e.g. inside corners) - Can be used on the face and surface - Free of metallic ingredients

Diameter in mm	Colour	Grade	Density	Max. RPM	Packing unit/pcs.	Cat. number
51	grey	fine	2 SF soft	22100 rpm	10	358978
51	grey	fine	3 SF medium soft	22100 rpm	10	358981
51	grey	fine	6 SF hard	22100 rpm	10	358979
51	maroon	coarse	8 AC very hard	22100 rpm	10	358980
76	grey	fine	2 SF soft	15100 rpm	5	358982
76	grey	fine	3 SF medium soft	15100 rpm	5	358985
76	grey	fine	6 SF hard	15100 rpm	5	358983
76	maroon	coarse	8 AC very hard	15100 rpm	5	358984

Backing pad see page 184 / Adapter see page 184.

Quick Change Disc, Clean and Strip

QRC 200 HD



Properties

Bonding agent	Resin
Grain	Ceramic coated aluminium oxide
Non-woven material type	Clean and strip material

Applications:

Stainless steel	●
Steel	●
NF metals	●
Paint/Varnish/Filler	●

Advantages: Hard, aggressive cleaning fleece for heavy-duty use - Open structure, no clogging and cool grinding - Fast work progress and long service life - No change in workpiece geometry in metal applications - Can be used on the face and surface

Diameter in mm	Colour	Grade	Max. RPM	Packing unit/pcs.	Cat. number
51	green	extra coarse	10500 rpm	10	358993
76	green	extra coarse	7000 rpm	5	358994

Backing pad see page 184 / Adapter see page 184.

Non-woven web

Backing pads / Adapter

Backing pad

QRC 555



Advantages: For secure mounting of QRC discs - Optimized abrasive properties (aggressiveness, surface quality) due to two hardnesses - Easy differentiation of the hardnesses through coloured rings - Fixing spindle can be unscrewed, therefore the use on angle grinder or with adapter QCA 555 is possible via 1/4"-20 thread

Diameter in mm	Thread/Shaft	Density	Colour	Max. RPM	Packing unit/pcs.	Cat. number
25	Shaft 6 mm	medium	blue	30000 rpm	1	295423
38	Shaft 6 mm	medium	blue	30000 rpm	1	295425
50	Shaft 6 mm	medium	blue	30000 rpm	1	295428
50	Shaft 6 mm	firm	red	30000 rpm	1	295429
76	Shaft 6 mm	medium	blue	20000 rpm	1	295432
76	Shaft 6 mm	firm	red	20000 rpm	1	295433

Adapter for quick change disc backing pad

QCA 555



Advantages: Quick Change Disc Adapter with M14 female thread and 1/4"-20 male thread - Allows use of quick change discs on a regular angle grinder

Width x Length in mm	Thread/Shaft	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
20 x 30	thread M14	80 m/s	75400 rpm	1	308693


Non-woven web

Abrasive mop



Combi non-woven web mop

NCW 600



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Non-woven material type	Soft non-woven material + abrasive cloth flaps

Applications:

Stainless steel	●
Metals	●
Plastic	○


Advantages: Combination of non-woven and abrasive cloth flaps for a fine surface scratch pattern
- Optimal wear properties - High removal rate - Long service life

Diameter x Width x Bore in mm	Grit	Grade	Colour	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
165 x 50 x 43,1	80	coarse	maroon	32 m/s	3700 rpm	3	258909
165 x 50 x 43,1	100	medium	maroon	32 m/s	3700 rpm	3	258910
165 x 50 x 43,1	150	medium	maroon	32 m/s	3700 rpm	3	258911
165 x 50 x 43,1	180	very fine	maroon	32 m/s	3700 rpm	3	258912
200 x 50 x 68,2	80	coarse	maroon	32 m/s	3050 rpm	2	258913
200 x 50 x 68,2	100	medium	maroon	32 m/s	3050 rpm	2	258914
200 x 50 x 68,2	150	medium	maroon	32 m/s	3050 rpm	2	258915

Use only with mounting plate SMD 612 (page 160)!

Non-woven web mop

NFW 600



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Non-woven material type	Soft non-woven material

Applications:

Metals	●
Stainless steel	●

Advantages: Even finish throughout the entire service life - Optimal tool for creating a matt or satin finish

Diameter x Width x Bore in mm	Grade	Colour	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
165 x 50 x 43,1	coarse	maroon	32 m/s	3700 rpm	3	258898
165 x 50 x 43,1	medium	maroon	32 m/s	3700 rpm	3	258899
165 x 50 x 43,1	very fine	maroon	32 m/s	3700 rpm	3	258900
200 x 50 x 68,2	coarse	maroon	32 m/s	3050 rpm	2	258901
200 x 50 x 68,2	medium	maroon	32 m/s	3050 rpm	2	258902
200 x 50 x 68,2	very fine	maroon	32 m/s	3050 rpm	2	258903

Use only with mounting plate SMD 612 (page 160)!

Non-woven web

Abrasive mop

Combi non-woven web drum

NCW 600 S



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Non-woven material type	Soft non-woven material + abrasive cloth flaps

Applications:

Stainless steel	●
Metals	●
Plastic	○

Advantages: High removal rate and fine surface scratch pattern due to combination of non-woven and abrasive cloth flaps - Long service life

Diameter x Width x Bore in mm	Grit	Grade	Colour	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
100 x 50 x 19	80	coarse	maroon	19 m/s	3700 rpm	3	259896
100 x 50 x 19	100	medium	maroon	19 m/s	3700 rpm	3	259897
100 x 50 x 19	150	medium	maroon	19 m/s	3700 rpm	3	259898
100 x 50 x 19	180	very fine	maroon	19 m/s	3700 rpm	3	259899
100 x 100 x 19	80	coarse	maroon	19 m/s	3700 rpm	1	258905
100 x 100 x 19	100	medium	maroon	19 m/s	3700 rpm	1	258906
100 x 100 x 19	150	medium	maroon	19 m/s	3700 rpm	1	258907
100 x 100 x 19	180	very fine	maroon	19 m/s	3700 rpm	1	258908
110 x 100 x 19	80	coarse	maroon	19 m/s	3300 rpm	1	320246
110 x 100 x 19	100	medium	maroon	19 m/s	3300 rpm	1	320247
110 x 100 x 19	150	medium	maroon	19 m/s	3300 rpm	1	320248

Non-woven web drum

NFW 600 S



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Non-woven material type	Soft non-woven material

Applications:

Metals	●
Stainless steel	●

Advantages: Even finish throughout the entire service life - Optimal tool with high quality non-woven flaps for creating a matt or satin finish

Diameter x Width x Bore in mm	Grade	Colour	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
100 x 50 x 19	coarse	maroon	19 m/s	3700 rpm	3	259853
100 x 50 x 19	medium	maroon	19 m/s	3700 rpm	3	259854
100 x 50 x 19	very fine	maroon	19 m/s	3700 rpm	3	259895
100 x 100 x 19	coarse	maroon	19 m/s	3700 rpm	1	258895
100 x 100 x 19	medium	maroon	19 m/s	3700 rpm	1	258896



Non-woven web

Abrasive mop




►► Continuation of NFW 600 S, Non-woven web drum

Diameter x Width x Bore in mm	Grade	Colour	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
100 x 100 x 19	very fine	maroon	19 m/s	3700 rpm	1	258897
110 x 100 x 19	coarse	maroon	19 m/s	3300 rpm	1	320253
110 x 100 x 19	medium	maroon	19 m/s	3300 rpm	1	320254
110 x 100 x 19	very fine	maroon	19 m/s	3300 rpm	1	320255

Combi non-woven web spindle mop

NCS 600



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Non-woven material type	Soft non-woven material + abra- sive cloth flaps

Applications:

Stainless steel	●
Metals	●
Plastic	○

Advantages: High removal rate and fine surface scratch pattern due to combination of non-woven and abrasive cloth flaps - Long service life


Diameter x Width x Shaft in mm	Grit	Grade	Colour	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
50 x 30 x 6	60	coarse	maroon	32 m/s	12200 rpm	10	258932
50 x 30 x 6	100	medium	maroon	32 m/s	12200 rpm	10	258933
50 x 30 x 6	150	medium	maroon	32 m/s	12200 rpm	10	258934
50 x 30 x 6	240	very fine	maroon	32 m/s	12200 rpm	10	258935
60 x 30 x 6	60	coarse	maroon	32 m/s	10200 rpm	10	258936
60 x 30 x 6	100	medium	maroon	32 m/s	10200 rpm	10	258937
60 x 30 x 6	150	medium	maroon	32 m/s	10200 rpm	10	258938
60 x 30 x 6	240	very fine	maroon	32 m/s	10200 rpm	10	258939
60 x 50 x 6	60	coarse	maroon	32 m/s	10200 rpm	10	258940
60 x 50 x 6	100	medium	maroon	32 m/s	10200 rpm	10	258941
60 x 50 x 6	150	medium	maroon	32 m/s	10200 rpm	10	258942
60 x 50 x 6	240	very fine	maroon	32 m/s	10200 rpm	10	258943
80 x 50 x 6	60	coarse	maroon	32 m/s	7600 rpm	10	258944
80 x 50 x 6	100	medium	maroon	32 m/s	7600 rpm	10	258945
80 x 50 x 6	150	medium	maroon	32 m/s	7600 rpm	10	258946
80 x 50 x 6	240	very fine	maroon	32 m/s	7600 rpm	10	258947
100 x 50 x 6	60	coarse	maroon	32 m/s	6100 rpm	4	258948
100 x 50 x 6	100	medium	maroon	32 m/s	6100 rpm	4	258949
100 x 50 x 6	150	medium	maroon	32 m/s	6100 rpm	4	258950
100 x 50 x 6	240	very fine	maroon	32 m/s	6100 rpm	4	258951

Non-woven web

Abrasive mop

Non-woven web spindle mop

NFS 600



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Non-woven material type	Soft non-woven material

Applications:

Metals	●
Stainless steel	●

Advantages: Even finish throughout the entire service life - Optimal tool with high quality non-woven flaps for creating a matt or satin finish

Diameter x Width x Shaft in mm	Grade	Colour	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
50 x 30 x 6	coarse	maroon	32 m/s	12200 rpm	10	258917
50 x 30 x 6	medium	maroon	32 m/s	12200 rpm	10	258918
50 x 30 x 6	very fine	maroon	32 m/s	12200 rpm	10	258919
60 x 30 x 6	coarse	maroon	32 m/s	10200 rpm	10	258920
60 x 30 x 6	medium	maroon	32 m/s	10200 rpm	10	258921
60 x 30 x 6	very fine	maroon	32 m/s	10200 rpm	10	258922
60 x 50 x 6	coarse	maroon	32 m/s	10200 rpm	10	258923
60 x 50 x 6	medium	maroon	32 m/s	10200 rpm	10	258924
60 x 50 x 6	very fine	maroon	32 m/s	10200 rpm	10	258925
80 x 50 x 6	coarse	maroon	32 m/s	7600 rpm	10	258926
80 x 50 x 6	medium	maroon	32 m/s	7600 rpm	10	258927
80 x 50 x 6	very fine	maroon	32 m/s	7600 rpm	10	258928
100 x 50 x 6	coarse	maroon	32 m/s	6000 rpm	4	258929
100 x 50 x 6	medium	maroon	32 m/s	6000 rpm	4	258930
100 x 50 x 6	very fine	maroon	32 m/s	6000 rpm	4	258931

Non-woven web

Abrasive mop discs



Non-woven mop disc

SMT 800 SPECIAL



Properties

Grain	Aluminium oxide
Non-woven material type	Non-woven material with fabric lining
Backing plate	Glass fibre
Design	Convex 12°

Applications:

Stainless steel	●
Steel	●



Advantages: High quality non-woven mop disc for stainless steel finish work - Optimal results when used on variable speed angle grinders - Three grades

Diameter x Bore in mm	Form	Grade	Colour	Max. operating speed	Max. RPM	Recommended operating speed	Recommended RPM	Packing unit/pcs.	Cat. number
115 x 22,23		coarse	brown	80 m/s	13300 rpm	42 m/s	7000 rpm	5	278495
115 x 22,23		medium	maroon	80 m/s	13300 rpm	42 m/s	7000 rpm	5	278496
115 x 22,23		very fine	green	80 m/s	13300 rpm	42 m/s	7000 rpm	5	278497
125 x 22,23		coarse	brown	80 m/s	12200 rpm	42 m/s	6400 rpm	5	278498
125 x 22,23		medium	maroon	80 m/s	12200 rpm	42 m/s	6400 rpm	5	278499
125 x 22,23		very fine	green	80 m/s	12200 rpm	42 m/s	6400 rpm	5	278500

Combi-abrasive mop disc

SMT 850 plus SPECIAL



Properties

Grain	Aluminium oxide
Non-woven material type	Non-woven material with fabric lining + abrasive cloth flaps
Backing plate	Glass fibre
Design	Convex 12°

Applications:

Stainless steel	●
-----------------	---



Advantages: High-quality combi surface conditioning mop disc - Specially suited for machining of WIG weld seams on stainless steel components - Even finish throughout the entire service life - Stock removal and finishing in one step


Diameter x Bore in mm	Form	Grit	Grade	Colour	Max. operating speed	Max. RPM	Recommended operating speed	Recommended RPM	Packing unit/pcs.	Cat. number
115 x 22,23		60	coarse	brown	80 m/s	13300 rpm	42 m/s	7000 rpm	5	312556
115 x 22,23		80	medium	maroon	80 m/s	13300 rpm	42 m/s	7000 rpm	5	312557
115 x 22,23		120	very fine	green	80 m/s	13300 rpm	42 m/s	7000 rpm	5	312558
125 x 22,23		60	coarse	brown	80 m/s	12200 rpm	42 m/s	6400 rpm	5	312559
125 x 22,23		80	medium	maroon	80 m/s	12200 rpm	42 m/s	6400 rpm	5	312560
125 x 22,23		120	very fine	green	80 m/s	12200 rpm	42 m/s	6400 rpm	5	312561

Non-woven web

Unitized wheels

Unitized disc

MFW 600



Properties

Bonding agent	Resin
Grain	SiC
Non-woven material type	Highly compacted material made of compressed non-woven web layers

Applications:

Steel	●
Stainless steel	●
NF metals	●

Advantages: Special product for finishing stainless steel weld seams - 4 different grades for material removal up to high gloss

Diameter x Width x Bore in mm	Grade	Colour	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
125 x 6 x 22	coarse	red	59 m/s	9000 rpm	5	342218
125 x 6 x 22	medium	grey	59 m/s	9000 rpm	5	342219
125 x 6 x 22	fine	grey	39 m/s	5900 rpm	5	342237
150 x 3 x 25,4	coarse	red	59 m/s	7500 rpm	10	337948
150 x 3 x 25,4	medium	grey	59 m/s	7500 rpm	10	337949
150 x 6 x 25,4	coarse	red	59 m/s	7500 rpm	5	337944
150 x 6 x 25,4	medium	grey	59 m/s	7500 rpm	5	337945
150 x 6 x 25,4	fine	grey	39 m/s	5000 rpm	5	337946
150 x 6 x 25,4	very fine	grey	39 m/s	5000 rpm	5	337947

Unitized disc

NUD 500



Properties

Bonding agent	Resin
Grain	SiC
Non-woven material type	Highly compacted material made of compressed non-woven web layers

Applications:

Alloyed steels	●	Chrome and nickel steels	●
High alloy steel	●	Steel	●
Non-ferrous metals	●	Titanium	●
Light metals	●		

Backing plate Glass fibre

Design Flat

Advantages: For cleaning and pre-polishing surfaces - For smoothing weld seams - Fewer work steps - Precise cleaning, clearing and finishing of surfaces - Achieves an ultra-low scratch depth on the processed material

Diameter x Width x Bore in mm	Grade	Colour	Max. operating speed	Max. RPM	Recommended RPM	Packing unit/pcs.	Cat. number
115 x 13 x 22,23	coarse	grey	63 m/s	10450 rpm	5800 rpm	5	337864
115 x 13 x 22,23	medium	grey	63 m/s	10450 rpm	5800 rpm	5	337865
115 x 13 x 22,23	very fine	grey	63 m/s	10450 rpm	5800 rpm	5	337866
125 x 13 x 22,23	coarse	grey	63 m/s	9600 rpm	5300 rpm	5	337861
125 x 13 x 22,23	medium	grey	63 m/s	9600 rpm	5300 rpm	5	337862
125 x 13 x 22,23	very fine	grey	63 m/s	9600 rpm	5300 rpm	5	337863

Non-woven convolute wheels

NCO 700 DB



Properties

Bonding agent	Resin
Grain	SiC
Non-woven material type	Highly compacted material made of wound non-woven web layers

Applications:

Stainless steel	●	NF metals	●
Titanium/Alloy	●	Aluminium	●
Steel	●	Plastic	○
High alloy steel	●		

Advantages: Open structure, no clogging - Excellent satin finish with very low surface roughness - Good service life, consistent, reproducible finish - Removal of medium (7SF) to heavy burrs (9SF) without secondary burr formation - Cost-effective version with excellent price/performance ratio for applications with lower rotational speeds

Diameter x Width x Bore in mm	Colour	Grade	Density	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
152,4 x 25,4 x 25,4	grey	fine	7 SF	47 m/s	6000 rpm	2	366498
152,4 x 25,4 x 25,4	grey	fine	8 SF	47 m/s	6000 rpm	2	366499
152,4 x 25,4 x 25,4	grey	fine	9 SF	47 m/s	6000 rpm	2	366500
203,2 x 51 x 76,2	grey	fine	7 SF	36 m/s	3450 rpm	1	367522
203,2 x 51 x 76,2	grey	fine	8 SF	36 m/s	3450 rpm	1	367523
203,2 x 51 x 76,2	grey	fine	9 SF	36 m/s	3450 rpm	1	367524

Reduction flange RF 712 see page 192.

Non-woven convolute wheels

NCO 710 DB



Properties

Bonding agent	Resin
Grain	SiC
Non-woven material type	Highly compacted material made of wound non-woven web layers

Applications:

Stainless steel	●	NF metals	●
Titanium/Alloy	●	Aluminium	●
Steel	●	Plastic	○
High alloy steel	●		

Advantages: Open structure, no clogging - Produces an excellent satin finish with very low surface roughness - Long service life, consistent and reproducible finish - Removal of medium (7SF) to heavy burrs (9SF) without secondary burr formation - Premium version with excellent service life and performance

Diameter x Width x Bore in mm	Colour	Grade	Density	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
152,4 x 25,4 x 25,4	grey	fine	7 SF	47 m/s	6000 rpm	2	366877
152,4 x 25,4 x 25,4	grey	fine	8 SF	47 m/s	6000 rpm	2	366907
152,4 x 25,4 x 25,4	grey	fine	9 SF	47 m/s	6000 rpm	2	366909
203,2 x 51 x 76,2	grey	fine	7 SF	47 m/s	4500 rpm	1	367525
203,2 x 51 x 76,2	grey	fine	8 SF	47 m/s	4500 rpm	1	367526
203,2 x 51 x 76,2	grey	fine	9 SF	47 m/s	4500 rpm	1	367527

Reduction flange RF 712 see page 192.

Non-woven web

Reduction flange / Clean and strip discs

Reduction flange

RF 712



Advantages: Wheel flange for clamping non-woven convolute wheels NCO 700/710 on stationary machines - Bore adaptable to required shaft diameter -

Packing unit: 2 pieces (1 pair)

Diameter in mm	Suitable for	Packing unit/pcs.	Cat. number
115	NCO700/710 with 76,2 mm inner bore	2	372122

Clean and strip disc, extra coarse

NCD 200



Properties

Bonding agent	Resin
Grain	SiC
Non-woven material type	Clean and strip material
Backing plate	Glass fibre
Design	Flat

Applications:

Stainless steel	●
Steel	●
NF metals	●
Paint/Varnish/Filler	●

Plastic	●
---------	---

Advantages: Special SiC non-woven web for cleaning of surfaces and removal of heat tinting/blueing - No clogging due to open structure - For the removal of paint and rust

Diameter x Bore in mm	Form	Colour	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 22,23		black	63 m/s	10450 rpm	5	259043
125 x 22,23		black	63 m/s	9600 rpm	5	259044

Non-woven web

Clean and strip discs / Power Wheel



Clean and strip disc, heavy duty

NCD 200 HD



Properties

Bonding agent	Resin
Grain	Ceramic coated aluminium oxide
Non-woven material type	Clean and strip material
Backing plate	Glass fibre
Design	Flat

Applications:



Stainless steel	●
Steel	●
NF metals	●
Paint/Varnish/Filler	●

Advantages: Hard, aggressive non-woven version for higher loads - Open structure - No clogging - Cool grinding - Fast work progress and long service life - No change in workpiece contour

Diameter x Bore in mm	Form	Grade	Colour	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 22,23		extra coarse	green	63 m/s	10450 rpm	5	358003
125 x 22,23		extra coarse	green	63 m/s	9600 rpm	5	358004

Clean and Strip Power Wheel, extra coarse

PW 2000



Properties

Bonding agent	Resin
Grain	SiC
Non-woven material type	Clean and strip material

Applications:

Paint/Varnish/Filler	●
Plastic	●
Metals	●
Stone	●

Advantages: Special non-woven web, ideal for removing heat tinting, oxide layers, rust and paint residue - For cleaning of weld seams - No clogging

Diameter x Width x Bore in mm	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
100 x 13 x 13	40 m/s	7600 rpm	10	194625
150 x 13 x 13	40 m/s	5000 rpm	10	194626

Non-woven web

Fixing spindle

Fixing spindle

SD 2000



Advantages: For secure mounting on drilling machines, flexible shafts and stroke grinders and optimal true running of the grinding tool PW 2000

Shaft in mm	Suitable for	Packing unit/pcs.	Cat. number
6	1 wheel Ø 100 - Ø 200	1	194629
8	1-2 wheels Ø 100 - Ø 200	1	194632



Abrasive mop discs

Type		Material						Application				Page
		Steel	Stainless steel	High alloy stainless steel	NF metals	Aluminium	Wood	Finish grinding	Welded seam work	Edge work, bevelling	Deburring, levelling	
SMT 314 EXTRA		●			●	●	○		●	●		197
SMT 324 EXTRA		●	●	●				●				198
SMT 324 EXTRA		●	●	●					●	●		198
SMT 325 EXTRA		●	●	●				●				199
SMT 325 EXTRA		●	●	●					●	●		199
SMT 624 SUPRA		●	●	●					●	●		200
SMT 626 SUPRA		●	●	●					●	●	●	202
SMT 628 SUPRA		●	●	●				●				201
SMT 636 SUPRA			●	●	○	○		●				
SMT 636 SUPRA			●	●	○	○			●	●		203
SMT 644 SUPRA		●	●	●				●				203
SMT 644 SUPRA		●	●	●					●	●		203
SMT 645 SUPRA		●	●	●				●				204
SMT 674 SUPRA		●	●						●	●		205
SMT 674 SUPRA		●	●					●				205
SMT 924 SPECIAL		●	●						●	●	●	206
SMT 925 SPECIAL		●	●	●				●				207
SMT 925 SPECIAL		●	●	●					●	●		207
SMT 926 SPECIAL		●	●	●					●	●	●	208
SMT 974 SPECIAL		●	●						●	●	●	206
SMT 975 SPECIAL		●	●						●	●	●	208
SMT 976 SPECIAL			●	●	○	○			●	●	●	209
SMT 996 SPECIAL			●	●				●				
SMT 996 SPECIAL			●	●					●	●	●	209
MST 624 SUPRA		●	●						●	●	●	210
MST 924 SPECIAL		●	●						●	●	●	210

● = main application ○ = possible application *on request

Minimum order quantities for made to order items

Diameter	Minimum order quantities
up to 150 mm	320 pieces
180 mm	160 pieces

Abrasive mop disc

SMT 314 EXTRA



Class	EXTRA
Aggression	■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ □ □ □

Applications:	
Steel	●
NF metals	●
Wood	○



Properties	
Grain	Aluminium oxide
Backing plate	Glass fibre
Design	Convex 12°

Advantages: Good stock removal rate on unalloyed steels - Also suitable for non-ferrous metals - Good removal rate on angle grinders of all performance classes

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Bore in mm	Form	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 22,23		36	80 m/s	13300 rpm	10	322808
115 x 22,23		40	80 m/s	13300 rpm	10	322809
115 x 22,23		60	80 m/s	13300 rpm	10	322811
115 x 22,23		80	80 m/s	13300 rpm	10	322812
115 x 22,23		120	80 m/s	13300 rpm	10	322813
125 x 22,23		36	80 m/s	12200 rpm	10	322814
125 x 22,23		40	80 m/s	12200 rpm	10	322815
125 x 22,23		60	80 m/s	12200 rpm	10	322817
125 x 22,23		80	80 m/s	12200 rpm	10	322818
125 x 22,23		120	80 m/s	12200 rpm	10	322819
180 x 22,23		40	80 m/s	8500 rpm	10	322821
180 x 22,23		60	80 m/s	8500 rpm	10	322822

Abrasive mop discs

Abrasive mop disc

SMT 324 EXTRA



Class	EXTRA
Aggression	■■■■■□□
Service life	■■■■■□□

Applications:	
Stainless steel	●
Steel	●



Properties	
Grain	Zirconia alumina
Backing plate	Glass fibre
Design	Convex 12°, flat

Advantages: Universal product for edges and surface work on steel and stainless steel - Good removal rate on angle grinders of all performance classes - No glazing, also under low grinding pressure

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Bore in mm	Form	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 22,23		40	80 m/s	13300 rpm	10	321509
115 x 22,23		60	80 m/s	13300 rpm	10	321511
115 x 22,23		80	80 m/s	13300 rpm	10	321513
115 x 22,23		40	80 m/s	13300 rpm	10	321645
115 x 22,23		60	80 m/s	13300 rpm	10	321647
115 x 22,23		80	80 m/s	13300 rpm	10	321649
125 x 22,23		40	80 m/s	12200 rpm	10	321510
125 x 22,23		60	80 m/s	12200 rpm	10	321512
125 x 22,23		80	80 m/s	12200 rpm	10	321514
125 x 22,23		40	80 m/s	12200 rpm	10	321646
125 x 22,23		60	80 m/s	12200 rpm	10	321648
125 x 22,23		80	80 m/s	12200 rpm	10	321650

Abrasive mop disc

SMT 325 EXTRA



Class	EXTRA
Aggression	■■■■■□□
Service life	■■■■■□□



Applications:	
Stainless steel	●
Steel	●

XLOCK !

Properties	
Grain	Zirconia alumina
Backing plate	Plastic, glass-fibre reinforced
Design	Convex 12°, flat

Advantages: Universal product for edges and surface work on steel and stainless steel - Good removal rate on angle grinders of all performance classes - No glazing, also under low grinding pressure

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Bore in mm	Form	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 22,23		40	80 m/s	13300 rpm	10	321659
115 x 22,23		60	80 m/s	13300 rpm	10	321661
115 x 22,23		80	80 m/s	13300 rpm	10	321663
115 x 22,23		40	80 m/s	13300 rpm	10	321653
115 x 22,23		60	80 m/s	13300 rpm	10	321655
115 x 22,23		80	80 m/s	13300 rpm	10	321657
115 x 22,23 X-LOCK		40	80 m/s	13300 rpm	10	351281
115 x 22,23 X-LOCK		60	80 m/s	13300 rpm	10	351280
115 x 22,23 X-LOCK		80	80 m/s	13300 rpm	10	351279
125 x 22,23		40	80 m/s	12200 rpm	10	321660
125 x 22,23		60	80 m/s	12200 rpm	10	321662
125 x 22,23		80	80 m/s	12200 rpm	10	321664
125 x 22,23		40	80 m/s	12200 rpm	10	321654
125 x 22,23		60	80 m/s	12200 rpm	10	321656
125 x 22,23		80	80 m/s	12200 rpm	10	321658
125 x 22,23 X-LOCK		40	80 m/s	12200 rpm	10	351278
125 x 22,23 X-LOCK		60	80 m/s	12200 rpm	10	351277
125 x 22,23 X-LOCK		80	80 m/s	12200 rpm	10	351276

Abrasive mop discs

Abrasive mop disc

SMT 624 SUPRA



Class	SUPRA
Aggression	■■■■■□
Service life	■■■■■□□

Applications:	
Stainless steel	●
Steel	●



Properties	
Grain	Zirconia alumina
Backing plate	Glass fibre
Design	Convex 12°

Advantages: Aggressive stock removal rate and comfortable grinding behaviour - For universal use in demanding grinding work on steel and stainless steel - Optimal removal rate when used on high power angle grinders

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
Diameter x Bore in mm				Form		Grit		Max. operating speed				Max. RPM				Packing unit/pcs.				Cat. number						
100 x 16						36		80 m/s				15300 rpm				10				322758						
100 x 16						40		80 m/s				15300 rpm				10				322759						
100 x 16						60		80 m/s				15300 rpm				10				322760						
100 x 16						80		80 m/s				15300 rpm				10				322761						
115 x 22,23						36		80 m/s				13300 rpm				10				322764						
115 x 22,23						40		80 m/s				13300 rpm				10				322765						
115 x 22,23						50		80 m/s				13300 rpm				10				322766						
115 x 22,23						60		80 m/s				13300 rpm				10				322767						
115 x 22,23						80		80 m/s				13300 rpm				10				322768						
115 x 22,23						120		80 m/s				13300 rpm				10				322769						
125 x 22,23						36		80 m/s				12200 rpm				10				322771						
125 x 22,23						40		80 m/s				12200 rpm				10				322772						
125 x 22,23						50		80 m/s				12200 rpm				10				322773						
125 x 22,23						60		80 m/s				12200 rpm				10				322774						
125 x 22,23						80		80 m/s				12200 rpm				10				322775						
125 x 22,23						120		80 m/s				12200 rpm				10				322776						
150 x 22,23						40		80 m/s				10200 rpm				10				322778						
150 x 22,23						60		80 m/s				10200 rpm				10				322779						
150 x 22,23						80		80 m/s				10200 rpm				10				322780						
180 x 22,23						36		80 m/s				8500 rpm				10				322782						
180 x 22,23						40		80 m/s				8500 rpm				10				322783						
180 x 22,23						60		80 m/s				8500 rpm				10				322785						
180 x 22,23						80		80 m/s				8500 rpm				10				322786						
180 x 22,23						120		80 m/s				8500 rpm				10				322787						

Abrasive mop disc

SMT 628 SUPRA



Class	SUPRA
Aggression	■ ■ ■ ■ ■ ■ ■ □
Service life	■ ■ ■ ■ ■ □ □ □

Applications:	
Stainless steel	●
Steel	●



Properties	
Grain	Zirconia alumina
Backing plate	Glass fibre
Design	Flat

Advantages: Especially suitable for surface grinding of steel and stainless steel - Optimal removal rate when used on high power angle grinders - Aggressive stock removal rate and comfortable grinding behaviour

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Bore in mm	Form	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 22,23		36	80 m/s	13300 rpm	10	322789
115 x 22,23		40	80 m/s	13300 rpm	10	322790
115 x 22,23		60	80 m/s	13300 rpm	10	322792
115 x 22,23		80	80 m/s	13300 rpm	10	322793
115 x 22,23		120	80 m/s	13300 rpm	10	322794
125 x 22,23		36	80 m/s	12200 rpm	10	322795
125 x 22,23		40	80 m/s	12200 rpm	10	322796
125 x 22,23		60	80 m/s	12200 rpm	10	322798
125 x 22,23		80	80 m/s	12200 rpm	10	322799
125 x 22,23		120	80 m/s	12200 rpm	10	322800
180 x 22,23		36	80 m/s	8500 rpm	10	322802
180 x 22,23		40	80 m/s	8500 rpm	10	322803
180 x 22,23		60	80 m/s	8500 rpm	10	322805
180 x 22,23		80	80 m/s	8500 rpm	10	322806

Abrasive mop discs

Abrasive mop disc

SMT 626

SUPRA



Class	SUPRA
Aggression	■■■■■□
Service life	■■■■■□

Applications:	
Stainless steel	●
Steel	●



Properties	
Grain	Zirconia alumina
Backing plate	Glass fibre
Design	Convex 6°

Advantages: High material removal rates - Considerably longer service life due to unique flap angle

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Bore in mm	Form	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 22,23		36	80 m/s	13300 rpm	10	321686
115 x 22,23		40	80 m/s	13300 rpm	10	321689
115 x 22,23		50	80 m/s	13300 rpm	10	321692
115 x 22,23		60	80 m/s	13300 rpm	10	321694
115 x 22,23		80	80 m/s	13300 rpm	10	321697
115 x 22,23		120	80 m/s	13300 rpm	10	321683
125 x 22,23		36	80 m/s	12200 rpm	10	321687
125 x 22,23		40	80 m/s	12200 rpm	10	321690
125 x 22,23		50	80 m/s	12200 rpm	10	321693
125 x 22,23		60	80 m/s	12200 rpm	10	321695
125 x 22,23		80	80 m/s	12200 rpm	10	321698
125 x 22,23		120	80 m/s	12200 rpm	10	321684
180 x 22,23		36	80 m/s	8500 rpm	10	321688
180 x 22,23		40	80 m/s	8500 rpm	10	321691
180 x 22,23		60	80 m/s	8500 rpm	10	321696
180 x 22,23		80	80 m/s	8500 rpm	10	321699

Abrasive mop disc, multibond

SMT 636 SUPRA



Class	SUPRA
Aggression	■ ■ ■ ■ ■ ■ □
Service life	■ ■ ■ ■ ■ □ □

Applications:	
Stainless steel	●



Properties	
Grain	Zirconia alumina multibond
Backing plate	Glass fibre
Design	Convex 6°, flat

Advantages: Special product for use on stainless steel - Cool grinding due to multibond - Suitable for use on edges and surfaces - No glazing or clogging

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Bore in mm	Form	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 22,23		40	80 m/s	13300 rpm	10	322826
115 x 22,23		80	80 m/s	13300 rpm	10	322828
125 x 22,23		40	80 m/s	12200 rpm	10	322831
125 x 22,23		60	80 m/s	12200 rpm	10	322832
125 x 22,23		80	80 m/s	12200 rpm	10	322833

Abrasive mop disc

SMT 644 SUPRA



Class	SUPRA
Aggression	■ ■ ■ ■ ■ ■ □
Service life	■ ■ ■ ■ ■ □ □

Applications:	
Steel	●
Stainless steel	●



Properties	
Grain	Zirconia alumina
Backing plate	Glass fibre
Design	Convex 12°, flat

Advantages: Long service life when used on extremely steep edges - Constant stock removal level even when used on surfaces - No glazing or clogging, even at low machine output or low grinding pressure (<1000W)

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Bore in mm	Form	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 22,23		40	80 m/s	13300 rpm	10	329993
115 x 22,23		80	80 m/s	13300 rpm	10	329995
115 x 22,23		40	80 m/s	13300 rpm	10	329989
125 x 22,23		40	80 m/s	12200 rpm	10	330005
125 x 22,23		60	80 m/s	12200 rpm	10	330006
125 x 22,23		80	80 m/s	12200 rpm	10	330007



Abrasive mop discs

► Continuation of SMT 644, Abrasive mop disc

Diameter x Bore in mm	Form	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
125 x 22,23		120	80 m/s	12200 rpm	10	330008
125 x 22,23		40	80 m/s	12200 rpm	10	329997
125 x 22,23		60	80 m/s	12200 rpm	10	330002
125 x 22,23		80	80 m/s	12200 rpm	10	330003

Abrasive mop disc

SMT 645
SUPRA



Class	SUPRA
Aggression	■■■■■■■□
Service life	■■■■■■■

Applications:	
Stainless steel	●
Steel	●



Properties	
Grain	Zirconia alumina
Backing plate	Plastic, glass-fibre reinforced
Design	Flat

Advantages: High edge stability - Very good removal rate also on low power angle grinders - Long service life due to double grinding flaps

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Bore in mm	Form	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 22,23		40	80 m/s	13300 rpm	10	278590
115 x 22,23		60	80 m/s	13300 rpm	10	278591
115 x 22,23		80	80 m/s	13300 rpm	10	278592

Abrasive mop disc CEVOLUTION

SMT 674 SUPRA CEVOLUTION



Class	SUPRA
Aggression	■■■■■■■
Service life	■■■■■□□

Applications:	
Steel	●
Stainless steel	○



Properties	
Grain	Ceramic Al. oxide
Backing plate	Glass fibre
Design	Convex 12°, flat

Advantages: Universally suitable for all grinding tasks in the steel sector - Also suitable for stainless steel - Optimum price/performance ratio due to ceramic grain - The SMT 674 includes the new CEVOLUTION technology. CEVOLUTION stands for holistically optimized, ceramic abrasives. Klingspor products with CEVOLUTION technology contain, among others, an optimized grit mix, grit sizes and formulation in order to offer the maximum performance in every application.

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Bore in mm	Form	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 22,23		40	80 m/s	13300 rpm	10	369262
115 x 22,23		60	80 m/s	13300 rpm	10	369261
115 x 22,23		80	80 m/s	13300 rpm	10	369260
115 x 22,23		40	80 m/s	13300 rpm	10	369269
115 x 22,23		60	80 m/s	13300 rpm	10	369265
115 x 22,23		80	80 m/s	13300 rpm	10	369276
125 x 22,23		40	80 m/s	12200 rpm	10	369259
125 x 22,23		60	80 m/s	12200 rpm	10	369258
125 x 22,23		80	80 m/s	12200 rpm	10	369257
125 x 22,23		40	80 m/s	12200 rpm	10	369275
125 x 22,23		60	80 m/s	12200 rpm	10	369274
125 x 22,23		80	80 m/s	12200 rpm	10	369273
180 x 22,23		40	80 m/s	8500 rpm	10	369268
180 x 22,23		60	80 m/s	8500 rpm	10	369267
180 x 22,23		80	80 m/s	8500 rpm	10	369266

Abrasive mop discs

Abrasive mop disc

SMT 924 SPECIAL



Class	SPECIAL
Aggression	■■■■■■■■
Service life	■■■■■■■■

Applications:	
Stainless steel	●
Steel	●



Properties	
Grain	Ceramic Al. oxide
Backing plate	Glass fibre
Design	Convex 6°

Advantages: Highly aggressive abrasive performance for demanding work on edges - High edge stability - Optimal removal rate when used on high power angle grinders under increased grinding pressure

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Bore in mm	Form	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 22,23		40	80 m/s	13300 rpm	10	322862
115 x 22,23		60	80 m/s	13300 rpm	10	322863
115 x 22,23		80	80 m/s	13300 rpm	10	322864
125 x 22,23		40	80 m/s	12200 rpm	10	322867
125 x 22,23		60	80 m/s	12200 rpm	10	322868
125 x 22,23		80	80 m/s	12200 rpm	10	322869

CEVOLUTION

Abrasive mop disc CEVOLUTION

SMT 974 SPECIAL CEVOLUTION



Class	SPECIAL
Aggression	■■■■■■■■
Service life	■■■■■■■■

Applications:	
Steel	●
Stainless steel	○



Properties	
Grain	Ceramic Al. oxide
Backing plate	Glass fibre
Design	Convex 6°

Advantages: Newly developed abrasive for demanding grinding tasks in the steel sector - Optimal tool for edge and weld seam finishing - Highly economical on powerful angle grinders - The SMT 974 includes the new CEVOLUTION technology. CEVOLUTION stands for holistically optimized, ceramic abrasives. Klingspor products with CEVOLUTION technology contain, among others, an optimized grit mix, grit sizes and formulation in order to offer the maximum performance in every application.

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Bore in mm	Form	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 22,23		40	80 m/s	13300 rpm	10	369283
115 x 22,23		60	80 m/s	13300 rpm	10	369282
115 x 22,23		80	80 m/s	13300 rpm	10	369281
125 x 22,23		40	80 m/s	12200 rpm	10	369280
125 x 22,23		60	80 m/s	12200 rpm	10	369279
125 x 22,23		80	80 m/s	12200 rpm	10	369278

Abrasive mop disc

SMT 925 SPECIAL



Class	SPECIAL
Aggression	■■■■■■■
Service life	■■■■■■■□

Applications:	
Stainless steel	●
Steel	●



Properties	
Grain	Zirconia alumina
Backing plate	Plastic, glass-fibre reinforced
Design	Convex 12°, flat

Advantages: Significantly higher abrasive performance and service life - Optimal removal rate when used on high-power angle grinders under increased grinding pressure - High removal rate and long service life

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Bore in mm	Form	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 22,23		40	80 m/s	13300 rpm	10	321714
115 x 22,23		36	80 m/s	13300 rpm	10	321668
115 x 22,23		40	80 m/s	13300 rpm	10	321670
115 x 22,23		60	80 m/s	13300 rpm	10	321674
115 x 22,23		80	80 m/s	13300 rpm	10	321677
125 x 22,23		40	80 m/s	12200 rpm	10	321719
125 x 22,23		60	80 m/s	12200 rpm	10	321720
125 x 22,23		40	80 m/s	12200 rpm	10	321671
125 x 22,23		60	80 m/s	12200 rpm	10	321675
125 x 22,23		80	80 m/s	12200 rpm	10	321678
180 x 22,23		24	80 m/s	8500 rpm	5	321667
180 x 22,23		40	80 m/s	8500 rpm	5	321672
180 x 22,23		60	80 m/s	8500 rpm	5	321676

Abrasive mop discs

CEVOLUTION

Abrasive mop disc CEVOLUTION

SMT 975 SPECIAL CEVOLUTION



Class	SPECIAL
Aggression	■■■■■■■■■
Service life	■■■■■■■■■

Applications:	
Steel	●
Stainless steel	○



Properties	
Grain	Ceramic Al. oxide
Backing plate	Plastic, glass-fibre reinforced
Design	Convex 6°

Advantages: High and fast stock removal due to newly developed abrasive with self-sharpening ceramic grain - Easy mounting due to integrated M14 thread - Very long tool life due to trimmable backing plate - The SMT 975 includes the new CEVOLUTION technology. CEVOLUTION stands for holistically optimized, ceramic abrasives. Klingspor products with CEVOLUTION technology contain, among others, an optimized grit mix, grit sizes and formulation in order to offer the maximum performance in every application.

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Bore in mm	Form	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115		40	80 m/s	13300 rpm	10	369295
115		60	80 m/s	13300 rpm	10	369296
115		80	80 m/s	13300 rpm	10	369297
125		40	80 m/s	12200 rpm	10	369301
125		60	80 m/s	12200 rpm	10	369303
125		80	80 m/s	12200 rpm	10	369304

Abrasive mop disc

SMT 926 SPECIAL



Class	SPECIAL
Aggression	■■■■■■■■□
Service life	■■■■■■■■■

Applications:	
Stainless steel	●
Steel	●



Properties	
Grain	Zirconia alumina
Backing plate	Glass fibre
Design	Convex 6°

Advantages: Maximum removal rate and service life - Especially suitable for rough work on steel and stainless steel - Optimal removal rate when used on high power angle grinders under increased grinding pressure

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Bore in mm	Form	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 22,23		40	80 m/s	13300 rpm	10	321703
115 x 22,23		60	80 m/s	13300 rpm	10	321706
115 x 22,23		80	80 m/s	13300 rpm	10	321708
125 x 22,23		40	80 m/s	12200 rpm	10	321704
125 x 22,23		60	80 m/s	12200 rpm	10	321707
125 x 22,23		80	80 m/s	12200 rpm	10	321709
180 x 22,23		40	80 m/s	8500 rpm	10	321705

Abrasive mop disc, multibond

SMT 996 SPECIAL



Class	SPECIAL
Aggression	■■■■■■■
Service life	■■■■■■■□

Applications:	
Stainless steel	●



Properties	
Grain	Ceramic aluminium oxide multibond
Backing plate	Glass fibre
Design	Convex 6°, flat

Advantages: Aggressive abrasive performance with little expenditure of energy - High edge stability - Cool grinding due to multibond - Optimal removal rate when used on high power angle grinders under increased grinding pressure

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Bore in mm	Form	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 22,23		40	80 m/s	13300 rpm	10	322849
115 x 22,23		60	80 m/s	13300 rpm	10	322850
115 x 22,23		80	80 m/s	13300 rpm	10	322851
125 x 22,23		40	80 m/s	12200 rpm	10	322852
125 x 22,23		60	80 m/s	12200 rpm	10	322853
125 x 22,23		80	80 m/s	12200 rpm	10	322854

CEVOLUTION

Abrasive mop disc, multibond, CEVOLUTION

SMT 976 SPECIAL CEVOLUTION



Class	SPECIAL
Aggression	■■■■■■■
Service life	■■■■■■■



Applications:	
Stainless steel	●
NF metals	○
Aluminium	○

Properties	
Grain	Ceramic aluminium oxide multibond
Backing plate	Glass fibre
Design	Convex 6°

Advantages: Newly developed abrasive for highest stock removal rates for stainless steel grinding tasks - Reduced grinding temperature due to multibond - Well suited for soft, smearing materials such as non-ferrous metals and aluminium - The SMT 976 includes the new CEVOLUTION technology. CEVOLUTION stands for holistically optimized, ceramic abrasives. Klingspor products with CEVOLUTION technology contain, among others, an optimized grit mix, grit sizes and formulation in order to offer the maximum performance in every application.

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Bore in mm	Form	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 22,23		40	80 m/s	13300 rpm	10	369277
115 x 22,23		60	80 m/s	13300 rpm	10	369272
115 x 22,23		80	80 m/s	13300 rpm	10	369271
125 x 22,23		40	80 m/s	12200 rpm	10	369270
125 x 22,23		60	80 m/s	12200 rpm	10	369264
125 x 22,23		80	80 m/s	12200 rpm	10	369263

Abrasive mop discs

Mini abrasive mop disc

MST 624 SUPRA



Class	SUPRA
Aggression	■■■■■□
Service life	■■■■■□

Applications:	
Steel	●
Stainless steel	●



Properties	
Grain	Zirconia alumina
Backing plate	Plastic, glass-fibre reinforced
Design	Convex 6°

Advantages: Universally usable for demanding grinding tasks in the steel and stainless steel sector - Ideal for working in hard-to-reach areas - Highly economical thanks to fast tool changes

Available grits:

Diameter in mm	Form	Grit	Thread/Shaft	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
50		40	Quick Roll Connect	80 m/s	30000 rpm	10	365094
50		60	Quick Roll Connect	80 m/s	30000 rpm	10	365147
50		80	Quick Roll Connect	80 m/s	30000 rpm	10	365148
50		120	Quick Roll Connect	80 m/s	30000 rpm	10	365149
75		40	Quick Roll Connect	80 m/s	20000 rpm	10	365150
75		60	Quick Roll Connect	80 m/s	20000 rpm	10	365151
75		80	Quick Roll Connect	80 m/s	20000 rpm	10	365152
75		120	Quick Roll Connect	80 m/s	20000 rpm	10	365153

Backing pad see page 154 (QRC 555 firm)

Mini abrasive mop disc

MST 924 SPECIAL



Class	SPECIAL
Aggression	■■■■■
Service life	■■■■■

Applications:	
Steel	●
Stainless steel	●



Properties	
Grain	Ceramic Al. oxide
Backing plate	Plastic, glass-fibre reinforced
Design	Convex 6°

Advantages: Aggressive stock removal due to self-sharpening ceramic grain - Ideal for working on hard-to-reach areas - For coarse grinding tasks on high alloy steels and stainless steel materials

Available grits:

Diameter in mm	Form	Grit	Thread/Shaft	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
50		36	Quick Roll Connect	80 m/s	30000 rpm	10	365095
50		40	Quick Roll Connect	80 m/s	30000 rpm	10	365144
50		60	Quick Roll Connect	80 m/s	30000 rpm	10	365145
50		80	Quick Roll Connect	80 m/s	30000 rpm	10	365146



Abrasive mop discs



» Continuation of MST 924 Special Mini abrasive mop disc

Diameter in mm	Form	Grit	Thread/Shaft	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
75		36	Quick Roll Connect	80 m/s	20000 rpm	10	365137
75		40	Quick Roll Connect	80 m/s	20000 rpm	10	365138
75		60	Quick Roll Connect	80 m/s	20000 rpm	10	365143
75		80	Quick Roll Connect	80 m/s	20000 rpm	10	365136

Backing pad see page 154 (QRC 555 firm)

Kronenflex® cutting-off wheels and grinding discs

	Material applications														Page
	Type	Thickness [mm]	Steel	Hardened steel	Tool steel	Stainless steel	High alloy steel	Corrosion and acidproof steels	Aluminium	Bronze	Copper	Brass	Zinc die-casting	Cast iron	
Kronenflex® cutting-off wheels 0,8 – 1,2 mm	A 980 TZ SPECIAL	0,8	●	●	●	●	●	●	●	●	●	●	●	●	214
	A 60 EXTRA	1,0	●	○	○	●	○	○	○	○	○	○	○	○	214
	A 660 R SUPRA	1,0	●	●	●	●	○	○	○	○	○	○	○	○	215
	A 60 TZ SPECIAL INOX	1,0	●	●	●	●	●	●	○	○	○	○	●	○	216
	A 960 TZ SPECIAL	1,0	●	●	●	●	●	●	○	○	○	○	●	○	216
	A 60 N SUPRA	1,0	○	○	○	○	○	○	●	●	●	●	○	○	215
	K 960 TX SPECIAL	1,0	●	●	●	●	●	●	○	○	○	○	●	●	217
	Z 960 TX SPECIAL	1,0	●	●	●	●	●	●	○	○	○	○	●	○	217
	EDGE SPECIAL	1,2	●	●	●	●	●	●	●	○	○	○	●	○	218
	A 660 R SUPRA Small cutting-off wheel	1,0–1,6	●	●	●	○	○	○	○	○	○	○	○	○	218

	Material applications														Page
	Type	Thickness [mm]	Steel	Hardened steel	Tool steel	Stainless steel	High alloy steels	Corrosion and acidproof steels	Aluminium	Bronze	Copper	Brass	Die-cast aluminium	Zinc die-casting	
Kronenflex® cutting-off wheels 1,6 – 1,9 mm	A 346 EXTRA	1,6	●	○	○	●	○	●	○	○	○	○	○	○	220
	A 646 R SUPRA	1,6–1,9	●	●	○	○	●	●							220
	A 46 TZ SPECIAL INOX	1,6–1,9	●	●	●	●	●	●	○	○	○	○		●	221
	A 946 TZ SPECIAL	1,6–1,9	●	●	●	●	●	●	●	○	○	○	○	○	222

	Material applications															Page
	Type	Thickness [mm]	Steel	Hardened steels	Tool steel	Stainless steel	High alloy steels	Corrosion and acidproof steels	Aluminium	Bronze	Copper	Brass	Zinc die-casting	Cast iron	Stone / concrete	
Kronenflex® cutting-off wheels 2,0 – 3,2 mm	A 24 EXTRA	2,0–3,2	●	○	●	○	○	○	○	○	○	○	○	○		223
	A 24 R SUPRA	2,5–3,0	●	●	●	○	○	○					○	○		224
	A 24 N SUPRA INOX	2,5–3,0	○	●	○	●	●	●	○	○	○	○				224
	A 36 R SUPRA INOX	2,0–2,5	○	○	●	●	●	●		○	○	○				225
	A 36 TZ SPECIAL INOX	2,0	○	○	●	●	●	●						○		225
	A 24 R/36 SPECIAL INOX	2,5–3,0	○	○	●	●	●	●								226
	A 24 TZ SPECIAL	2,5–3,0	○		○	●	●	●						○		226
	A 46 N SUPRA	2,5–3,0							●	●	●	●	○			227
	C 24 EXTRA	2,5–3,0													●	227

		Machines				Material applications										
Type	Thickness [mm]	Handheld machines 80m/s	Handheld machines 100m/s	Bench chop saws	Stationary < 5KW	Steel	Hardened steels	Tool steel	Stainless steel	High alloy steels	Corrosion and aacidproof steels	Aluminium	Cast iron	Stone / concrete	Asphalt	Page
Kronenflex® large cutting-off wheels	A 24 EXTRA	3,5	●			●	○	●	○	○	○		○			228
	C 24 EXTRA	3,5	●										○	●	○	228
	A 624 SX SPECIAL	3,5–4,0		●		●	●									229
	A 924 R SPECIAL	4,0		●		●	●	●	●	●	●		○			229
	A 924 SX SPECIAL	3,5–4,0		●		●	●									230
	A 330 EXTRA	2,5–3,0			●	●	○	○	○	○	○	○	○			231
	A 630 N SUPRA	2,5–3,2			●	●	○	○	○	○	○	○	○			232
	A 930 N SPECIAL	2,5–3,5			●	●	○	○	○	○	○	○	○			232
	A 24 R SUPRA	3,0–4,5			●	●	●	●	○	○	○		○			231

	Material applications															Page
	Type	Thickness [mm]	Steel	Hardened steels	Tool steel	Stainless steel	High alloy steels	Corrosion and acidproof steels	Aluminium	Bronze	Copper	Brass	Zinc die-casting	Cast iron	Stone / concrete	
Kronenflex® grinding discs	A 24 EXTRA	6,0–8,0	●	○	○	○	○	○					○	○		233
	A 24 EXTRA T	6,0–8,0	●	○	○	○	○	○						○		233
	A 24 R SUPRA	4,0–10	●	●	●	○	○	○						○		234
	A 24 R/01 SPECIAL	4,0	●	●	●	○	○	○								234
	A 24 N SUPRA	6,0–8,0	○	●	○	●	●	●								235
	A 24 R/36 SPECIAL	6,0	○	○	○	●	●	●								235
	A 46 N SUPRA	6,0–8,0							●	○	○	○	○			236
	A 46 VZ SPECIAL	2,0	○	○	●	●	●	●					○			236
	A 624 T SUPRA	6,0	●	●	●	●	○	○					○	●		237
	C 24 R SUPRA	6,0												○	●	237
	A 16 R SUPRA	55	●											○		238
	A 30 R SUPRA	55	●													238
	C 16 R SUPRA	55												○	●	239
	C 30 R SUPRA	55												○	●	239

● = main application ○ = possible applications

Kronenflex® cutting-off wheels 0,8 - 1,2 mm for angle grinders

Cutting-off wheel

A 980 TZ SPECIAL



Class	SPECIAL
Bond	■■■■■■■□
Aggression	■■■■■■■□
Service life	■■■■■■■□

Applications:	
Stainless steel	●
Steel	●
NF metals	●

Advantages: Free of iron, sulfur and chlorine - Very short cutting times - Very precise and clean cuts - Low thermal load - Minimal burr formation, minimizing finish-machining - 25 pieces delivered in the Kronenflex® box for long-lasting high-performance and moisture protection

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 0,8 x 22,23		80 m/s	13300 rpm	25	322182
125 x 0,8 x 22,23		80 m/s	12200 rpm	25	322183

Cutting-off wheel

A 60 EXTRA



Class	EXTRA
Bond	■■■■■■■□
Aggression	■■■■■■■□
Service life	■■■■■■■□

Applications:	
Stainless steel	●
Metals	●

Advantages: Minimal burr formation - Low thermal load - Very good price-performance ratio

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 1 x 22,23		80 m/s	13300 rpm	25	262936
125 x 1 x 22,23		80 m/s	12200 rpm	25	262937

Kronenflex® cutting-off wheels 0,8 - 1,2 mm for angle grinders



Cutting-off wheel

A 60 N SUPRA



Class	SUPRA										Applications:
Bond	■	■	■	■	■	■	■	■	■	■	Aluminium ●
Aggression	■	■	■	■	■	■	■	■	■	■	Steel ○
Service life	■	■	■	■	■	■	■	■	■	■	

Advantages: Special combination prevents smearing and clogging - Minimal burr formation

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 1 x 22,23		80 m/s	13300 rpm	25	264297
125 x 1 x 22,23		80 m/s	12200 rpm	25	264298

Cutting-off wheel

A 660 R SUPRA



Class	SUPRA										Applications:
Bond	■	■	■	■	■	■	■	■	■	■	Stainless steel ●
Aggression	■	■	■	■	■	■	■	■	■	■	Steel ●
Service life	■	■	■	■	■	■	■	■	■	■	

Advantages: Minimal burr formation - Low thermal load - Highest cutting performance

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 1 x 22,23		80 m/s	13300 rpm	25	328905
125 x 1 x 22,23		80 m/s	12200 rpm	25	328906

Kronenflex® cutting-off wheels 0,8 - 1,2 mm for angle grinders

Cutting-off wheel

A 60 TZ SPECIAL



Class	SPECIAL
Bond	■■■■■■■□
Aggression	■■■■■■■□
Service life	■■■■■■■□



Applications:	
Stainless steel	●
Steel	●
NF metals	○



Advantages: Free of iron, sulfur and chlorine - Short cutting times - Minimal burr formation - Low thermal load

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
100 x 1 x 16	—	80 m/s	15300 rpm	25	202402
115 x 1 x 22,23	—	80 m/s	13300 rpm	25	202400
115 x 1 x 22,23	—	80 m/s	13300 rpm	25	233741
115 x 1 x 22,23 X-LOCK	—	80 m/s	13300 rpm	25	351259
125 x 1 x 22,23	—	80 m/s	12200 rpm	25	202401
125 x 1 x 22,23	—	80 m/s	12200 rpm	25	233742
125 x 1 x 22,23 X-LOCK	—	80 m/s	12200 rpm	25	351258

Cutting-off wheel

A 960 TZ SPECIAL



Class	SPECIAL
Bond	■■■■■■■
Aggression	■■■■■■■□
Service life	■■■■■■■



Applications:	
Stainless steel	●
Steel	●

Advantages: Free of iron, sulphur and chlorine - Short cutting times and long service life - Low thermal load - Low burr formation - Optimized bonding for considerably longer service life - For diverse applications - 25 pieces delivered in the Kronenflex® box for long lasting high performance and moisture protection

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 1 x 22,23	—	80 m/s	13300 rpm	25	322180
125 x 1 x 22,23	—	80 m/s	12200 rpm	25	322181

Kronenflex® cutting-off wheels 0,8 - 1,2 mm for angle grinders




Ceramic cutting-off wheel

K 960 TX SPECIAL



Class	SPECIAL
Bond	■■■■■■■■■
Aggression	■■■■■■■■■
Service life	■■■■■■■■■



Applications:	
Steel	●
Stainless steel	●
High alloy steel	●
Carbon steel	●

CERAMIC



Advantages: Free of iron, sulfur and chlorine - Outstanding performance in daily use - Highest cutting performance, even with low grinding pressure - 25 pieces delivered in the Kronenflex® box for long lasting high performance and moisture protection


Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 1 x 22,23	— — — — —	80 m/s	13300 rpm	25	328885
125 x 1 x 22,23	— — — — —	80 m/s	12200 rpm	25	328886

Cutting-off wheel

Z 960 TX SPECIAL



Class	SPECIAL
Bond	■■■■■■■■■
Aggression	■■■■■■■■■
Service life	■■■■■■■■■



Applications:	
Stainless steel	●
Alloys	●
Carbon steel	●
Titanium	●

ZIRCONIUM



Advantages: Free of iron, sulphur and chlorine - Ideal for tough/hard materials such as titanium and high alloy steels - Short cutting times and long service life due to self-sharpening zirconia alumina - Low thermal load - Low burr formation - 25 pieces delivered in the Kronenflex® box for long lasting high performance and moisture protection

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 1 x 22,23	— — — — —	80 m/s	13300 rpm	25	322184
125 x 1 x 22,23	— — — — —	80 m/s	12200 rpm	25	322185

Kronenflex® cutting-off wheels 0,8 - 1,2 mm for angle grinders

Cutting-off wheel

EDGE SPECIAL



Class

Bond	■■■■■■■■
Aggression	■■■■■■■□
Service life	■■■■■■■■

Applications:


Stainless steel	●
Steel	●
Aluminium	●

Advantages: High-performance cutting-off wheel with self-sharpening abrasive grain - Great cutting performance combined with a long service life - Wide range of applications - Packaged in units of 25 in the Kronenflex® Box to preserve maximum performance and protect against moisture

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 1,2 x 22,23	—	80 m/s	13300 rpm	25	355380
125 x 1,2 x 22,23	—	80 m/s	12200 rpm	25	355379

Small cutting-off wheel

A 660 R SUPRA



Class

SUPRA

Bond	■■■■■■■□
Aggression	■■■■■■■□
Service life	■■■■■■■□

Applications:

Steel	●
Stainless steel	●

Advantages: Minimal burr formation - For universal use in hard-to-reach areas - For cutting tins, profiles and solid materials

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
50 x 1 x 6	—	80 m/s	30600 rpm	40	368881
76 x 1 x 6	—	80 m/s	20100 rpm	40	368880
76 x 1,6 x 6	—	80 m/s	20100 rpm	40	368878
76 x 1 x 10	—	80 m/s	20100 rpm	40	368879
76 x 1,6 x 10	—	80 m/s	20100 rpm	40	368877
100 x 1 x 10	—	80 m/s	15300 rpm	25	368876

Fixing spindle

SD 660



Advantages: Fixing spindle for clamping on the small A 660 R cutting blades onto straight grinders, flexible shafts, and drilling machines - Fits 6 and 10 mm holes

Diameter in mm	Suitable for	Packing unit/pcs.	Cat. number
6	6 and 10 mm bore	1	337156

Kronenflex® cutting-off wheels 1,6 - 1,9 mm

for angle grinders

Cutting-off wheel

A 346

EXTRA



Class	EXTRA
Bond	■ ■ ■ ■ ■ □ □
Aggression	■ ■ ■ ■ ■ □ □
Service life	■ ■ ■ ■ ■ □ □

Applications:	
Stainless steel	●
Steel	●
Aluminium	ⓘ

Advantages: Free of iron, sulphur and chlorine - Universal use on steel and stainless steel (INOX) - Cutting disc made of a calcined, cubic aluminium oxide that is self-sharpening - Minimal burr formation and longer service life - Best suited for cutting thin-walled profiles and pipes

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 1,6 x 22,23	—	80 m/s	13300 rpm	25	340936
125 x 1,6 x 22,23	—	80 m/s	12200 rpm	25	340938

Cutting-off wheel

A 646 R

SUPRA



Class	SUPRA
Bond	■ ■ ■ ■ ■ □
Aggression	■ ■ ■ ■ ■ □
Service life	■ ■ ■ ■ ■ □

Applications:	
Steel	●
Stainless steel	ⓘ

Advantages: Free of iron, sulphur and chlorine - Universal use on steel and stainless steel - Cutting disc made of self-sharpening, calcined aluminum oxide - Tremendous aggressiveness when used for cutting solid steel materials

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 1,6 x 22,23	—	80 m/s	13300 rpm	25	340947
125 x 1,6 x 22,23	—	80 m/s	12200 rpm	25	340946
150 x 1,6 x 22,23	—	80 m/s	10200 rpm	25	340945
180 x 1,6 x 22,23	—	80 m/s	8500 rpm	25	340944
230 x 1,9 x 22,23	—	80 m/s	6600 rpm	25	340943
230 x 1,9 x 22,23	—	80 m/s	6600 rpm	25	340942

Kronenflex® cutting-off wheels 1,6 - 1,9 mm for angle grinders



Cutting-off wheel

A 46 TZ SPECIAL



Class	<i>SPECIAL</i>
Bond	■■■■■□
Aggression	■■■■■□
Service life	■■■■■□



Applications:	
Stainless steel	●
Steel	●

XLOCK !

Advantages: Free of iron, sulphur and chlorine - Universal use on steel and stainless steel - First choice for professional applications and fast cutting of demanding materials

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
100 x 1,6 x 16	— —	80 m/s	15300 rpm	25	194071
115 x 1,6 x 22,23	— —	80 m/s	13300 rpm	25	187170
115 x 1,6 x 22,23	— —	80 m/s	13300 rpm	25	235378
115 x 1,6 x 22,23 X-LOCK	— —	80 m/s	13300 rpm	25	351257
125 x 1,6 x 22,23	— —	80 m/s	12200 rpm	25	187171
125 x 1,6 x 22,23	— —	80 m/s	12200 rpm	25	235379
125 x 1,6 x 22,23 X-LOCK	— —	80 m/s	12200 rpm	25	351256
150 x 1,6 x 22,23	— —	80 m/s	10200 rpm	25	241472
180 x 1,6 x 22,23	— —	80 m/s	8500 rpm	25	221161
180 x 1,6 x 22,23	— —	80 m/s	8500 rpm	25	312257
230 x 1,9 x 22,23	— —	80 m/s	6600 rpm	25	224084
230 x 1,9 x 22,23	— —	80 m/s	6600 rpm	25	265044

Kronenflex® cutting-off wheels 1,6 - 1,9 mm


for angle grinders

Cutting-off wheel

A 946 TZ SPECIAL



Class	SPECIAL
Bond	■■■■■■■■■
Aggression	■■■■■■■■■
Service life	■■■■■■■□



Applications:	
Steel	●
Stainless steel	●
NF metals	○
Castings	○

Advantages: Free of iron, sulfur and chlorine - Extra long service life across all applications - For universal use in metal processing - Short cutting times - Low burr formation - Low thermal load - 25 pieces delivered in the Kronenflex® box for long lasting high performance and moisture protection

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 1,6 x 22,23	— —	80 m/s	13300 rpm	25	339109
125 x 1,6 x 22,23	— —	80 m/s	12200 rpm	25	339110
150 x 1,6 x 22,23	— —	80 m/s	10200 rpm	25	339111
180 x 1,6 x 22,23	— —	80 m/s	8500 rpm	25	339112
230 x 1,9 x 22,23	— —	80 m/s	6600 rpm	25	339113
230 x 1,9 x 22,23	— —	80 m/s	6600 rpm	25	339114

Wheel flange

FL 76



Advantages: Use of the wheel flange increases lateral stability with thin cutting-off wheels having a flat form and diameters of 180 and 230 mm

Two-piece set

Diameter in mm	Suitable for	Packing unit/pcs.	Cat. number
76	A 46 TZ + A 646 R + A 946 TZ	1 Set	236130

Kronenflex® cutting-off wheels 2,0 - 3,2 mm for angle grinders



Cutting-off wheel

A 24 EXTRA



Class	EXTRA
Bond	■ ■ ■ ■ □ □ □
Aggression	■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ □ □ □

Applications:	
Metals	●

XLOCK !

Advantages: Proven a million times over - Standard wheel with outstanding price-performance ratio - For universal use in metalworking - Fast cutting off of solid material

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
100 x 2,5 x 16		80 m/s	15300 rpm	25	188998
115 x 2,5 x 22,23		80 m/s	13300 rpm	25	242137
115 x 2,5 x 22,23		80 m/s	13300 rpm	25	188461
115 x 2,5 x 22,23 X-LOCK		80 m/s	13300 rpm	25	351255
115 x 3,2 x 22,23		80 m/s	13300 rpm	25	209014
125 x 2,5 x 22,23		80 m/s	12200 rpm	25	242138
125 x 2,5 x 22,23		80 m/s	12200 rpm	25	188463
125 x 2,5 x 22,23 X-LOCK		80 m/s	12200 rpm	25	351254
125 x 3,2 x 22,23		80 m/s	12200 rpm	25	209016
150 x 2,5 x 22,23		80 m/s	10200 rpm	25	235375
150 x 2,5 x 22,23		80 m/s	10200 rpm	25	235374
180 x 2 x 22,23		80 m/s	8500 rpm	25	286455
180 x 3 x 22,23		80 m/s	8500 rpm	25	13490
180 x 3 x 22,23		80 m/s	8500 rpm	25	189000
230 x 2 x 22,23		80 m/s	6600 rpm	25	286456
230 x 3 x 22,23		80 m/s	6600 rpm	25	13492
230 x 3 x 22,23		80 m/s	6600 rpm	25	189002

Kronenflex® cutting-off wheels 2,0 - 3,2 mm for angle grinders

Cutting-off wheel

A 24 R SUPRA



Class	SUPRA		Applications:
Bond	■ ■ ■ ■ ■ □ □		Steel ●
Aggression	■ ■ ■ ■ □ □ □		Stainless steel ○
Service life	■ ■ ■ ■ □ □ □		Castings ○

Advantages: Optimized combination for use on steel - Can be used on stainless steel - Good cutting properties

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
100 x 2,5 x 16		80 m/s	15300 rpm	25	13754
115 x 2,5 x 22,23		80 m/s	13300 rpm	25	13297
115 x 2,5 x 22,23		80 m/s	13300 rpm	25	13466
125 x 2,5 x 22,23		80 m/s	12200 rpm	25	13295
125 x 2,5 x 22,23		80 m/s	12200 rpm	25	13738
150 x 2,5 x 22,23		80 m/s	10200 rpm	25	6667
180 x 3 x 22,23		80 m/s	8500 rpm	25	13456
180 x 3 x 22,23		80 m/s	8500 rpm	25	13470
230 x 3 x 22,23		80 m/s	6600 rpm	25	13464
230 x 3 x 22,23		80 m/s	6600 rpm	25	13478

Cutting-off wheel

A 24 N SUPRA



Class	SUPRA		Applications:
Bond	■ ■ ■ □ □ □ □		Stainless steel ●
Aggression	■ ■ ■ ■ □ □ □		Aluminium ○
Service life	■ ■ ■ ■ □ □ □		

Advantages: Special recipe prevents smearing and clogging - High removal rate on stainless steel due to hardened aluminium oxide

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 2,5 x 22,23		80 m/s	13300 rpm	25	3020
125 x 2,5 x 22,23		80 m/s	12200 rpm	25	2951
150 x 2,5 x 22,23		80 m/s	10200 rpm	25	235377
180 x 3 x 22,23		80 m/s	8500 rpm	25	13455
180 x 3 x 22,23		80 m/s	8500 rpm	25	13469
230 x 3 x 22,23		80 m/s	6600 rpm	25	13463
230 x 3 x 22,23		80 m/s	6600 rpm	25	13477

Kronenflex® cutting-off wheels 2,0 - 3,2 mm for angle grinders



Cutting-off wheel

A 36 R SUPRA



Class	SUPRA
Bond	■ ■ ■ ■ ■ □ □ □
Aggression	■ ■ ■ ■ ■ ■ □
Service life	■ ■ ■ ■ ■ □ □

Applications:	
Stainless steel	●

Advantages: Excellent cutting performance - Optimized aggression and service life

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 2 x 22,23	—	80 m/s	13300 rpm	25	123208
125 x 2 x 22,23	—	80 m/s	12200 rpm	25	126849
150 x 2 x 22,23	—	80 m/s	10200 rpm	25	251752
180 x 2,5 x 22,23	—	80 m/s	8500 rpm	25	123209
230 x 2,5 x 22,23	—	80 m/s	6600 rpm	25	123833

Cutting-off wheel

A 36 TZ SPECIAL



Class	SPECIAL
Bond	■ ■ ■ ■ ■ ■ □
Aggression	■ ■ ■ ■ ■ ■ ■
Service life	■ ■ ■ ■ ■ □ □

Applications:	
Stainless steel	●
Steel	①

Advantages: Very good cutting performance, even with low grinding pressure

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 2 x 22,23	—	80 m/s	13300 rpm	25	136549
125 x 2 x 22,23	—	80 m/s	12200 rpm	25	136550
180 x 2 x 22,23	—	80 m/s	8500 rpm	25	136551
230 x 2 x 22,23	—	80 m/s	6600 rpm	25	136552

Kronenflex® cutting-off wheels 2,0 - 3,2 mm for angle grinders

Cutting-off wheel

A 24 TZ SPECIAL



Class	SPECIAL
Bond	■ ■ ■ ■ ■ □ □
Aggression	■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ ■ □ □

Applications:	
Stainless steel	●
Steel	○
Castings	○

Advantages: Optimized combination for use on stainless steel - Excellent performance

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 2,5 x 22,23		80 m/s	13300 rpm	25	136554
125 x 2,5 x 22,23		80 m/s	12200 rpm	25	136555
180 x 3 x 22,23		80 m/s	8500 rpm	25	136558
230 x 3 x 22,23		80 m/s	6600 rpm	25	136559

Cutting-off wheel

A 24 R/36 SPECIAL



Class	SPECIAL
Bond	■ ■ ■ ■ □ □ □
Aggression	■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ □ □ □

Applications:	
Stainless steel	●

Advantages: Special wheel for the nuclear industry - Free of iron, sulphur and chlorine

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 2,5 x 22,23		80 m/s	13300 rpm	25	60534
125 x 2,5 x 22,23		80 m/s	12200 rpm	25	2825
180 x 3 x 22,23		80 m/s	8500 rpm	25	60537
230 x 3 x 22,23		80 m/s	6600 rpm	25	60061

Kronenflex® cutting-off wheels 2,0 - 3,2 mm for angle grinders



Cutting-off wheel

A 46 N SUPRA



Class	SUPRA
Bond	■ ■ ■ ■ □ □ □ □
Aggression	■ ■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ ■ □ □ □

Applications:
Aluminium ●

Advantages: Special combination prevents smearing and clogging - Optimized cutting off performance on non-ferrous metals

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 2,5 x 22,23		80 m/s	13300 rpm	25	170707
125 x 2,5 x 22,23		80 m/s	12200 rpm	25	170708
180 x 3 x 22,23		80 m/s	8500 rpm	25	170709
230 x 3 x 22,23		80 m/s	6600 rpm	25	170710

Cutting-off wheel

C 24 EXTRA



Class	EXTRA
Bond	■ ■ ■ ■ □ □ □ □
Aggression	■ ■ ■ ■ □ □ □ □
Service life	■ ■ ■ ■ □ □ □ □

Applications:
Stone/Concrete ●

Advantages: Universal cutting-off wheel for all mineral materials - Wide application range due to sharp, coarse SiC grit

SILICON CARBIDE !

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
100 x 2,5 x 16		80 m/s	15300 rpm	25	188999
115 x 2,5 x 22,23		80 m/s	13300 rpm	25	242143
115 x 2,5 x 22,23		80 m/s	13300 rpm	25	188462
125 x 2,5 x 22,23		80 m/s	12200 rpm	25	242144
125 x 2,5 x 22,23		80 m/s	12200 rpm	25	188464
180 x 3 x 22,23		80 m/s	8500 rpm	25	13489
230 x 3 x 22,23		80 m/s	6600 rpm	25	13491
230 x 3 x 22,23		80 m/s	6600 rpm	25	189003

Kronenflex® large cutting-off wheels

for petrol driven saw / cutter

Cutting-off wheel

A 24 EXTRA



Class	EXTRA
Bond	■ ■ ■ ■ □ □ □
Aggression	■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ □ □ □

Applications:
Metals ●

Advantages: Standard wheel with outstanding price-performance ratio - For universal use in metalworking - For use on gas powered freehand machines with a cutting speed of 80 m/s

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
300 x 3,5 x 20	—	80 m/s	5100 rpm	10	288221
300 x 3,5 x 22,23	—	80 m/s	5100 rpm	10	288222

Cutting-off wheel

C 24 EXTRA



Class	EXTRA
Bond	■ ■ ■ ■ □ □ □
Aggression	■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ □ □ □

Applications:
Stone/Concrete ●

Advantages: Optimal for all mineral materials due to sharp, coarse SiC grit - For use on gas powered freehand machines with a cutting speed of 80 m/s

SILICON CARBIDE



Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
300 x 3,5 x 20	—	80 m/s	5100 rpm	10	288223
300 x 3,5 x 22,23	—	80 m/s	5100 rpm	10	288224

Kronenflex® large cutting-off wheels

for petrol driven saw / cutter with clamping device



Cutting-off wheel

A 924 R SPECIAL



Class	<i>SPECIAL</i>
Bond	■ ■ ■ ■ ■ ■ ■ ■
Aggression	■ ■ ■ ■ ■ ■ ■ ■
Service life	■ ■ ■ ■ ■ ■ ■ ■

Applications:	
Steel	●
Stainless steel	○

Advantages: Optimised bond for use on steel, also can be used on stainless steel - For use on gas powered free-hand machines with a cutting speed of 100m/s - Free-hand cutting of pipes, rods, profiles and solid materials

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
305 x 4 x 20	—	100 m/s	6400 rpm	10	354419
305 x 4 x 22,23	—	100 m/s	6400 rpm	10	354418
305 x 4 x 25,4	—	100 m/s	6400 rpm	10	354417
356 x 4 x 20	—	100 m/s	5500 rpm	10	354416
356 x 4 x 22,23	—	100 m/s	5500 rpm	10	354415
356 x 4 x 25,4	—	100 m/s	5500 rpm	10	354414
406 x 4,5 x 20	—	100 m/s	4800 rpm	10	384980
406 x 4,5 x 25,4	—	100 m/s	4800 rpm	10	369735

Cutting-off wheel

A 624 SX SUPRA



Class	<i>SUPRA</i>
Bond	■ ■ ■ ■ ■ ■ ■ ■
Aggression	■ ■ ■ ■ ■ ■ ■ ■
Service life	■ ■ ■ ■ ■ ■ ■ ■



Applications:	
Steel	●

Advantages: For universal use on all rail types - Top performing product for lower powered machines (<5kW) and hard rails - Fast cutting, due to softer bond - For use on gas powered cutting-off machines with a cutting speed of 100 m/s and clamping device

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
305 x 3,5 x 22,23	—	100 m/s	6400 rpm	10	353111
356 x 4 x 22,23	—	100 m/s	5500 rpm	10	351433
356 x 4 x 25,4	—	100 m/s	5500 rpm	10	340641
406 x 4 x 25,4	—	100 m/s	4800 rpm	10	351436

Kronenflex® large cutting-off wheels

for petrol driven saw / cutter with clamping device


Cutting-off wheel

A 924 SX

SPECIAL



Class	<i>SPECIAL</i>
Bond	■■■■■■■□
Aggression	■■■■■■■■■
Service life	■■■■■■■■■



Applications:

Steel	●
-------	---

Advantages: For universal use on all rail types - Top performing product for high powered machines (>5kW) and hard rails - For use on gas powered cutting-off machines with a cutting speed of 100 m/s and clamping device - Excellent service life

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
305 x 3,5 x 22,23	—	100 m/s	6400 rpm	10	353093
356 x 4 x 22,23	—	100 m/s	5500 rpm	10	352325
356 x 4 x 25,4	—	100 m/s	5500 rpm	10	353097
406 x 4 x 25,4	—	100 m/s	4800 rpm	10	352324

Kronenflex® large cutting-off wheels

for stationary cutting / chop saws



Cutting-off wheel

A 24 R SUPRA



Class SUPRA

Bond	■ ■ ■ ■ ■ ■ ■ ■
Aggression	■ ■ ■ ■ ■ ■ ■ ■
Service life	■ ■ ■ ■ ■ ■ ■ ■

Applications:

Steel	●
Stainless steel	ⓘ
Castings	ⓘ

Advantages: Optimized combination for use on steel - Can be used on stainless steel - Good cutting properties - Optimal for stationary 3 - 5 kW cutting-off machine

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
250 x 3 x 32	—	100 m/s	7600 rpm	10	2465
300 x 3 x 22,23	—	100 m/s	6400 rpm	10	71365
300 x 3 x 25,4	—	100 m/s	6400 rpm	10	6793
300 x 3 x 30	—	100 m/s	6400 rpm	10	13524
300 x 3 x 32	—	100 m/s	6400 rpm	10	6807
350 x 3,5 x 25,4	—	100 m/s	5500 rpm	10	13528
350 x 3,5 x 32	—	100 m/s	5500 rpm	10	13536
400 x 4,5 x 25,4	—	100 m/s	4800 rpm	10	292933
400 x 4,5 x 32	—	100 m/s	4800 rpm	10	292932
400 x 4,5 x 40	—	100 m/s	4800 rpm	10	296567

Cutting-off wheel

A 330 EXTRA



Class EXTRA

Bond	■ ■ ■ ■ ■ ■ ■ ■
Aggression	■ ■ ■ ■ ■ ■ ■ ■
Service life	■ ■ ■ ■ ■ ■ ■ ■

Applications:

Steel	●
Stainless steel	ⓘ
Aluminium	ⓘ
Castings	ⓘ

Advantages: More stability during cutting due to two glass fibre reinforcement mesh - Good cutting speed with a long service life - Recommended for various materials and different profiles - Usable on chop saws in craft and industry

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
305 x 2,5 x 25,4	—	80 m/s	5100 rpm	10	360976
356 x 2,5 x 25,4	—	80 m/s	4400 rpm	10	353326
406 x 3 x 25,4	—	80 m/s	3800 rpm	10	353329

Kronenflex® large cutting-off wheels

for chop saws

Cutting-off wheel

A 630 N

SUPRA



Class	SUPRA
Bond	■ ■ ■ ■ ■ □ □
Aggression	■ ■ ■ ■ ■ □
Service life	■ ■ ■ ■ ■ □



Applications:	
Steel	●
Stainless steel	○
Aluminium	○
Castings	○

Advantages: Aggressive model with an outstanding service life - An exceptional choice for the cutting of solid material - Bond optimized for universal use - Low thermal load - Minimum burr formation

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
300 x 2,5 x 25,4	—	80 m/s	5100 rpm	10	353325
356 x 2,5 x 25,4	—	80 m/s	4400 rpm	10	353324
406 x 3,2 x 25,4	—	80 m/s	3800 rpm	10	353328

Cutting-off wheel

A 930 N

SPECIAL



Class	SPECIAL
Bond	■ ■ ■ ■ ■ □
Aggression	■ ■ ■ ■ ■ ■
Service life	■ ■ ■ ■ ■ ■



Applications:	
Steel	●
Stainless steel	○
Aluminium	○
Castings	○

Advantages: Ultimate aggression and service life for universal use (pipes, profiles, solid material) - Low thermal load and minimum burr formation due to one glass fibre reinforcement mesh - An exceptional choice for 110 volt machines and the cutting of solid material

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
300 x 2,5 x 25,4	—	80 m/s	5100 rpm	10	322627
350 x 3 x 25,4	—	80 m/s	4400 rpm	10	322628

Grinding disc

A 24 EXTRA



Class	EXTRA
Bond	■ ■ ■ ■ ■ □ □
Aggression	■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ □ □ □

Applications:	
Metals	●

XLOCK !

Advantages: Standard disc with excellent price-performance ratio - For universal use in metalworking - Excellent results on all standard angle grinders

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
100 x 6 x 16		80 m/s	15300 rpm	10	189004
115 x 6 x 22,23		80 m/s	13300 rpm	10	188465
115 x 6 x 22,23 X-LOCK		80 m/s	13300 rpm	10	351253
125 x 6 x 22,23		80 m/s	12200 rpm	10	188466
125 x 6 x 22,23 X-LOCK		80 m/s	12200 rpm	10	351252
150 x 6 x 22,23		80 m/s	10200 rpm	10	235371
180 x 6 x 22,23		80 m/s	8500 rpm	10	13444
180 x 8 x 22,23		80 m/s	8500 rpm	10	13446
230 x 6 x 22,23		80 m/s	6600 rpm	10	13447
230 x 8 x 22,23		80 m/s	6600 rpm	10	13448

Grinding disc

A 24 EXTRA T



Class	EXTRA
Bond	■ ■ ■ ■ ■ □ □
Aggression	■ ■ ■ □ □ □ □
Service life	■ ■ ■ ■ □ □ □

Applications:	
Metals	●

Advantages: Extra hard grinding disc - Optimal for edge work and for removal of stubborn burrs

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
180 x 6 x 22,23		80 m/s	8500 rpm	10	13794
180 x 8 x 22,23		80 m/s	8500 rpm	10	13445

Kronenflex® grinding discs

Grinding disc

A 24 R SUPRA



Class	SUPRA	Applications:
Bond	■ ■ ■ ■ □ □ □	Steel ●
Aggression	■ ■ ■ ■ ■ □ □	Stainless steel ○
Service life	■ ■ ■ ■ □ □ □	Castings ○

Advantages: With optimised recipe for use on steel - Also suitable for use on stainless steel - Large product range

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
100 x 4 x 16		80 m/s	15300 rpm	10	13400
100 x 6 x 16		80 m/s	15300 rpm	10	6578
115 x 4 x 22,23		80 m/s	13300 rpm	10	13746
115 x 6 x 22,23		80 m/s	13300 rpm	10	13401
125 x 4 x 22,23		80 m/s	12200 rpm	10	240831
125 x 6 x 22,23		80 m/s	12200 rpm	10	13402
150 x 6 x 22,23		80 m/s	10200 rpm	10	13403
180 x 10 x 22,23		80 m/s	8500 rpm	10	13423
180 x 4 x 22,23		80 m/s	8500 rpm	10	13408
180 x 7 x 22,23		80 m/s	8500 rpm	10	13413
180 x 8 x 22,23		80 m/s	8500 rpm	10	13418
230 x 4 x 22,23		80 m/s	6600 rpm	10	13428
230 x 6 x 22,23		80 m/s	6600 rpm	10	13433
230 x 8 x 22,23		80 m/s	6600 rpm	10	13438

Grinding disc

A 24 R/01 SPECIAL



Class	SPECIAL	Applications:
Bond	■ ■ ■ ■ □ □ □	Steel ●
Aggression	■ ■ ■ ■ ■ □ □	Stainless steel ○
Service life	■ ■ ■ □ □ □ □	

Advantages: Special disc for pipeline and tank construction - Suitable for root seams - For repair of weld seams

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
125 x 4 x 22,23		80 m/s	12200 rpm	10	130825
180 x 4 x 22,23		80 m/s	8500 rpm	10	13756

Grinding disc INOX

A 24 N SUPRA



Class	SUPRA
Bond	■ ■ ■ ■ □ □ □ □
Aggression	■ ■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ □ □ □ □

Applications:	
Stainless steel	●
Aluminium	○

Advantages: High removal rate on stainless steel - Optimal ratio between removal and wear

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 6 x 22,23		80 m/s	13300 rpm	10	2923
125 x 6 x 22,23		80 m/s	12200 rpm	10	2922
180 x 4 x 22,23		80 m/s	8500 rpm	10	13407
180 x 6 x 22,23		80 m/s	8500 rpm	10	13412
180 x 8 x 22,23		80 m/s	8500 rpm	10	13417
230 x 6 x 22,23		80 m/s	6600 rpm	10	13432

Grinding disc

A 24 R/36 SPECIAL



Class	SPECIAL
Bond	■ ■ ■ ■ □ □ □ □
Aggression	■ ■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ □ □ □ □



Applications:	
Stainless steel	●

Advantages: Special wheel for the nuclear industry - Free of iron, sulfur and chlorine - Optimal ratio between removal and wear

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 6 x 22,23		80 m/s	13300 rpm	10	2488
125 x 6 x 22,23		80 m/s	12200 rpm	10	2830
180 x 6 x 22,23		80 m/s	8500 rpm	10	2463

Kronenflex® grinding discs

Grinding disc

A 46 N SUPRA



Class	SUPRA
Bond	■ ■ ■ ■ □ □ □ □
Aggression	■ ■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ □ □ □ □

Applications:	
Aluminium	●
NF metals	○

Advantages: No clogging when used on non-ferrous metals - Optimal ratio between removal and wear

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 6 x 22,23		80 m/s	13300 rpm	10	6622
125 x 6 x 22,23		80 m/s	12200 rpm	10	2226
180 x 6 x 22,23		80 m/s	8500 rpm	10	13410
180 x 8 x 22,23		80 m/s	8500 rpm	10	13415

Thin cutting-off wheel & grinding disc

A 46 VZ SPECIAL



Class	SPECIAL
Bond	■ ■ ■ ■ ■ □
Aggression	■ ■ ■ ■ ■ □
Service life	■ ■ ■ ■ ■ □

Applications:	
Stainless steel	●
Steel	●
NF metals	○

Advantages: Long service life - Multi-purpose: cutting off and light rough grinding with one wheel - High aggressiveness in cutting - No change of wheel necessary

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 2 x 22,23		80 m/s	13300 rpm	25	298176
125 x 2 x 22,23		80 m/s	12200 rpm	25	298177

Grinding disc

A 624 T SUPRA



Class	SUPRA	Applications:
Bond	■ ■ ■ ■ ■ ■ ■ ■	Steel ●
Aggression	■ ■ ■ ■ ■ ■ ■ ■	Stainless steel ●
Service life	■ ■ ■ ■ ■ ■ ■ ■	Castings ●

Advantages: Special recipe for use on various materials - Optimal ratio between removal and wear

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 6 x 22,23		80 m/s	13300 rpm	10	325215
125 x 6 x 22,23		80 m/s	12200 rpm	10	325216
180 x 6 x 22,23		80 m/s	8500 rpm	10	325217
230 x 6 x 22,23		80 m/s	6600 rpm	10	325218

Grinding disc

C 24 R SUPRA



Class	SUPRA	Applications:
Bond	■ ■ ■ ■ ■ ■ ■ ■	Stone/Concrete ●
Aggression	■ ■ ■ ■ ■ ■ ■ ■	Castings ○
Service life	■ ■ ■ ■ ■ ■ ■ ■	

Advantages: Ideal for use on stone and mineral materials - High removal rate due to sharp, coarse SiC grain

SILICON CARBIDE !

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 6 x 22,23		80 m/s	13300 rpm	10	6664
125 x 6 x 22,23		80 m/s	12200 rpm	10	6665
180 x 6 x 22,23		80 m/s	8500 rpm	10	13409

Kronenflex® cup grinding wheels

Cup grinding wheel

A 16 R

SUPRA



Class	SUPRA
Bond	■ ■ ■ ■ □ □ □
Aggression	■ ■ ■ ■ □ □ □
Service life	■ ■ ■ □ □ □ □

Applications:	
Steel	●
Castings	○

Advantages: For surface grinding and finish grinding of weld seams - Coarse grain for optimized aggressiveness

Diameter x Height x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
110 x 55 x 22,23		50 m/s	8600 rpm	6	13729

Cup grinding wheel

A 30 R

SUPRA



Class	SUPRA
Bond	■ ■ ■ ■ □ □ □
Aggression	■ ■ ■ ■ □ □ □
Service life	■ ■ ■ □ □ □ □

Applications:	
Steel	●

Advantages: For surface grinding and finish grinding of weld seams - Optimized aggressiveness and long service life

Diameter x Height x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
110 x 55 x 22,23		50 m/s	8600 rpm	6	13728

Cup grinding wheels may only be used on angle grinders diameter 180mm with cup grinding wheel protection!

Cup grinding wheel

C 16 R SUPRA



Class	SUPRA
Bond	■ ■ ■ ■ □ □ □
Aggression	■ ■ ■ ■ □ □ □
Service life	■ ■ ■ □ □ □ □

Applications:	
Stone/Concrete	●
Castings	①

Advantages: For use on surfaces and edges - For stone and mineral materials - Optimized aggressiveness due to sharp, coarse SiC grain

Diameter x Height x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
110 x 55 x 22,23		50 m/s	8600 rpm	6	13727

Cup grinding wheel

C 30 R SUPRA



Class	SUPRA
Bond	■ ■ ■ ■ □ □ □
Aggression	■ ■ ■ ■ □ □ □
Service life	■ ■ ■ □ □ □ □

Applications:	
Stone/Concrete	●
Castings	①

Advantages: For use on surfaces and edges - Ideal for stone and mineral materials due to sharp, coarse SiC grain

Diameter x Height x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
110 x 55 x 22,23		50 m/s	8600 rpm	6	13726

Cup grinding wheels may only be used on angle grinders diameter 180mm with cup grinding wheel protection!

Diamond tools

Product	Machine	Application - Material	SPECIAL	SUPRA	EXTRA	Page
Diamond cutting blades Ø 100 - 230 mm	Angle grinder	Universal	<i>DT 900 U</i>	<i>DT 600 U</i>	<i>DT 300 U</i>	241-245
			<i>DT 900 UT</i>	<i>DT 612 UT</i>	<i>DT 350 U</i>	
				<i>DT 650 UD</i>	<i>DT 300 UT</i>	
		Concrete	<i>DT 900 B</i>		<i>DT 310 UT</i>	245-246
					<i>DT 350 B</i>	
		Granite		<i>DT 600 GU</i>	<i>DT 350 BT</i>	247
		Tiles	<i>DT 900 FL</i>	<i>DT 600 F</i>	<i>DT 300 F</i>	247-249
			<i>DT 900 FT</i> <i>DT 900 FP</i>			
Cup grinding wheels	Angle grinder	Mortar joints		<i>DN 600 U</i>	<i>DN 300 U</i>	251
		All Cut Metal		<i>DT 600 ACM</i>		250
		All Cut Rescue	<i>DT 900 ACR</i>			250
		Concrete		<i>DS 600 B</i>	<i>DS 300 B</i>	252-253
				<i>DS 600 S</i>		
Diamond cutting blades Ø 250 - 500 mm	Petrol powered cutter, Table saw, Joint cutter	Lime sandstone, screed and abrasive materials		<i>DS 600 A</i>		253
		Epoxy resin, tile adhesive			<i>DZ 114</i>	255
		Adaptor M14	<i>DS 900 PKD</i>	<i>DS 650 PKD</i>		254
		Universal	<i>DT 900 U</i>	<i>DT 600 U</i>	<i>DT 300 U</i>	256-260
			<i>DT 900 US</i>	<i>DT 612 UT</i>	<i>DT 310 UT</i>	
			<i>DT 900 UX</i>		<i>DT 350 U</i>	
		Granite	<i>DT 900 G</i>			261
		Tiles	<i>DT 900 FL</i>	<i>DT 600 F</i>		261-262
		All Cut Rescue	<i>DT 900 ACR</i>			262
		Clinker		<i>DT 600 KM</i>		263
				<i>DT 600 KMS</i>		
		Asphalt	<i>DT 902 A</i>	<i>DT 602 A</i>	<i>DT 350 A</i>	264-265
		Asphalt / concrete		<i>DT 612 A</i>		
				<i>DT 612 AB</i>	<i>DT 350 AB</i>	266
		Concrete	<i>DT 900 B</i>	<i>DT 602 B</i>	<i>DT 350 B</i>	267-269
			<i>DT 900 BX</i>		<i>DT 350 BT</i>	
Drill bits	Drill stand	Concrete	<i>DR 912 B</i>	<i>DK 612 B</i>		271-273
				<i>DK 654 B</i>		
	Percussion drill	Concrete		<i>DD 600 U</i>		274
		Adaptor kit			<i>ADS 200</i>	274
	Drilling machine	Tiles		<i>DB 600 F</i>		275
	Angle grinder	Tiles		<i>DK 600 F</i>		276
		Hole starting aid			<i>ABH 80</i>	277

Diamond cutting blades for angle grinders



Diamond cutting blade

DT 300 U EXTRA



Properties

Design	Sintered
Segmentation	Standard
Aggression	■■■■□□□□
Service life	■■■■□□□□



Applications:

Construction materials	●
Concrete, universal	●

Advantages: Product for universal use on general construction materials - Excellent cutting performance - Great price-performance ratio

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
115 x 22,23	80 m/s	13300 rpm	8 / 37,3 / 1,6 / 7	1	325345
125 x 22,23	80 m/s	12200 rpm	9 / 36,4 / 1,6 / 7	1	325346
180 x 22,23	80 m/s	8500 rpm	13 / 38,1 / 2 / 7	1	325347
230 x 22,23	80 m/s	6600 rpm	16 / 40,2 / 2,3 / 7	1	325348

Diamond cutting blade

DT 350 U EXTRA



Properties

Design	Laser welded
Segmentation	Standard
Aggression	■■■■■□□□
Service life	■■■■■□□□



Applications:

Construction materials	●
Concrete, universal	●

Advantages: Product with laser-welded standard segments for universal use on general construction material - Smooth, fast and low-vibration cutting with unmatched service life - Optimum price-performance ratio

XLOCK !

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
115 x 22,23	80 m/s	13300 rpm	8 / 33 / 2,4 / 10	1	336214
115 x 22,23 X-LOCK	80 m/s	13300 rpm	8 / 33 / 2,4 / 10	1	350463
125 x 22,23	80 m/s	12200 rpm	9 / 33 / 2,4 / 10	1	336215
125 x 22,23 X-LOCK	80 m/s	12200 rpm	9 / 33 / 2,4 / 10	1	350464
150 x 22,23	80 m/s	10200 rpm	11 / 33 / 2,4 / 10	1	336260
180 x 22,23	80 m/s	8500 rpm	11 / 42 / 2,6 / 10	1	336216
230 x 22,23	80 m/s	6600 rpm	15 / 42 / 2,6 / 10	1	336219

Diamond cutting blades for angle grinders

Diamond cutting blade

DT 600 U SUPRA



Properties

Design	Laser welded
Segmentation	Short segments
Aggression	■■■■■□□
Service life	■■■■■□□□



Applications:

Construction materials	●
Concrete, universal	●
Cured concrete, reinforced	●
Chalky sandstone	●



Advantages: Suitable for a various range of applications - First-rate cutting performance - Exceptional service life thanks to the use of premium grade raw materials and diamonds - Clean cutting edges

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
100 x 16	80 m/s	15300 rpm	11 / 20 / 2,4 / 9	1	325025
115 x 22,23	80 m/s	13300 rpm	13 / 20 / 2,4 / 9	1	322630
115 x 22,23 X-LOCK	80 m/s	13300 rpm	13 / 20 / 2,4 / 9	1	350461
125 x 22,23	80 m/s	12200 rpm	15 / 20 / 2,4 / 9	1	322631
125 x 22,23 X-LOCK	80 m/s	12200 rpm	15 / 20 / 2,4 / 9	1	350462
140 x 22,23	80 m/s	10900 rpm	17 / 20 / 2,4 / 9	1	325046
150 x 22,23	80 m/s	10200 rpm	18 / 20 / 2,4 / 9	1	322632
180 x 22,23	80 m/s	8500 rpm	22 / 20 / 2,6 / 9	1	322633
230 x 22,23	80 m/s	6600 rpm	30 / 20 / 2,6 / 9	1	322634

Diamond cutting blade

DT 612 UT SUPRA



Properties

Design	Laser welded
Segmentation	Turbo
Aggression	■■■■■□□□
Service life	■■■■■□□□



Applications:

Construction materials	●
Concrete, universal	●
Cured concrete, reinforced	●
Chalky sandstone	●

Advantages: Special turbo segments for an extremely high cutting speed on almost all hard materials - Excellent service life even on reinforced concrete

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
115 x 22,23	80 m/s	13300 rpm	8 / 33 / 2,4 / 12	1	334044
125 x 22,23	80 m/s	12200 rpm	9 / 33 / 2,4 / 12	1	334045
125 x 22,23	80 m/s	12200 rpm	10 / 31 / 2,2 / 12	1	383486
150 x 22,23	80 m/s	10200 rpm	11 / 33 / 2,4 / 12	1	345388
180 x 22,23	80 m/s	8500 rpm	11 / 42 / 2,6 / 12	1	334046
230 x 22,23	80 m/s	6600 rpm	15 / 42 / 2,6 / 12	1	334047
230 x 22,23	80 m/s	6600 rpm	16 / 38 / 2,4 / 12	1	383487

Diamond cutting blades for angle grinders



Diamond cutting blade

DT 650 UD SUPRA



Properties

Design	Laser welded
Segmentation	Turbo
Aggression	■ ■ ■ ■ ■ □ □
Service life	■ ■ ■ ■ ■ □ □



Applications:

Construction materials	●
Cured concrete, reinforced	●
Concrete, universal	●
Chalky sandstone	●

Hard stone	●
------------	---

Advantages: Ultra fast cutting speed thanks to specially designed turbo segments - Low vibration detenso core for efficient noise reduction - Suitable for use on almost any hard material

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
230 x 22,23	80 m/s	6600 rpm	15 / 42 / 2,6 / 12	1	334061

Diamond cutting blade

DT 900 U SPECIAL



Properties

Design	Laser welded
Segmentation	Turbo
Aggression	■ ■ ■ ■ ■ ■ ■
Service life	■ ■ ■ ■ ■ ■ ■



Applications:

Construction materials	●
Concrete, universal	●
Cured concrete, reinforced	●
Chalky sandstone	●

Hard stone	●
------------	---

Advantages: Ultra fast cutting speed on almost any hard material thanks to specially designed turbo segments - Further increased service life thanks to titanium-coated diamonds even on reinforced concrete

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
115 x 22,23	80 m/s	13300 rpm	8 / 33 / 2,4 / 12	1	325206
125 x 22,23	80 m/s	12200 rpm	9 / 33 / 2,4 / 12	1	325209
180 x 22,23	80 m/s	8500 rpm	11 / 42 / 2,6 / 12	1	325028
230 x 22,23	80 m/s	6600 rpm	15 / 42 / 2,6 / 12	1	325045

Diamond cutting blades for angle grinders

Diamond cutting blade

DT 300 UT EXTRA



Properties

Design	Sintered
Segmentation	Turbo continuous rim
Aggression	■■■■□□□
Service life	■■■■□□□



Applications:

Construction materials	●
Concrete, universal	●
Roof tiles	●

Advantages: Suitable for a various range of applications - Excellent cutting performance - Great price-performance ratio - Turbo segments for clean and nick-free edges - Ideal for roofers

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
100 x 16 / 22,23	80 m/s	15300 rpm	CR / CR / 1,9 / 7	1	330625
115 x 22,23	80 m/s	13300 rpm	CR / CR / 1,9 / 7	1	325353
125 x 22,23	80 m/s	12200 rpm	CR / CR / 1,9 / 7	1	325354
180 x 22,23	80 m/s	8500 rpm	CR / CR / 2,2 / 7	1	325355
230 x 22,23	80 m/s	6600 rpm	CR / CR / 2,5 / 7	1	325356

Diamond cutting blade

DT 310 UT EXTRA



Properties

Design	Sintered
Segmentation	Turbo continuous rim
Aggression	■■■■□□□
Service life	■■■■□□□



Applications:

Construction materials	●
Concrete, universal	●
Roof tiles	●

Advantages: All-purpose - Excellent cutting performance, great price-performance ratio - Turbo segments for clean and nick-free edges - Ideal for roofers - For cutting clay and roof tiles

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
100 x 16 / 22,23	80 m/s	15300 rpm	CR / CR / 2 / 10	1	334087
115 x 22,23	80 m/s	13300 rpm	CR / CR / 2 / 10	1	334088
125 x 22,23	80 m/s	12200 rpm	CR / CR / 2 / 10	1	334089
180 x 22,23	80 m/s	8500 rpm	CR / CR / 2,5 / 10	1	334090
230 x 22,23	80 m/s	6600 rpm	CR / CR / 2,5 / 10	1	334091

Diamond cutting blades for angle grinders



Diamond cutting blade

DT 900 UT SPECIAL



Properties

Design	Sintered
Segmentation	Turbo continuous rim
Aggression	■■■■■□
Service life	■■■■■□



Applications:

Concrete, universal	●
Construction materials	●
Roof tiles	●

Advantages: Wave-shaped steel core - Use on construction material - Clean cutting edges - High aggressiveness

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
100 x 16 / 22,23	80 m/s	15300 rpm	CR / CR / 2,2 / 10	1	330626
115 x 22,23	80 m/s	13300 rpm	CR / CR / 2,2 / 10	1	325364
125 x 22,23	80 m/s	12200 rpm	CR / CR / 2,2 / 10	1	325365
125 x 22,23	80 m/s	12200 rpm	CR / CR / 2,2 / 10	1	383485
230 x 22,23	80 m/s	6600 rpm	CR / CR / 2,5 / 10	1	325367
230 x 22,23	80 m/s	6600 rpm	CR / CR / 2,8 / 12	1	383484

Diamond cutting blade

DT 350 B EXTRA



Properties

Design	Laser welded
Segmentation	Standard
Aggression	■■■■■□
Service life	■■■■■□



Applications:

Concrete	●
Cured concrete, reinforced	①


Advantages: Diamond cutting disc with good price-performance ratio for working on concrete materials - Fast cutting with low vibration - Optimum service life

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
125 x 22,23	80 m/s	12200 rpm	9 / 33 / 2,4 / 10	1	339828
150 x 22,23	80 m/s	10200 rpm	11 / 33 / 2,4 / 10	1	345382
230 x 22,23	80 m/s	6600 rpm	15 / 42 / 2,6 / 10	1	339829

Diamond cutting blades for angle grinders

Diamond cutting blade

DT 350 BT EXTRA



Properties

Design	Laser welded
Segmentation	Turbo
Aggression	■■■■■■■□
Service life	■■■■■■■□□



Applications:

Concrete	●
Cured concrete, reinforced	⦿

Advantages: Special turbo segments for an extremely high cutting speed on concrete and all concrete products - Fast and easy cutting with low vibration - Optimum service life - Optimum price-performance ratio

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
115 x 22,23	80 m/s	13300 rpm	8 / 33 / 2,4 / 10	1	354790
125 x 22,23	80 m/s	12200 rpm	9 / 33 / 2,4 / 10	1	354791
150 x 22,23	80 m/s	10200 rpm	11 / 33 / 2,4 / 10	1	354792
180 x 22,23	80 m/s	8500 rpm	11 / 42 / 2,6 / 10	1	354793
230 x 22,23	80 m/s	6600 rpm	15 / 42 / 2,6 / 10	1	354794

Diamond cutting blade

DT 900 B SPECIAL



Properties

Design	Laser welded
Segmentation	Standard
Aggression	■■■■■■■■■
Service life	■■■■■■■■■



Applications:

Cured concrete, reinforced	●
Concrete, universal	●
Chalky sandstone	⦿
Construction materials	⦿

Advantages: Titanium-coated diamonds for first-rate cutting performance - Fast cutting speed even on reinforced concrete - Unrivalled service life - Designed for professional applications on concrete

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
115 x 22,23	80 m/s	13300 rpm	8 / 33 / 2,4 / 12	1	325205
125 x 22,23	80 m/s	12200 rpm	9 / 33 / 2,4 / 12	1	325208
180 x 22,23	80 m/s	8500 rpm	11 / 42 / 2,6 / 12	1	325027
230 x 22,23	80 m/s	6600 rpm	15 / 42 / 2,6 / 12	1	325034

Diamond cutting blades for angle grinders



Diamond cutting blade

DT 600 GU SUPRA



Properties

Design	Laser welded
Segmentation	Standard
Aggression	■ ■ ■ ■ ■ □ □
Service life	■ ■ ■ ■ ■ □ □



Applications:

Granite	●
Terrazzo	●

Advantages: High stock removal rate - Excellent service life - Clean cutting - Great price-performance ratio - Suitable for all types of granite

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
115 x 22,23	80 m/s	13300 rpm	8 / 33 / 2,4 / 10	1	336614
125 x 22,23	80 m/s	12200 rpm	9 / 33 / 2,4 / 10	1	336615
180 x 22,23	80 m/s	8500 rpm	11 / 42 / 2,6 / 10	1	336616
230 x 22,23	80 m/s	6600 rpm	15 / 42 / 2,6 / 10	1	336617

Diamond cutting blade

DT 300 F EXTRA



Properties

Design	Sintered
Segmentation	Continuous rim
Aggression	■ ■ ■ □ □ □ □
Service life	■ ■ ■ □ □ □ □



Applications:

Tiles	●
Stove tiles	●

Advantages: Clean edges when used for cutting tiles - Attractively priced quality wheel

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
100 x 16 / 22,23	80 m/s	15300 rpm	CR / CR / 1,6 / 7	1	330623
115 x 22,23	80 m/s	13300 rpm	CR / CR / 1,6 / 7	1	325357
125 x 22,23	80 m/s	12200 rpm	CR / CR / 1,6 / 7	1	325358
180 x 22,23	80 m/s	8500 rpm	CR / CR / 1,6 / 7	1	325359
200 x 25,4 / 30	80 m/s	7600 rpm	CR / CR / 1,9 / 7	1	325454
230 x 22,23	80 m/s	6600 rpm	CR / CR / 1,9 / 7	1	325360

Diamond cutting blades for angle grinders

Diamond cutting blade

DT 600 F SUPRA



Properties

Design	Sintered
Segmentation	Continuous rim
Aggression	■■■■■□□□
Service life	■■■■■□□□



Applications:

Stoneware	●
Stove tiles	●
Stove tiles, glazed	●

Advantages: Professional wheel for tiles and feldspat - For precision working - Short cutting-off times - Clean edges

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
100 x 16 / 22,23	80 m/s	15300 rpm	CR / CR / 1,6 / 7	1	330624
115 x 22,23	80 m/s	13300 rpm	CR / CR / 1,6 / 7	1	325368
125 x 22,23	80 m/s	12200 rpm	CR / CR / 1,6 / 7	1	325369
150 x 22,23	80 m/s	10200 rpm	CR / CR / 1,6 / 7	1	325370
180 x 22,23	80 m/s	8500 rpm	CR / CR / 1,6 / 7	1	325371
180 x 25,4 / 30	80 m/s	8500 rpm	CR / CR / 1,6 / 7	1	325455
200 x 25,4 / 30	80 m/s	7600 rpm	CR / CR / 1,9 / 7	1	325373
230 x 22,23	80 m/s	6600 rpm	CR / CR / 1,9 / 7	1	325372

Diamond cutting blade

DT 900 FL SPECIAL



Properties

Design	Sintered
Segmentation	Continuous rim, with laser-cut slots
Aggression	■■■■■■■□
Service life	■■■■■■■□



Applications:

Wall tiles	●	Marble	●
Floor tiles	●	Stoneware	●
Porcelain	●		
Ceramics	●		

Advantages: High-precision tool for hard wall and floor tiles - Laser-cut slots for exceptionally smooth operation and perfectly cut edges

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
115 x 22,23	80 m/s	13300 rpm	CR / CR / 1,4 / 7	1	331042
125 x 22,23	80 m/s	12200 rpm	CR / CR / 1,4 / 7	1	331043
180 x 25,4 / 30	100 m/s	10650 rpm	CR / CR / 1,6 / 7	1	331045
200 x 25,4 / 30	100 m/s	9550 rpm	CR / CR / 1,6 / 7	1	331046
230 x 22,23	80 m/s	6600 rpm	CR / CR / 1,8 / 7	1	331041
230 x 25,4 / 30	100 m/s	8350 rpm	CR / CR / 1,8 / 7	1	331048

Diamond cutting blades for angle grinders



Diamond cutting blade

DT 900 FT SPECIAL



Properties

Design	Sintered
Segmentation	Turbo continuous rim
Aggression	■■■■■■■
Service life	■■■■■■■□



Applications:

Stoneware	●
Stove tiles	●
Stove tiles, glazed	●
Granite	●

Advantages: 1,4 mm thin professional blade for extremely demanding applications - Work results of superior quality - Continuous rim with turbo segments - Clean and nick-free edges

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
100 x 16 / 22,23	80 m/s	15300 rpm	CR / CR / 1,4 / 7,5	1	330627
115 x 22,23	80 m/s	13300 rpm	CR / CR / 1,4 / 7,5	1	325392
125 x 22,23	80 m/s	12200 rpm	CR / CR / 1,4 / 7,5	1	325393
180 x 22,23	80 m/s	8500 rpm	CR / CR / 2 / 7	1	330628
230 x 22,23	80 m/s	6600 rpm	CR / CR / 2 / 7	1	330629

Diamond cutting blade

DT 900 FP SPECIAL



Properties

Design	Sintered
Segmentation	Continuous rim, with special geometry
Aggression	■■■■■■■
Service life	■■■■■■■□



Applications:

Hard floor tiles	●	Ceramics	●
Porcelain	●		
Hard wall tiles	●		
Hard fine stoneware	●		

Advantages: Extra thin disc for hard tiles and porcelain - The special geometry allows for superior cutting speeds and perfectly cut edges

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
115 x 22,23	80 m/s	13300 rpm	CR / CR / 1,4 / 10	1	331039
125 x 22,23	80 m/s	12200 rpm	CR / CR / 1,4 / 10	1	331040

Diamond cutting blades for angle grinders

Diamond cutting blade

DT 600 ACM SUPRA



Properties

Design	Vacuum-brazed
Segmentation	Standard
Aggression	■■■■■■■□
Service life	■■■■■■■□



Applications:

Steel	●	Castings	●
Stainless steel	●	Aluminium	○
Metals	●		
NF metals	●		

Advantages: Vacuum-brazed disc for almost all metallic materials - No wear behaviour as with conventional diamond cutting blades and therefore almost odourless and dirt-free - Extra thin blade for high cutting performance and aggressiveness

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
115 x 22,23	80 m/s	13300 rpm	8 / 42 / 1,3 / 1,8	1	355720
125 x 22,23	80 m/s	12200 rpm	10 / 36 / 1,3 / 1,8	1	355722
230 x 22,23	80 m/s	6600 rpm	16 / 42 / 1,6 / 1,8	1	355721

Diamond cutting blade

DT 900 ACR SPECIAL



Properties

Design	Vacuum-brazed
Segmentation	Narrow gullet
Aggression	■■■■■■■
Service life	■■■■■■■



Applications:

Construction materials	●	Plastic	●
Concrete, universal	●	Rubber	●
Glass	●	Metal	○
Wood-based materials	●		

Advantages: Vacuum-brazed diamond cutting blade for almost all materials - Very wide range of applications due to special manufacturing process - 10 mm high diamond coating for a good service life and an aggressive cut for very different and demanding materials - Ideal for rescue services

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
115 x 22,23	80 m/s	13300 rpm	8 / 56 / 2,8 / 10	1	355723
125 x 22,23	80 m/s	12200 rpm	10 / 45 / 2,8 / 10	1	355724
230 x 22,23	80 m/s	6600 rpm	16 / 56 / 3,1 / 10	1	355725

Broaching wheel

DN 300 U SUPRA



Properties

Design	Laser welded
Segmentation	Standard
Aggression	■■■■■□□
Service life	■■■■□□□

Applications:

Screed	●
Plaster	●
Aerated concrete	●

Advantages: Special broaching wheel with robust design for removing mortar - Great price-performance ratio - Specially designed hammer segments - Optimum protection of the steel core

NEW !

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Width / Height	Packing unit/pcs.	Cat. number
115 x 22,23	80 m/s	13300 rpm	9 / 32 / 6 / 7	1	666279
125 x 22,23	80 m/s	12200 rpm	10 / 32 / 6 / 7	1	666280

Broaching wheel

DN 600 U SUPRA



Properties

Design	Laser welded
Segmentation	Standard
Aggression	■■■■■□□
Service life	■■■■□□□



Applications:

Mortar joints	●
Plaster	●
Aerated concrete	●

Advantages: Special broaching wheel with robust design for removing mortar from bricks, natural stones and clinker facades - Specially designed hammer segments - Optimum protection of the steel core

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
80 x 22,23	80 m/s	19100 rpm	6 / 30 / 6 / 7	1	330630
115 x 22,23	80 m/s	13300 rpm	9 / 32 / 6 / 7	1	330631
115 x 22,23	80 m/s	13300 rpm	9 / 32 / 8 / 7	1	330658
115 x 22,23	80 m/s	13300 rpm	9 / 32 / 10 / 7	1	330663
115 x 22,23	80 m/s	13300 rpm	9 / 33 / 4,5 / 7	1	325380
125 x 22,23	80 m/s	12200 rpm	10 / 32 / 6 / 7	1	330632
125 x 22,23	80 m/s	12200 rpm	10 / 32 / 8 / 7	1	330662
125 x 22,23	80 m/s	12200 rpm	10 / 32 / 10 / 7	1	330664
125 x 22,23	80 m/s	12200 rpm	10 / 33 / 4,5 / 7	1	325381

Diamond cup grinding wheels for angle grinders

Diamond cup grinding wheel

DS 300 B EXTRA



Properties

Design	Brazed
Segmentation	Standard
Aggression	■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ □ □ □



Applications:

Concrete	●
Screed	●
Construction materials	●

Advantages: Double row cup grinding wheel with outstanding stock removal performance - High aggressiveness at low force requirements - Exceptional price-performance ratio - M14 adapter available, see DZ 114

Diameter x Bore in mm	Cup grinding wheel height in mm	Max. operating speed	Max. RPM	Segment in mm Number / Width / Height	Packing unit/pcs.	Cat. number
100 x 16 / 22,23	20	80 m/s	15300 rpm	14 / 7 / 5,5	1	330622
115 x 22,23	20	80 m/s	13300 rpm	14 / 8,2 / 5,5	1	325361
125 x 22,23	24,5	80 m/s	12200 rpm	18 / 7 / 5	1	325362
180 x 22,23	30,5	80 m/s	8500 rpm	22 / 8 / 5	1	325363

Diamond cup grinding wheel

DS 600 B SUPRA



Properties

Design	Brazed
Segmentation	Standard
Aggression	■ ■ ■ ■ ■ □ □
Service life	■ ■ ■ ■ ■ □ □



Applications:

Concrete	●
Screed	●
Construction materials	●

Advantages: Double row cup grinding wheel for machining concrete and abrasive materials - Efficient dust extraction - Aggressive grinding performance - Long service life - M14 adapter available, see DZ 114

Diameter x Bore in mm	Cup grinding wheel height in mm	Max. operating speed	Max. RPM	Segment in mm Number / Width / Height	Packing unit/pcs.	Cat. number
100 x 16 / 22,23	20	80 m/s	15300 rpm	16 / 8,5 / 5,5	1	330621
115 x 22,23	20	80 m/s	13300 rpm	16 / 8,2 / 5,5	1	325377
125 x 22,23	23,5	80 m/s	12200 rpm	20 / 7,2 / 5,5	1	325378
180 x 22,23	30,5	80 m/s	8500 rpm	24 / 8 / 5,5	1	325379

Diamond cup grinding wheels for angle grinders



Diamond cup grinding wheel

DS 600 S SUPRA



Properties

Design	Brazed
Segmentation	Standard
Aggression	■ ■ ■ ■ ■ □ □
Service life	■ ■ ■ ■ ■ □ □



Applications:

Concrete	●	Brickwork	●
Firebrick	●		
Natural stone	●		
Masonry	●		

Advantages: Excellent dust extraction thanks to specially designed (fan-shaped) opening - Low weight thanks to lightweight steel plate - Rugged performance and operation with minimum vibrations - M14 adapter available, see DZ 114

Diameter x Bore in mm	Cup grinding wheel height in mm	Max. operating speed	Max. RPM	Segment in mm Number / Width / Height	Packing unit/pcs.	Cat. number
100 x 16 / 22,23	20,5	80 m/s	15300 rpm	16 / 7,2 / 5,5	1	331022
115 x 22,23	20,5	80 m/s	13300 rpm	16 / 7,2 / 5,5	1	331023
125 x 22,23	20,5	80 m/s	12200 rpm	16 / 7,2 / 5,5	1	331024
180 x 22,23	30,5	80 m/s	8500 rpm	24 / 7,8 / 5,5	1	331025

Diamond cup grinding wheel

DS 600 A SUPRA



Properties

Design	Brazed
Segmentation	Standard
Aggression	■ ■ ■ ■ ■ □ □
Service life	■ ■ ■ ■ ■ □ □



Applications:

Asphalt	●	Sandstone	●
Abrasive materials	●		
Green concrete	●		
Aerated concrete	●		

Advantages: An ideal match with all types of abrasive materials - Outstanding grinding performance combined with a long service life - Fast and smooth grinding of surfaces thanks to double-row segments - Extended service life thanks to optimized matrix and diamonds - Simple dust extraction through openings in the steel enclosure - M14 adapter available, see DZ 114

Diameter x Bore in mm	Cup grinding wheel height in mm	Max. operating speed	Max. RPM	Segment in mm Number / Width / Height	Packing unit/pcs.	Cat. number
100 x 16 / 22,23	20	80 m/s	15300 rpm	14 / 8,2 / 5,5	1	331026
115 x 22,23	20	80 m/s	13300 rpm	14 / 8,2 / 5,5	1	331027
125 x 22,23	24,5	80 m/s	12200 rpm	18 / 7,2 / 5	1	331028
180 x 22,23	30,5	80 m/s	8500 rpm	22 / 7,8 / 5,3	1	331029

Diamond cup grinding wheels for angle grinders

Diamond cup grinding wheel

DS 650 PKD

SUPRA



Properties

Design	Brazed
Aggression	■■■■■■■□
Service life	■■■■■■■□



Applications:

Epoxy resin	●	Bitumen	●
Adhesive	●	Paint	●
Coatings	●	Glue	●
Filler	●		

Advantages: PCD (Poly Crystalline Diamonds) cup grinding wheel with good stock removal on hard resins and adhesive residues - Good dust removal - Aggressive grinding performance - Support segments for a smooth and low-vibration grinding process - M14 adapter available, see DZ 114

Diameter x Bore in mm	Cup grinding wheel height in mm	Max. operating speed	Max. RPM	Segment in mm Number / Width / Height	Packing unit/pcs.	Cat. number
125 x 22,23	21,6	80 m/s	12200 rpm	6 / 13 / 3,6	1	355953
180 x 22,23	29	80 m/s	8500 rpm	6 / 13 / 4	1	355940

Diamond cup grinding wheel

DS 900 PKD

SPECIAL



Properties

Design	Brazed
Aggression	■■■■■■■
Service life	■■■■■■■



Applications:

Adhesive	●	Bitumen	●
Epoxy resin	●	Paint	●
Filler	●	Glue	●
Coatings	●		

Advantages: Ultra-aggressive polycrystalline diamond cutting wedges enable the cup grinding wheel to remove hard and solid coatings - Support segments for a smooth and low-vibration grinding process - M14 adapter available, see DZ 114

Diameter x Bore in mm	Cup grinding wheel height in mm	Max. operating speed	Max. RPM	Segment in mm Number / Width / Height	Packing unit/pcs.	Cat. number
125 x 22,23	21	80 m/s	12200 rpm	6 / 5 / 3,5	1	355941
180 x 22,23	21,5	80 m/s	8500 rpm	8 / 5 / 3,5	1	355948



Adapter M14

DZ 114




Advantages: For retooling diamond cup grinding wheels with a Ø 22.23 mm hole to an M14 spindle size - Suitable for all Klingspor diamond cup grinding wheels

Mounting	Packing unit/pcs.	Cat. number
thread M14	1	331332

Diamond cutting blades for petrol powered cutters and table saws

Diamond cutting blade

DT 300 U EXTRA



Properties

Design	Sintered
Segmentation	Standard
Aggression	■ ■ ■ ■ □ □ □ □
Service life	■ ■ ■ ■ □ □ □ □



Applications:


Construction materials	●
------------------------	---

Advantages: Product for universal use on general construction materials - Excellent cutting performance - Great price-performance ratio

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 20	100 m/s	6400 rpm	17 / 50,1 / 2,8 / 7	1	326831
300 x 25,4	100 m/s	6400 rpm	17 / 50,1 / 2,8 / 7	1	325349
300 x 30	100 m/s	6400 rpm	17 / 50,1 / 2,8 / 7	1	325351
350 x 25,4	100 m/s	5500 rpm	20 / 50,1 / 2,8 / 7	1	325350
350 x 30	100 m/s	5500 rpm	20 / 50,1 / 2,8 / 7	1	325352

Diamond cutting blade

DT 310 UT EXTRA



Properties

Design	Sintered
Segmentation	Turbo continuous rim
Aggression	■ ■ ■ ■ □ □ □ □
Service life	■ ■ ■ ■ □ □ □ □



Applications:

Construction materials	●
Concrete, universal	●

Advantages: All-purpose - Excellent cutting performance, great price-performance ratio - Continuous rim with turbo segments for clean and nick-free edges - 10 mm tall cutting edge

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 20	100 m/s	6400 rpm	CR / CR / 3 / 10	1	334092
300 x 25,4	100 m/s	6400 rpm	CR / CR / 3 / 10	1	339121
350 x 20	100 m/s	5500 rpm	CR / CR / 3 / 10	1	334093
350 x 25,4	100 m/s	5500 rpm	CR / CR / 3 / 10	1	339123

Diamond cutting blades for petrol powered cutters, table saws and joint cutters



Diamond cutting blade

DT 350 U EXTRA



Properties

Design	Laser welded
Segmentation	Standard
Aggression	■ ■ ■ ■ ■ □ □
Service life	■ ■ ■ ■ ■ □ □



Applications:


Construction materials	●
Concrete, universal	●

Advantages: Product with laser-welded standard segments for universal use on general construction materials - Smooth, fast and low-vibration cutting with unmatched service life - Optimum price-performance ratio

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 20	100 m/s	6400 rpm	21 / 40 / 2,8 / 10	1	336223
300 x 25,4	100 m/s	6400 rpm	21 / 40 / 2,8 / 10	1	336220
350 x 20	100 m/s	5500 rpm	24 / 40 / 3 / 10	1	336224
350 x 25,4	100 m/s	5500 rpm	24 / 40 / 3 / 10	1	336221
400 x 25,4	100 m/s	4800 rpm	28 / 40 / 3,6 / 10	1	347486

Diamond cutting blade

DT 600 U SUPRA



Properties

Design	Laser welded
Segmentation	Short segments
Aggression	■ ■ ■ ■ ■ □ □
Service life	■ ■ ■ ■ □ □ □



Applications:

Construction materials	●
Concrete, universal	●
Cured concrete, reinforced	●
Chalky sandstone	●

Advantages: High cutting performance - Long service life thanks to the use of premium-grade raw materials and diamonds - Clean cutting edges - Effortless cutting thanks to short serrated segments

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 20	100 m/s	6400 rpm	32 / 24 / 2,8 / 10	1	325183
300 x 25,4	100 m/s	6400 rpm	32 / 24 / 2,8 / 10	1	325184
300 x 30	100 m/s	6400 rpm	32 / 24 / 2,8 / 10	1	325185
350 x 20	100 m/s	5500 rpm	37 / 24 / 3 / 10	1	325194
350 x 25,4	100 m/s	5500 rpm	37 / 24 / 3 / 10	1	325195
350 x 30	100 m/s	5500 rpm	37 / 24 / 3 / 10	1	325196
400 x 20	100 m/s	4800 rpm	43 / 24 / 3,6 / 10	1	347484
400 x 25,4	100 m/s	4800 rpm	43 / 24 / 3,6 / 10	1	347485
400 x 30	100 m/s	4800 rpm	43 / 24 / 3,6 / 10	1	347527



Diamond cutting blades for petrol powered cutters, table saws and joint cutters

► Continuation of DT 600 U SUPRA, Diamond cutting blade

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
450 x 25,4	100 m/s	4300 rpm	48 / 24 / 3,6 / 10	1	325201
450 x 30	100 m/s	4300 rpm	48 / 24 / 3,6 / 10	1	325200
500 x 25,4	100 m/s	3900 rpm	54 / 24 / 3,6 / 10	1	325203
500 x 30	100 m/s	3900 rpm	54 / 24 / 3,6 / 10	1	325202

Diamond cutting blade

DT 612 UT
SUPRA



Properties

Design	Laser welded
Segmentation	Turbo
Aggression	■ ■ ■ ■ □ □ □ □
Service life	■ ■ ■ ■ ■ ■ □ □

Applications:

Concrete, universal	●
Cured concrete, reinforced	●
Construction materials	●

Advantages: Special turbo segments for an extremely high cutting speed on almost all hard materials - Excellent service life even on reinforced concrete


Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 20	100 m/s	6400 rpm	20 / 40 / 2,8 / 12	1	340224
300 x 25,4	100 m/s	6400 rpm	20 / 40 / 2,8 / 12	1	340229
350 x 20	100 m/s	5500 rpm	22 / 40 / 3 / 12	1	340227
350 x 25,4	100 m/s	5500 rpm	22 / 40 / 3 / 12	1	340230
400 x 20	100 m/s	4800 rpm	26 / 40 / 3,6 / 12	1	347482
400 x 25,4	100 m/s	4800 rpm	26 / 40 / 3,6 / 12	1	347493

Diamond cutting blades for petrol powered cutters and table saws



Diamond cutting blade

DT 900 U SPECIAL



Properties

Design	Laser welded
Segmentation	Narrow/wide gullet
Aggression	■■■■■■■■
Service life	■■■■■■■■



Applications:

Construction materials	●	Granite	●
Concrete, universal	●		
Cured concrete, reinforced	●		
Chalky sandstone	●		


Advantages: Suitable for a wide range of applications - Ultra fast cutting speed - Special segment bond for long service life and clean cuts - Engineered for professional use

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segmentation	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 25,4	100 m/s	6400 rpm		18 / 40 / 2,8 / 10	1	325053
300 x 25,4	100 m/s	6400 rpm		21 / 40 / 2,8 / 10	1	325067
300 x 30	100 m/s	6400 rpm		18 / 40 / 2,8 / 10	1	325052
300 x 30	100 m/s	6400 rpm		21 / 40 / 2,8 / 10	1	325066
350 x 25,4	100 m/s	5500 rpm		21 / 40 / 3 / 10	1	325085
350 x 25,4	100 m/s	5500 rpm		24 / 40 / 3 / 10	1	325100
350 x 30	100 m/s	5500 rpm		21 / 40 / 3 / 10	1	325084
350 x 30	100 m/s	5500 rpm		24 / 40 / 3 / 10	1	325099
400 x 25,4	100 m/s	4800 rpm		28 / 40 / 3,6 / 10	1	349233
400 x 25,4	100 m/s	4800 rpm		24 / 40 / 3,6 / 10	1	349246
400 x 30	100 m/s	4800 rpm		28 / 40 / 3,6 / 10	1	349234
400 x 30	100 m/s	4800 rpm		24 / 40 / 3,6 / 10	1	349245
450 x 25,4	100 m/s	4300 rpm		26 / 40 / 3,6 / 10	1	325133
450 x 25,4	100 m/s	4300 rpm		32 / 40 / 3,6 / 10	1	325176
450 x 30	100 m/s	4300 rpm		26 / 40 / 3,6 / 10	1	325132
450 x 30	100 m/s	4300 rpm		32 / 40 / 3,6 / 10	1	325175
500 x 25,4	100 m/s	3900 rpm		36 / 40 / 3,7 / 10	1	325155
500 x 25,4	100 m/s	3900 rpm		30 / 40 / 3,7 / 10	1	325164
500 x 30	100 m/s	3900 rpm		36 / 40 / 3,7 / 10	1	325154
600 x 25,4	100 m/s	3200 rpm		36 / 40 / 3,7 / 10	1	345023

Diamond cutting blades for petrol powered cutters, table saws and joint cutters

Diamond cutting blade

DT 900 UX SPECIAL



Properties

Design	Laser welded
Segmentation	Standard
Aggression	■■■■■■■■
Service life	■■■■■■■■



Applications:

Concrete, universal	●
Construction materials	●
Cured concrete, reinforced	●

Advantages: Specially developed matrix segments with performance-optimized arrangement of the diamonds ensure a very high cutting speed and good service life - Ideally suited for almost all construction materials

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 20	100 m/s	6400 rpm	20 / 40 / 2,8 / 12	1	334048
300 x 25,4	100 m/s	6400 rpm	20 / 40 / 2,8 / 12	1	336609
350 x 20	100 m/s	5500 rpm	22 / 40 / 3 / 12	1	334049
350 x 25,4	100 m/s	5500 rpm	22 / 40 / 3 / 12	1	336610
400 x 20	100 m/s	4800 rpm	26 / 40 / 3,6 / 12	1	334050
400 x 25,4	100 m/s	4800 rpm	26 / 40 / 3,6 / 12	1	336611
450 x 25,4	100 m/s	4300 rpm	30 / 40 / 3,6 / 12	1	336612
500 x 25,4	100 m/s	3900 rpm	34 / 40 / 3,6 / 12	1	336613

Diamond cutting blade

DT 900 US SPECIAL



Properties

Design	Laser welded
Segmentation	Narrow gullet
Aggression	■■■■■■■■
Service life	■■■■■■■■



Applications:


Cured concrete, reinforced	●	Granite	●
Concrete, universal	●		
Construction materials	●		
Chalky sandstone	●		

Advantages: All-purpose high-performance tool - Extremely high cutting speed - Special segment bond for long service life and clean cuts - Engineered for professional use - Ideally suited for low-noise work environments thanks to sandwich core

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segmentation	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 25,4	100 m/s	6400 rpm	■■■■■■■■	21 / 40 / 2,8 / 10	1	334062
350 x 25,4	100 m/s	5500 rpm	■■■■■■■■	24 / 40 / 3 / 10	1	334063
350 x 30	100 m/s	5500 rpm	■■■■■■■■	24 / 40 / 3 / 10	1	336726
400 x 25,4	100 m/s	4800 rpm	■■■■■■■■	28 / 40 / 3,6 / 10	1	349238
450 x 25,4	100 m/s	4300 rpm	■■■■■■■■	32 / 40 / 3,6 / 10	1	334065
500 x 25,4	100 m/s	3900 rpm	■■■■■■■■	36 / 40 / 3,7 / 10	1	334066

Diamond cutting blade

DT 900 G SPECIAL



Properties

Design	Laser welded
Segmentation	Narrow gullet
Aggression	■■■■■■■■
Service life	■■■■■■■■

Applications:

Granite	●
Porphyry, quartzite	●
Terrazzo	●

Advantages: Aggressive and clean cut due to very closely toothed segmentation - 14 mm high segments for a long service life - Also the perfect choice for all types of granite including porphyry and quartzite

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 25,4 / 30	100 m/s	6400 rpm	20 / 40 / 2,8 / 14	1	359079
350 x 25,4 / 30	100 m/s	5500 rpm	23 / 40 / 3 / 14	1	359081
400 x 25,4 / 30	100 m/s	4800 rpm	27 / 40 / 3,6 / 14	1	359080

Diamond cutting blade

DT 600 F SUPRA



Properties

Design	Sintered
Segmentation	Continuous rim
Aggression	■■■■■■□□
Service life	■■■■■■□□

Applications:

Stoneware	●
Stove tiles	●
Stove tiles, glazed	●

Advantages: Professional wheel for tiles and feldspar - Continuous rim for clean and nick-free edges - Reduction ring from 30 mm to 25,4 mm included

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
250 x 25,4 / 30	80 m/s	6100 rpm	CR / CR / 1,9 / 7	1	325374
300 x 25,4 / 30	100 m/s	6400 rpm	CR / CR / 2 / 7	1	325375
350 x 25,4 / 30	100 m/s	5500 rpm	CR / CR / 2 / 7	1	325376

Diamond cutting blades for petrol powered cutters and table saws

Diamond cutting blade

DT 900 FL SPECIAL



Properties

Design	Sintered
Segmentation	Continuous rim, with laser-cut slots
Aggression	■■■■■■■□
Service life	■■■■■■■□



Applications:

Wall tiles	●	Marble	●
Floor tiles	●	Stoneware	●
Porcelain	●		
Ceramics	●		

Advantages: High-precision tool for hard wall and floor tiles - Laser-cut slots for exceptionally smooth operation and perfectly cut edges - Reduction ring from 30 mm to 25,4 mm included

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
250 x 25,4 / 30	100 m/s	7600 rpm	CR / CR / 2 / 7	1	331047
300 x 25,4 / 30	100 m/s	6400 rpm	CR / CR / 2,2 / 7	1	331049
350 x 25,4 / 30	100 m/s	5500 rpm	CR / CR / 2,2 / 7	1	331050

Diamond cutting blade

DT 900 ACR SPECIAL



Properties

Design	Vacuum-brazed
Segmentation	Narrow gullet
Aggression	■■■■■■■
Service life	■■■■■■■



Applications:

Construction materials	●	Plastic	●
Concrete, universal	●	Rubber	●
Glass	●	Metal	○
Wood-based materials	●		

Advantages: Vacuum-brazed diamond cutting blade for almost all materials - Very wide range of applications due to special manufacturing process - 10 mm high diamond coating for a good service life and an aggressive cut for very different and demanding materials - Ideal for rescue services

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 20	100 m/s	6400 rpm	20 / 57 / 3,1 / 6	1	355726
300 x 25,4	100 m/s	6400 rpm	20 / 57 / 3,1 / 6	1	355727
350 x 20	100 m/s	5500 rpm	24 / 53 / 3,1 / 6	1	355729
350 x 25,4	100 m/s	5500 rpm	24 / 53 / 3,1 / 6	1	355728

Diamond cutting blade

DT 600 KM SUPRA



Properties

Design	Laser welded
Segmentation	Short segments
Aggression	■ ■ ■ ■ ■ ■ □
Service life	■ ■ ■ ■ ■ ■ □



Applications:

Clinker, medium hard	●
Clinker, soft	ⓘ

Advantages: High cutting speed due to short serrated segments - Very good service life due to 15 mm high segment - Particularly suitable for medium-hard to soft clinker

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
350 x 25,4	100 m/s	5500 rpm	38 / 24 / 3 / 15	1	360934
450 x 25,4 / 60	100 m/s	4300 rpm	50 / 24 / 3,6 / 15	1	360933

Diamond cutting blade

DT 600 KMS SUPRA



Properties

Design	Laser welded
Segmentation	Short segments
Aggression	■ ■ ■ ■ ■ ■ □
Service life	■ ■ ■ ■ ■ ■ □



Applications:

Clinker, medium hard	●
Clinker, hard	ⓘ


Advantages: High cutting speed due to short serrated segments - Very good service life due to 15 mm high segment - Particularly well suited for medium-hard to soft clinker - Particularly well suited for noise-reduced work thanks to sandwich core

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
350 x 25,4	100 m/s	5500 rpm	38 / 24 / 3 / 15	1	360950
450 x 25,4 / 60	100 m/s	4300 rpm	50 / 24 / 3,6 / 15	1	360949
500 x 25,4 / 60	100 m/s	3900 rpm	56 / 24 / 3,6 / 15	1	360951

Diamond cutting blades for petrol powered cutters and joint cutters

Diamond cutting blade

DT 350 A EXTRA



Properties

Design	Laser welded
Segmentation	Wide gullet
Aggression	■ ■ ■ ■ □ □ □ □
Service life	■ ■ ■ □ □ □ □ □

Applications:


Asphalt	●
Sandstone	●

Advantages: Diamond cutting blade for general repairs with an outstanding price-performance ratio - Specially engineered for applications on asphalt - Inclined protective segments prevent the premature wearing of the welds which can lead to segment loss on standard blades

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segmentation	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 20	100 m/s	6400 rpm		18 / 40 / 2,8 / 10	1	337731
300 x 25,4	100 m/s	6400 rpm		18 / 40 / 2,8 / 10	1	337729
350 x 20	100 m/s	5500 rpm		21 / 40 / 3,2 / 10	1	337732
350 x 25,4	100 m/s	5500 rpm		21 / 40 / 3,2 / 10	1	337730
400 x 20	100 m/s	4800 rpm		24 / 40 / 3,6 / 10	1	349236
400 x 25,4	100 m/s	4800 rpm		24 / 40 / 3,6 / 10	1	349237
450 x 25,4	100 m/s	4300 rpm		28 / 40 / 3,7 / 10	1	337734
500 x 25,4	100 m/s	3900 rpm		30 / 40 / 3,7 / 10	1	337735

Diamond cutting blade

DT 602 A SUPRA



Properties

Design	Laser welded
Segmentation	Wide gullet
Aggression	■ ■ ■ ■ □ □ □ □
Service life	■ ■ ■ □ □ □ □ □

Applications:

Asphalt	●
Sandstone	●

Advantages: First-rate cutting performance - Protective segments to guard the blade - Great price-performance ratio - Specially engineered for applications on asphalt - Also suitable for use on electric joint cutters


Diameter x Bore in mm	Max. operating speed	Max. RPM	Segmentation	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 20	100 m/s	6400 rpm		18 / 40 / 2,8 / 10	1	327025
300 x 25,4	100 m/s	6400 rpm		18 / 40 / 2,8 / 10	1	325060
350 x 20	100 m/s	5500 rpm		21 / 40 / 3,2 / 10	1	327026
350 x 25,4	100 m/s	5500 rpm		21 / 40 / 3,2 / 10	1	325092
400 x 20	100 m/s	4800 rpm		24 / 40 / 3,6 / 10	1	349228
400 x 25,4	100 m/s	4800 rpm		24 / 40 / 3,6 / 10	1	349240
450 x 25,4	100 m/s	4300 rpm		28 / 40 / 3,7 / 10	1	325128
500 x 25,4	100 m/s	3900 rpm		30 / 40 / 3,7 / 10	1	325171

Diamond cutting blades for petrol powered cutters and joint cutters



Diamond cutting blade

DT 612 A SUPRA



Properties

Design	Laser welded
Segmentation	Wide gullet
Aggression	■ ■ ■ ■ ■ ■ □
Service life	■ ■ ■ ■ ■ □ □



Applications:

Asphalt	●
Sandstone	●

Advantages: High cutting speed combined with excellent service life - Protective segments to shield the core - Specially designed for applications on asphalt - Also suitable for use on electric joint cutters

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segmentation	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 25,4	100 m/s	6400 rpm		18 / 40 / 2,8 / 10	1	330075
350 x 25,4	100 m/s	5500 rpm		21 / 40 / 3,2 / 10	1	330076
400 x 25,4	100 m/s	4800 rpm		24 / 40 / 3,6 / 10	1	349227
450 x 25,4	100 m/s	4300 rpm		28 / 40 / 3,7 / 10	1	330078
500 x 25,4	100 m/s	3900 rpm		30 / 40 / 3,7 / 10	1	330079

Diamond cutting blade

DT 902 A SPECIAL



Properties

Design	Laser welded
Segmentation	Wide gullet
Aggression	■ ■ ■ ■ ■ ■ ■
Service life	■ ■ ■ ■ ■ ■ □



Applications:

Asphalt	●
Sandstone	●
Green concrete	●
Screed	●

Advantages: Very high cutting performance - 12 mm high segments - Protective segments to guard the blade


Diameter x Bore in mm	Max. operating speed	Max. RPM	Segmentation	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 25,4	100 m/s	6400 rpm		18 / 40 / 2,8 / 12	1	325062
350 x 25,4	100 m/s	5500 rpm		21 / 40 / 3,2 / 12	1	325094
400 x 25,4	100 m/s	4800 rpm		24 / 40 / 3,6 / 12	1	349239
450 x 25,4	100 m/s	4300 rpm		28 / 40 / 3,7 / 12	1	325130
500 x 25,4	100 m/s	3900 rpm		30 / 40 / 3,7 / 12	1	325173

Diamond cutting blades for petrol powered cutters and joint cutters

CEVOLUTION

Diamond cutting blade CEVOLUTION

DT 350 AB EXTRA



Properties

Design	Laser welded
Segmentation	Wide gullet
Aggression	■ ■ ■ ■ □ □ □ □
Service life	■ ■ ■ ■ □ □ □ □

Applications:


Asphalt	●
Concrete	●

Advantages: Multi-purpose product for all repairs on asphalt and concrete thanks to laser-welded block segments, turbo segments and slanted protective segments - Can be used on gasoline-powered cutters and joint cutters with up to 10 kW - The diamond cutting blade DT 350 AB includes the new CEVOLUTION technology. CEVOLUTION stands for holistically optimized, ceramic abrasives. Klingspor products with CEVOLUTION technology contain, among others, an optimized grit mix, grit sizes and formulation in order to offer the maximum performance in every application.

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segmentation	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 20	100 m/s	6400 rpm		18 / 40 / 2,8 / 12	1	340232
300 x 25,4	100 m/s	6400 rpm		18 / 40 / 2,8 / 12	1	340241
350 x 20	100 m/s	5500 rpm		21 / 40 / 3,2 / 12	1	340236
350 x 25,4	100 m/s	5500 rpm		21 / 40 / 3,2 / 12	1	340240
400 x 25,4	100 m/s	4800 rpm		24 / 40 / 3,6 / 12	1	349235
450 x 25,4	100 m/s	4300 rpm		28 / 40 / 3,7 / 12	1	353717

Diamond cutting blade

DT 612 AB SUPRA



Properties

Design	Laser welded
Segmentation	Wide gullet
Aggression	■ ■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ ■ □ □ □

Applications:

Asphalt	●
Concrete	●

Advantages: Suitable for asphalt and concrete - Specially engineered for use on both materials - High cutting speed - Excellent service life

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segmentation	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 20	100 m/s	6400 rpm		18 / 40 / 2,8 / 10	1	332344
300 x 25,4	100 m/s	6400 rpm		18 / 40 / 2,8 / 10	1	330080
350 x 20	100 m/s	5500 rpm		21 / 40 / 3,2 / 10	1	332345
350 x 25,4	100 m/s	5500 rpm		21 / 40 / 3,2 / 10	1	330081
400 x 20	100 m/s	4800 rpm		24 / 40 / 3,6 / 10	1	349225
400 x 25,4	100 m/s	4800 rpm		24 / 40 / 3,6 / 10	1	349226
450 x 25,4	100 m/s	4300 rpm		28 / 40 / 3,7 / 10	1	330083
500 x 25,4	100 m/s	3900 rpm		30 / 40 / 3,7 / 10	1	330084

Diamond cutting blades for petrol powered cutters, table saws and joint cutters



Diamond cutting blade

DT 350 B EXTRA



Properties

Design	Laser welded
Segmentation	Standard
Aggression	■ ■ ■ ■ ■ □ □
Service life	■ ■ ■ ■ ■ □ □

Applications:


Concrete	●
Cured concrete, reinforced	ⓘ

Advantages: Diamond cutting disc with good price-performance ratio for working on concrete and construction materials - Fast cutting with low vibration - Optimum service life

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 20	100 m/s	6400 rpm	21 / 40 / 2,8 / 10	1	352749
350 x 20	100 m/s	5500 rpm	24 / 40 / 3 / 10	1	354663
350 x 25,4	100 m/s	5500 rpm	24 / 40 / 3 / 10	1	339830
400 x 25,4	100 m/s	4800 rpm	28 / 40 / 3,6 / 10	1	351133

Diamond cutting blade

DT 350 BT EXTRA



Properties

Design	Laser welded
Segmentation	Turbo
Aggression	■ ■ ■ ■ ■ □ □
Service life	■ ■ ■ ■ ■ □ □

Applications:

Concrete	●
Cured concrete, reinforced	ⓘ

Advantages: Special turbo segments for an extremely high cutting speed on concrete and all concrete products - Fast and easy cutting with low vibration - Optimum service life - Optimum price-performance ratio

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 20	100 m/s	6400 rpm	21 / 40 / 2,8 / 10	1	354795
300 x 25,4	100 m/s	6400 rpm	21 / 40 / 2,8 / 10	1	354796
350 x 20	100 m/s	5500 rpm	24 / 40 / 3 / 10	1	354797
350 x 25,4	100 m/s	5500 rpm	24 / 40 / 3 / 10	1	354798
400 x 25,4	100 m/s	4800 rpm	28 / 40 / 3,6 / 10	1	354799

Diamond cutting blades for petrol powered cutters and joint cutters

Diamond cutting blade

DT 602 B SUPRA



Properties

Design	Laser welded
Segmentation	Wide gullet
Aggression	■ ■ ■ ■ ■ □ □
Service life	■ ■ ■ ■ □ □ □



Applications:

Cured concrete	●
Cured concrete, reinforced	●

Advantages: First-rate cutting performance - Fast cutting speed - Particularly well suited for concrete with medium reinforcement - Also suitable for use on electric joint cutters

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segmen- tation	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 25,4	100 m/s	6400 rpm		18 / 40 / 2,8 / 9	1	325056
350 x 25,4	100 m/s	5500 rpm		21 / 40 / 3,2 / 9	1	325088
400 x 25,4	100 m/s	4800 rpm		24 / 40 / 3,6 / 9	1	349242
450 x 25,4	100 m/s	4300 rpm		26 / 40 / 3,7 / 9	1	325136
500 x 25,4	100 m/s	3900 rpm		30 / 40 / 3,7 / 9	1	325167

Diamond cutting blade

DT 900 B SPECIAL



Properties

Design	Laser welded
Segmentation	Turbo
Aggression	■ ■ ■ ■ ■ ■ ■
Service life	■ ■ ■ ■ ■ ■ ■



Applications:

Cured concrete, reinforced	●
Concrete, universal	●
Construction materials	●
Chalky sandstone	ⓘ

Advantages: Titanium-coated diamonds for first-rate cutting performance - Fast cutting speed even on reinforced concrete - Unrivalled service life - Designed for professional applications on concrete

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 20	100 m/s	6400 rpm	20 / 40 / 2,8 / 12	1	325078
300 x 25,4	100 m/s	6400 rpm	20 / 40 / 2,8 / 12	1	325079
350 x 20	100 m/s	5500 rpm	22 / 40 / 3 / 12	1	325080
350 x 25,4	100 m/s	5500 rpm	22 / 40 / 3 / 12	1	325081
400 x 20	100 m/s	4800 rpm	26 / 40 / 3,6 / 12	1	347489
400 x 25,4	100 m/s	4800 rpm	26 / 40 / 3,6 / 12	1	347490

Diamond cutting blades for petrol powered cutters and joint cutters



Diamond cutting blade

DT 900 BX SPECIAL



Properties

Design	Laser welded
Segmentation	Turbo
Aggression	■■■■■■■■■
Service life	■■■■■■■■■



Applications:

Cured concrete, reinforced	●
Concrete, universal	●
Construction materials	●
Chalky sandstone	●

Advantages: High performance blade with ultra high cutting speed thanks to turbo segments - Specially engineered for effortless cutting through concrete - Further increased service life thanks to titanium-coated diamonds

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
350 x 25,4	100 m/s	5500 rpm	22 / 40 / 3 / 12	1	369574
400 x 25,4	100 m/s	4800 rpm	26 / 40 / 3,6 / 12	1	369575

Diamond cutting blade

DT 902 B SPECIAL



Properties

Design	Laser welded
Segmentation	Wide gullet
Aggression	■■■■■■■■■
Service life	■■■■■■■■□



Applications:

Cured concrete	●
Cured concrete, reinforced	●

Advantages: First-rate cutting performance - Ultra fast cutting speed - Also suitable for concrete with strong reinforcement

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segmen- tation	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 25,4	100 m/s	6400 rpm		18 / 40 / 2,8 / 11	1	325058
350 x 25,4	100 m/s	5500 rpm		21 / 40 / 3,2 / 11	1	325090
400 x 25,4	100 m/s	4800 rpm		24 / 40 / 3,6 / 11	1	349241
450 x 25,4	100 m/s	4300 rpm		26 / 40 / 3,7 / 11	1	325138
500 x 25,4	100 m/s	3900 rpm		30 / 40 / 3,7 / 11	1	325169

Reduction rings

Reduction rings

DZ 100 RR



Advantages: Reduction rings with serration for enhanced adhesion

Diameter x Width x Bore in mm	Suitable for	Packing unit/pcs.	Cat. number
22,23 x 1,2 x 15,88	Bore 22,23 mm	1	337148
22,23 x 1,2 x 20	Bore 22,23 mm	1	337282
25,4 x 2 x 20	Bore 25,4 mm	1	328933
25,4 x 2,5 x 20	Bore 25,4 mm	1	328934
25,4 x 9 x 20	Bore 25,4 mm	1	339133
25,4 x 2 x 22,23	Bore 25,4 mm	1	353265
30 x 2 x 25,4	Bore 30,00 mm	1	337344
30 x 2,5 x 25,4	Bore 30,00 mm	1	353266
30 x 2,5 x 20	Bore 30,00 mm	1	353267
30 x 2 x 22,23	Bore 30,00 mm	1	353268
30 x 2 x 20	Bore 30,00 mm	1	353269

Drill bits with R 1/2" connection



R 1/2" BSP Male drill bit

DK 612 B
SUPRA



Properties

Design	Laser welded
Segmentation	Standard
Aggression	■ ■ ■ ■ ■ ■ □
Service life	■ ■ ■ ■ ■ ■ □



Applications:

Concrete, universal	●
---------------------	---

Advantages: Drill bits for universal applications - High cutting speed and service life - Can be used on electric drilling machines - For replacement segments, see DE 600 B

Diameter in mm	Thread/Shaft	Overall length in mm	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
51	thread 1/2"	300	5 / 24 / 2,5 / 10	1	325720
56	thread 1/2"	300	5 / 24 / 2,5 / 10	1	325721
61	thread 1/2"	300	5 / 24 / 2,5 / 10	1	325722
71	thread 1/2"	300	7 / 24 / 2,5 / 10	1	325724
81	thread 1/2"	300	8 / 24 / 2,5 / 10	1	325755
91	thread 1/2"	300	8 / 24 / 2,5 / 10	1	325756
101	thread 1/2"	300	9 / 24 / 2,5 / 10	1	325757
111	thread 1/2"	300	9 / 24 / 2,5 / 10	1	325758
121	thread 1/2"	300	10 / 24 / 2,5 / 10	1	325759
131	thread 1/2"	300	10 / 24 / 2,5 / 10	1	325761
141	thread 1/2"	300	11 / 24 / 2,5 / 10	1	325762
151	thread 1/2"	300	12 / 24 / 2,5 / 10	1	325763
161	thread 1/2"	300	12 / 24 / 2,5 / 10	1	325764
171	thread 1/2"	300	12 / 24 / 2,5 / 10	1	325765
180	thread 1/2"	300	13 / 24 / 2,5 / 10	1	325766
201	thread 1/2"	300	15 / 24 / 2,5 / 10	1	325768

Drill bits with 1 1/4" UNC connection

1 1/4" UNC Female drill bit

DK 654 B

SUPRA



Properties

Design	Laser welded
Segmentation	Standard
Aggression	■■■■■■■□
Service life	■■■■■■■□



Applications:

Concrete, universal	●
---------------------	---

Advantages: Drill bits for universal applications - Very fast cutting - Long service life - Roof-shaped segments - Can be used on electric and hydraulic machines

Diameter in mm	Thread/Shank	Overall length in mm	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
52	thread 1 1/4"	450	5 / 24 / 3,5 / 11	1	325769
56	thread 1 1/4"	450	5 / 24 / 3,5 / 11	1	325770
61	thread 1 1/4"	450	5 / 24 / 3,5 / 11	1	325771
62	thread 1 1/4"	450	5 / 24 / 3,5 / 11	1	325772
66	thread 1 1/4"	450	5 / 24 / 3,5 / 11	1	325773
72	thread 1 1/4"	450	6 / 24 / 3,5 / 11	1	325774
82	thread 1 1/4"	450	7 / 24 / 3,5 / 11	1	325775
92	thread 1 1/4"	450	8 / 24 / 3,5 / 11	1	325776
102	thread 1 1/4"	450	9 / 24 / 3,5 / 11	1	325777
112	thread 1 1/4"	450	10 / 24 / 3,5 / 11	1	325778
122	thread 1 1/4"	450	10 / 24 / 4 / 11	1	325779
132	thread 1 1/4"	450	10 / 24 / 4 / 11	1	325781
142	thread 1 1/4"	450	11 / 24 / 4 / 11	1	325782
152	thread 1 1/4"	450	12 / 24 / 4 / 11	1	325783
162	thread 1 1/4"	450	13 / 24 / 4 / 11	1	325784
172	thread 1 1/4"	450	13 / 24 / 4 / 11	1	325785
182	thread 1 1/4"	450	14 / 24 / 4 / 11	1	325786
202	thread 1 1/4"	450	15 / 24 / 4,5 / 11	1	325787
225	thread 1 1/4"	450	16 / 24 / 4,5 / 11	1	325788
250	thread 1 1/4"	450	17 / 24 / 4,5 / 11	1	325789
300	thread 1 1/4"	450	22 / 20 / 5 / 11	1	325790

Drill bits with ring segments, R 1/2" connection



R 1/2" BSP Male drill bit

DR 912 B
SPECIAL



Properties

Design	Laser welded
Segmentation	Standard
Aggression	■ ■ ■ ■ ■ ■ ■ ■
Service life	■ ■ ■ ■ ■ ■ ■ ■



Applications:

Concrete, universal	●
---------------------	---

Advantages: Fast cutting - Long service life on reinforced concrete - Suitable for drill stand or handheld drilling

Diameter in mm	Thread/Shaft	Overall length in mm	Segment in mm Number / Width / Height	Packing unit/pcs.	Cat. number
8	thread 1/2"	300	1 / 2 / 10	1	325791
10	thread 1/2"	300	1 / 2 / 10	1	325792
12	thread 1/2"	300	1 / 2 / 10	1	325793
14	thread 1/2"	300	1 / 2 / 10	1	325794
15	thread 1/2"	300	1 / 2,5 / 10	1	325795
16	thread 1/2"	300	1 / 2,5 / 10	1	325796
18	thread 1/2"	300	1 / 2,5 / 10	1	325797
20	thread 1/2"	300	1 / 2,5 / 10	1	325798
22	thread 1/2"	300	1 / 2,5 / 10	1	325799
24	thread 1/2"	300	1 / 2,5 / 10	1	325800
25	thread 1/2"	300	1 / 2,5 / 10	1	325801
26	thread 1/2"	300	1 / 2,5 / 10	1	325802
28	thread 1/2"	300	1 / 2,5 / 10	1	325803
30	thread 1/2"	300	1 / 2,5 / 10	1	325804
32	thread 1/2"	300	1 / 2,5 / 10	1	325805
35	thread 1/2"	300	1 / 3 / 10	1	325806
40	thread 1/2"	300	1 / 3 / 10	1	325807
42	thread 1/2"	300	1 / 3,5 / 10	1	325808
52	thread 1/2"	300	1 / 3,5 / 10	1	325811

Core cutter and adapter kit

Core cutter for switch boxes

DD 600 U SUPRA



Properties

Design	Laser welded
Edge	Segmented
Aggression	■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ ■ ■ □



Applications:

Masonry	●
Construction materials	●
Chalky sandstone	●

Advantages: For machining soft and medium-hard materials such as brick, clinker and firebrick - Hexagon mounting with center drill bit are separately available (see ADS 200)


Diameter in mm	Thread/Shaft	Max. operating speed	Max. RPM	Overall length in mm	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
68	thread M16	8 m/s	2000 rpm	70	3 / 24 / 3,5 / 7	1	325390
82	thread M16	8 m/s	1600 rpm	70	4 / 24 / 3,5 / 7	1	325391

Adapter kit

ADS 200



SDS

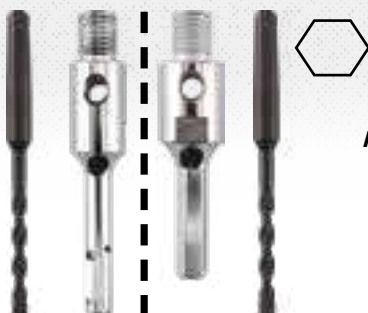

Advantages: SDS / hexagon adapter with 8 mm centre bit for article DD 600 U

Size in mm	Thread/Shaft	Suitable for	Packing unit/pcs.	Cat. number
115	SDS holding device	DD 600 U	1	236588
115	hexagonal	DD 600 U	1	236442

Diamond drill

DB 600 F SUPRA



Properties

Design	Vacuum-brazed
Edge	Closed
Aggression	■■■■■□□
Service life	■■■■■□□



Applications:

Stoneware	●
Stove tiles	●
Stove tiles, glazed	●

Advantages: Dry cutting drill bit for drilling with pinpoint accuracy on hard materials such as fine stoneware, granite floor tiles and stove tiles - Clean edges - Precise holes - No bursting, cracking, or splintering - Integrated cooling wax - No water required - Excellent price-performance ratio

Diameter in mm	Thread/Shaft	Max. RPM	Overall length in mm	Segment in mm Number / Height	Packing unit/pcs.	Cat. number
6	1/4" bit, hexagonal	3000 rpm	32	1 / 10	1	325382
8	1/4" bit, hexagonal	3000 rpm	40	1 / 10	1	325527
10	1/4" bit, hexagonal	3000 rpm	40	1 / 10	1	325383
12	1/4" bit, hexagonal	3000 rpm	40	1 / 10	1	325384
14	1/4" bit, hexagonal	3000 rpm	40	1 / 10	1	325528

Diamond drill set

DB 600 F SUPRA Set



Properties

Design	Vacuum-brazed
Edge	Closed
Aggression	■■■■■□□
Service life	■■■■■□□



Applications:

Stoneware	●
Stove tiles	●
Stove tiles, glazed	●

Properties: 7 piece diamond drill set in a Klingspor case

Contents: 2x Ø 6 mm (325382), 1x Ø 8 mm (325527), 1x Ø 10 mm (325383), 1x Ø 12 mm (325384), 1x Ø 14 mm (325528), 1x hole starting aid (313807)

Advantages: Diamond drill bits and stainless steel centring aids in a convenient and sturdy aluminium case

Size in mm	Max. RPM	Packing unit/pcs.	Cat. number
200 x 140 x 55	3000 rpm	1	331021

Dry drill bit for stoneware

Dry drill bit

DK 600 F
SUPRA



Properties

Design	Vacuum-brazed
Edge	Closed



Applications:

Stoneware	●
Tiles	●
Stove tiles	●

Advantages: Dry drill bit for all standard angle grinders - Suitable for the hardest of tiles, masonry and stoneware - Freehand centering - Precise and accurate drilling - Clean edges, precise holes - No splitting, cracking or chipping - No water needed

Diameter in mm	Thread/Shaft	Max. RPM	Overall length in mm	Segment in mm Number /Height	Packing unit/pcs.	Cat. number
6	thread M14	13300 rpm	35	1 / 10	1	330670
8	thread M14	13300 rpm	35	1 / 10	1	330671
10	thread M14	13300 rpm	35	1 / 10	1	330672
12	thread M14	13300 rpm	35	1 / 10	1	330673
14	thread M14	13300 rpm	35	1 / 10	1	330674
20	thread M14	13300 rpm	45	1 / 15	1	330675
22	thread M14	13300 rpm	45	1 / 15	1	330676
25	thread M14	13300 rpm	45	1 / 15	1	330677
26	thread M14	13300 rpm	45	1 / 15	1	325385
30	thread M14	13300 rpm	45	1 / 15	1	330678
35	thread M14	13300 rpm	45	1 / 15	1	330679
38	thread M14	13300 rpm	45	1 / 15	1	325386
40	thread M14	13300 rpm	45	1 / 15	1	330680
45	thread M14	13300 rpm	45	1 / 15	1	330681
50	thread M14	13300 rpm	45	1 / 15	1	330682
58	thread M14	13300 rpm	45	1 / 15	1	325387
65	thread M14	13300 rpm	45	1 / 15	1	325388
68	thread M14	13300 rpm	45	1 / 15	1	330683
70	thread M14	13300 rpm	45	1 / 15	1	325389
82	thread M14	13300 rpm	50	1 / 15	1	330685
112	thread M14	13300 rpm	50	1 / 15	1	330684

Dry drill bit set

DK 600 F SUPRA Set



Properties

Design	Vacuum-brazed
Edge	Closed



Applications:

Stoneware	●
Tiles	●
Stove tiles	●

Properties: 6-piece dry drill bit set in a Klingspor case

Contents: 2x Ø 6 mm (330670), 2x Ø 8 mm (330671), 1x Ø 10 mm (330672), 1x Ø 12 mm (330673)

Advantages: Dry drill bits in a convenient and sturdy aluminium case

Size in mm	Max. RPM	Packing unit/pcs.	Cat. number
110 x 130 x 100	13300 rpm	1	331076

Hole starting aid

ABH 80



Advantages: Hole starting aid for professional diamond dry drill DB 600 F

Size in mm	Suitable for	Packing unit/pcs.	Cat. number
55	DB 600 F	1	313807

Flexible abrasives

Description	Type	Material applications												Page
		Iron	Steel	Stainless steel	NF metals	Wood	Paint / Varnish	Glass / Stone	Plastic	Leather	Paper	Ceramic	Porcelain	
R-Flex	<i>RFS 651 bond E</i>			●	●									279
	<i>RFM 652 bond E</i>				●									279
	<i>RFR 654 bond Z/E</i>	●	●	●	●	●	●	●	●			●	●	281
Sandflex	<i>SFM 656 bond W</i>			●										280
	<i>SFM 656 bond T</i>			●										280
	<i>SFK 655 block</i>	●	●	●	●	●	●	●	●	●	●	●	●	280

● = main application ● = possible application

Dimensions R-Flex point RFS 651

Ø [mm]	Possible widths [mm]	Grit size	Minimum order quantities	Requested grit type / grit size
15	15, 20, 25, 30	60, 120, 240	10	from 450 pieces
20	15, 20, 25, 30	60, 120, 240	10	from 450 pieces
25	10, 15, 20, 25, 30	60, 120, 240	10	from 250 pieces
30	10, 15, 20, 25, 30	60, 120, 240	10	from 250 pieces
40	10, 15, 20, 30, 40	60, 120, 240	10	from 160 pieces
50	10, 20, 30, 40	60, 120, 240	10	from 110 pieces
60	30, 40	60, 120, 240	10	from 90 pieces

Dimensions R-Flex wheel RFR 654

Ø [mm]	Possible widths [mm]	Grit size	Minimum order quantities	Requested grit type / grit size
100	10, 15, 20, 25, 30, 35	60, 120, 240	6	from 15 pieces
125	10, 15, 20, 25, 30, 35	60, 120, 240	6	from 12 pieces
150	10, 15, 20, 25, 30, 35	60, 120, 240	6	from 6 pieces
175	15, 20, 25, 30, 35	60, 120, 240	6	from 6 pieces
200	15, 20, 25, 30, 35	60, 120, 240	6	from 6 pieces

Other grit sizes on request

Flexible abrasives

Mounted points, mottling points



R-Flex mounted points

RFS 651



Properties

Bonding agent	Plastic
Grain	SiC

Applications:

Aluminium	●
Stainless steel	●
NF metals	●

Advantages: Versatile mounted points for cleaning and finishing - Soft abrasion due to elastic structure - Can be used until completely worn down

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Height x Shaft in mm	Grit	Bonding agent	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
40 x 15 x 6	60	E	16 m/s	7650 rpm	10	14006
40 x 15 x 6	120	E	16 m/s	7650 rpm	10	14007
40 x 15 x 6	240	E	16 m/s	7650 rpm	10	14008
60 x 30 x 6	60	E	16 m/s	5000 rpm	10	14030
60 x 30 x 6	120	E	16 m/s	5000 rpm	10	14031

R-Flex mottling points

RFM 652



Properties

Bonding agent	Plastic
Grain	SiC

Applications:

Aluminium	●
NF metals	●

Advantages: Produces a satin surface scratch pattern - Soft abrasion due to elastic structure - Can be used until completely worn down - Available in two executions: with full length round shaft (standard execution, stock items) or with flattened shaft for simple and secure clamping in tool holders with clamping screw (made to order items)

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Height x Shaft in mm	Grit	Bonding agent	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
30 x 30 x 6	60	E	8 m/s	5000 rpm	10	14033
30 x 30 x 6	120	E	8 m/s	5000 rpm	10	14034
50 x 30 x 6	60	E	8 m/s	3000 rpm	10	14037
50 x 30 x 6	120	E	8 m/s	3000 rpm	10	14038

Flexible abrasives

Mottling points / Hand block

Sandflex mottling points

SFM 656



Properties

Bonding agent Plastic

Grain SiC

Applications:

Stainless steel ●

Advantages: Produces a glossy finish on stainless steel surfaces - Soft abrasion due to elastic structure - Can be used until completely worn down - Available in two executions: with flattened shaft for simple and secure clamping (standard execution, stock items) and with full length round shaft (made to order items)

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
Diameter x Height x Shaft in mm						Grit	Bonding agent	Max. operating speed			Max. RPM			Packing unit/pcs.			Cat. number									
30 x 30 x 6						60	W	5 m/s			3200 rpm			10			13856									
30 x 30 x 6						120	W	5 m/s			3200 rpm			10			13857									
40 x 30 x 6						60	W	5 m/s			2400 rpm			10			13859									
40 x 30 x 6						120	W	5 m/s			2400 rpm			10			13860									
50 x 30 x 6						60	T	5 m/s			1900 rpm			10			334993									
50 x 30 x 6						60	W	5 m/s			1900 rpm			10			13862									
50 x 30 x 6						120	W	5 m/s			1900 rpm			10			13863									
60 x 30 x 6						60	T	5 m/s			1600 rpm			10			334995									
60 x 30 x 6						60	W	5 m/s			1600 rpm			10			13865									

Hand block

SFK 655



Properties

Bonding agent Plastic

Grain SiC

Applications:

Paint/Varnish ●

Glass/Stone ●

Wood ●

Plastic ●

Leather ●

Metals ●

Advantages: Universal hand block for cleaning and finishing - Can be used on many materials - Cleaning performance is significantly increased by use of additives - Soft abrasion due to elastic structure - Can be used until completely worn down - Easy to cut to desired shape

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
Width x Length x Height in mm									Grit		Packing unit/pcs.					Cat. number										
80 x 50 x 20									30		18					13800										
80 x 50 x 20									60		18					13801										
80 x 50 x 20									120		18					13802										
80 x 50 x 20									240		18					13803										



Flexible abrasives

Hand block / R-Flex wheel



► Continuation of SFK 655 Hand block

Width x Length x Height in mm	Grit	Packing unit/pcs.	Cat. number
150 x 80 x 20	30	1	13804
150 x 80 x 20	60	1	13805
150 x 80 x 20	120	1	63231
150 x 80 x 20	240	1	13807

Hand block

SFK 655 Set



Properties

Bonding agent	Plastic
Grain	SiC

Applications:

Paint/Varnish	●	Leather	●
Glass/Stone	●	Metals	●
Wood	●		
Plastic	●		

Advantages: Universal hand block for cleaning and finishing - Can be used on many materials - Cleaning performance is significantly increased by use of additives - Soft abrasion due to elastic structure - Can be used until completely worn down - Easy to cut to desired shape

Contents: 18 pcs. / 6 pieces in grit 60, 120, 240 each

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length x Height in mm	Packing unit/pcs.	Cat. number
80 x 50 x 20	1	72129

R-flex wheel

RFR 654



Properties

Bonding agent	Plastic
Grain	Aluminium oxide/SiC

Applications:

Stainless steel	●	Plastic	●
Steel	●	Glass	○
NF metals	●		
Aluminium	●		

Advantages: Versatile abrasive wheel - Deburring, matt finishing and finishing with one tool - Good adaptation to workpiece contour - Soft abrasion due to elastic structure - Can be used until completely worn down - Available in 3 bond hardnesses: soft (W), medium (E) and hard (Z)

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

All sizes and minimum purchasing quantities available on request

Carbide burrs

Type		Form	Page
HF 100 A	(ZYA)	Cylindrical	283
HF 100 B	(Zyas)	Cylindrical with end cut	283
HF 100 C	(WRC)	Cylindrical with spherical head	284
HF 100 D	(KUD)	Spherical shape	285
HF 100 E	(TRE)	Oval shape	285
HF 100 F	(RBF)	Conical shape	286
HF 100 G	(SPG)	Arch shape	286
HF 100 H		Flame shape	287

Type		Form	Page
HF 100 J	(KSJ)	Conical shape, pointed nose (60°)	287
HF 100 K	(KSK)	Conical shape, pointed nose (90°)	288
HF 100 L	(KEL)	Conical shape, round nose	288
HF 100 M	(SKM)	Conical shape, pointed nose	289
HF 100 N	(WKN)	Dovetail	289
Sets of burrs			
HF 100	Set, 40 carbide burrs		290
HF 100	Set, 5 carbide burrs		290
HF 100 Steel	Set, 5 carbide burrs		291
HF 100 INOX	Set, 5 carbide burrs		291


Materials																								
Cut	Steel							Soft NF metals				Hard NF metals				Creep resistant materials	Cast iron	Plastics						
	Carbon steel	Tool steel	Non-alloyed steel	Case-hardened steel	Cast steel	Alloyed steel	Hardened steel	Aluminium	Messing	Copper	Zinc	Bronze	Titanium	Titanium alloy	Aluminium alloy (high SiC contingent)	Nickel based alloy	Cobalt based alloy	Grey cast iron	White cast iron	GRP	CFRP	Ebonite / Hard rubber	Thermoplastic material	Thermosets
2	●	●	●	●	●	●	●		●	●	●	●	●	●	●	●	●	●	●					●
3								●	●	●	●											●	●	
6	●	●	●	●	●	●	●		●	●		●	●	●	●	●	●	●	●	●	●			●
10	●	●	●	●	●	●	●											●	●					
11																●	●							

● = main application ● = possible application

● = main application ● = possible application

Carbide burr

HF 100 A



Properties: Cylindrical burr without end-cut - Designation in accordance with DIN 8032: ZYA

Advantages: For universal use - Especially suitable for surface grinding



Diameter in mm	Height in mm	Total length in mm	Shaft diameter in mm	Cut	Packing unit/pcs.	Cat. number
3	14	38	3	6	5	295482
12,7	25	70	6	3	1	295604
6	18	50	6	6	1	295531
8	19	64	6	6	1	295552
9,6	19	64	6	6	1	295568
12,7	19	64	6	6	1	295594
12,7	25	70	6	6	1	295609
16	25	70	6	6	1	295621
8	19	64	6	11	1	334119

Carbide burr

HF 100 B



Properties: Cylindrical burr with end cut - Designation in accordance with DIN 8032: ZYAS

Advantages: The end cut makes it suitable for blind holes and faces on inner contours



Diameter in mm	Height in mm	Total length in mm	Shaft diameter in mm	Cut	Packing unit/pcs.	Cat. number
3	14	38	3	6	5	295483
6,3	12,7	55	3	6	5	295507
6	18	50	6	2	1	295522
12,7	25	70	6	2	1	295603
6	18	50	6	3	1	295526
9,6	19	64	6	3	1	295564
12,7	25	70	6	3	1	295605
6	18	50	6	6	1	295532


Carbide Burrs

► Continuation of HF 100 B, Carbide burr

Diameter in mm	Height in mm	Total length in mm	Shaft diameter in mm	Cut	Packing unit/pcs.	Cat. number
8	19	64	6	6	1	295553
9,6	19	64	6	6	1	295569
12,7	19	64	6	6	1	295595
12,7	25	70	6	6	1	295610
16	25	70	6	6	1	295622
6	18	50	6	10	1	334124
8	19	64	6	10	1	334125
9,6	19	64	6	10	1	334131
12,7	25	70	6	10	1	334132

Carbide burr

HF 100 C



Properties: Cylindrical burr with ball end - Designation in accordance with DIN 8032: WRC


Advantages: For universal use on surfaces, contours and radiuses



Diameter in mm	Height in mm	Total length in mm	Shaft diameter in mm	Cut	Packing unit/pcs.	Cat. number
3	14	38	3	2	5	295649
3	14	38	3	6	5	295654
6	18	50	6	2	1	295686
12,7	25	70	6	2	1	295747
6	18	50	6	3	1	295688
9,6	19	63	6	3	1	295725
12,7	25	70	6	3	1	295750
6	18	50	6	6	1	295694
8	19	63	6	6	1	295713
9,6	19	63	6	6	1	295727
12,7	19	64	6	6	1	295741
12,7	25	70	6	6	1	295753
16	25	70	6	6	1	295763
6	18	50	6	10	1	334133
8	19	64	6	10	1	334135
9,6	19	64	6	10	1	334137
12,7	25	70	6	10	1	334140
6	18	50	6	11	1	334134
8	19	64	6	11	1	334136
9,6	19	64	6	11	1	334138
12,7	25	70	6	11	1	334139

Carbide burr

HF 100 D



Properties: Ball-shaped burr - Designation in accordance with DIN 8032: KUD


Advantages: For use on contours - For deburring bore holes



Diameter in mm	Height in mm	Total length in mm	Shaft diameter in mm	Cut	Packing unit/pcs.	Cat. number
3	2,5	38	3	6	5	295784
9,6	8	54	6	3	1	300054
6	4,7	50	6	6	1	295819
8	6	52	6	6	1	295831
9,6	8	54	6	6	1	295843
12,7	11	56	6	6	1	295859
6	4,7	50	6	11	1	334142

Carbide burr

HF 100 E



Properties: Drop-shaped burr - Designation in accordance with DIN 8032: TRE

Advantages: For milling out fillet welds - Suitable for working on moulded parts




Diameter in mm	Height in mm	Total length in mm	Shaft diameter in mm	Cut	Packing unit/pcs.	Cat. number
8	15	60	6	6	1	295909
9,6	16	60	6	6	1	295916
12,7	22	67	6	6	1	295925
12,7	22	67	6	11	1	334150

Carbide Burrs

Carbide burr

HF 100 F



Properties: Semi-circular burr - Designation in accordance with DIN 8032: RBF


Advantages: Well suited for working on moulded parts



Diameter in mm	Height in mm	Total length in mm	Shaft diameter in mm	Cut	Packing unit/pcs.	Cat. number
3	14	38	3	6	5	295951
9,6	19	64	6	3	1	295985
12,7	25	70	6	3	1	296007
6	18	50	6	6	1	295971
9,6	19	64	6	6	1	295987
8	20	65	6	6	1	295978
12,7	25	70	6	6	1	296010
9,6	19	64	6	10	1	334155
12,7	25	70	6	10	1	334157
9,6	19	64	6	11	1	334156

Carbide burr

HF 100 G



Properties: Pointed arch-shaped burr with flattened tip - Designation in accordance with DIN 8032: SPG

Advantages: Ideal for chamfering - For deburring bore holes



Diameter in mm	Height in mm	Total length in mm	Shaft diameter in mm	Cut	Packing unit/pcs.	Cat. number
3	14	38	3	2	5	296043
3	14	38	3	6	5	296047
6,3	12,7	45	3	6	5	296055
6	18	50	6	6	1	296062
8	19	64	6	6	1	296066
9,6	19	64	6	6	1	296074
12,7	19	64	6	6	1	296079



►► Continuation of HF 100 G, Carbide burr

Diameter in mm	Height in mm	Total length in mm	Shaft diameter in mm	Cut	Packing unit/pcs.	Cat. number
12,7	25	70	6	6	1	296086
8	19	64	6	10	1	334161
12,7	25	70	6	10	1	334165
8	19	64	6	11	1	334162


Carbide burr

HF 100 H



Properties: Flame-shaped burr - No designation in accordance with DIN 8032

Advantages: Well suited for working on moulded parts



Diameter in mm	Height in mm	Total length in mm	Shaft diameter in mm	Cut	Packing unit/pcs.	Cat. number
8	19	64	6	6	1	296193
9,6	19	65	6	6	1	297074
12,7	32	77	6	6	1	296194

Carbide burr

HF 100 J



Properties: Conical burr - 60° angle - Designation in accordance with DIN 8032: KSJ

Advantages: Suitable for chamfering or bevelling




All sizes and minimum purchasing quantities available on request

Carbide Burrs

Carbide burr

HF 100 K



Properties: Conical burr - 90° angle - Designation in accordance with DIN 8032: KSK

Advantages: For deburring bore holes - For chamfering or bevelling



All sizes and minimum purchasing quantities available on request


Carbide burr

HF 100 L



Properties: Conical round-nosed burr - Designation in accordance with DIN 8032: KEL


Advantages: For difficult-to-access areas



Diameter in mm	Height in mm	Total length in mm	Shaft diameter in mm	Cut	Packing unit/pcs.	Cat. number
3	14	38	3	6	5	296199
9,6	30	76	6	3	1	300055
12,7	32	77	6	3	1	297470
6	18	50	6	6	1	296200
8	25,4	70	6	6	1	296205
9,6	30	76	6	6	1	296201
12,7	32	77	6	6	1	296192
9,6	30	76	6	10	1	334172
12,7	32	77	6	10	1	334173
12,7	32	77	6	11	1	334174

Carbide burr

HF 100 M



Properties: Pointed cone burr - Designation in accordance with DIN 8032: SKM

Advantages: For deburring tasks - For conical holes and grooves - Ideal for model building



Diameter in mm	Height in mm	Total length in mm	Shaft diameter in mm	Cut	Packing unit/pcs.	Cat. number
3	11	38	3	6	5	296114
6	20	50	6	6	1	296136
8	18	64	6	6	1	300052
9,6	16	64	6	6	1	296144
12,7	22	71	6	6	1	296148

Carbide burr

HF 100 N



Properties: Angular burr without end cut - Designation in accordance with DIN 8032: WKN

Advantages: Suitable for difficult-to-access areas, inner edges or conical profiles



All sizes and minimum purchasing quantities available on request

Carbide Burrs

Carbide burr

HF 100 set



Properties: 40 piece burr set, cut 6, in lockable Klingspor presentation box

Contents: 2 x HF 100 B 6x18x6 (295532), 2 x HF 100 C 6x18x6 (295694), 2 x HF100 F 6x18x6 (295971), 2 x HF100 G 6x18x6 (296062), 2 x HF 100 L 6x18x6 (296200), 2 x HF 100 B 8x19x6 (295553), 2 x HF 100 C 8x19x6 (295713), 2 x HF 100 F 8x20x6 (295978), 2 x HF 100 G 8x19x6 (296066), 2 x HF 100 L 8x25,4x6 (296205), 2 x HF 100 B 9,6x19x6 (295569), 2 x HF 100 C 9,6x19x6 (295727), 2 x HF 100 F 9,6x19x6 (295987), 2 x HF 100 G 9,6x19x6 (296074), 2 x HF 100 L 9,6x30x6 (296201), 2 x HF 100 B 12,7x25x6 (295610), 2 x HF 100 C 12,7x25x6 (295753), 2 x HF 100 F 12,7x25x6 (296010), 2 x HF 100 G 12,7x25x6 (296086), 2 x HF 100 L 12,7x32x6 (296192)

Advantages: All top sellers at a glance

Size in mm	Shaft diameter in mm	Cut	Packing unit/pcs.	Cat. number
335 x 225 x 380	6	6	1	300627

Carbide burr

HF 100 set



Properties: 5 piece burr set, cut 6, in a Klingspor screw lid container


Contents: HF 100 B 9,6x19x6 (295569), HF 100 C 9,6x19x6 (295727), HF 100 D 9,6x8x6 (295843), HF 100 E 9,6x16x6 (295916), HF 100 F 9,6x19x6 (295987)

Advantages: Presentation of the top sellers - Practical and safe storage of the burrs

Size in mm	Shaft diameter in mm	Cut	Packing unit/pcs.	Cat. number
70 x 70 x 100	6	6	1	336927

Carbide burr

HF 100 Steel



Properties: 5 piece burr set, cut 10, in Klingspor screw box


Contents: HF 100 A 9.6x19x6 (334120), HF 100 C 9.6x19x6 (334137), HF 100 D 9.6x8x6 (334146), HF 100 F 9.6x19x6 (334155), HF 100 L 9.6x30x6 (334172)

Advantages: Presentation of high performance Steel tooth geometry (Cut 10), safe and convenient storage of the burrs - Tooth geometry optimised for processing steel and cast steel - Strikingly improved stock removal performance by contrast with standard cross-cut tooth geometries

Size in mm	Shaft diameter in mm	Cut	Packing unit/pcs.	Cat. number
70 x 70 x 100	6	10	1	337154

Carbide burr

HF 100 Inox



Properties: 5 piece burr set, cut 11, in a Klingspor screw box

Contents: HF 100 A 9,6x19,0x6 (334121), HF 100 C 9,6x19x6 (334138), HF 100 D 9,6x8x6 (334145), HF 100 F 9,6x19x6 (334156), HF 100 L 10x20x6 (334204)

Advantages: Presentation of the high performance Inox cut - Practical and safe storage of the burrs - Optimized cut for working on austenitic, corrosion and acid-proof stainless steels - Considerably higher stock removal rate compared to the standard double cut

Size in mm	Shaft diameter in mm	Cut	Packing unit/pcs.	Cat. number
70 x 70 x 100	6	11	1	334221

Wire brushes

Machines	Type of wire brush	Wire style	Bristle material	Material applications								Type	Page
				Construction steel	Carbon steel	Alloyed steels	Cast iron	Stainless steel	Aluminium	Copper	Brass		
	Wheel brush	knotted	Steel wire	●	●	●	●					<i>BR 600 Z</i>	293
			INOX wire					●	●	●	●	<i>BRP 600 Z</i>	293
	Pipeline brush	knotted	Steel wire	●	●	●	●					<i>BK 600 Z</i>	294
			INOX wire	●	●	●	●	●	●	●	●	<i>BK 600 W</i>	294
	Cone brush	crimped	Steel wire	●	●	●	●					<i>BT 600 Z</i>	295
			INOX wire	●	●	●	●	●	●	●	●	<i>BT 600 W</i>	295
	Wheel brush	crimped	Steel wire	●	●	●	●					<i>BR 600 W</i>	296
			INOX wire					●	●	●	●	<i>BRS 600 Z</i>	296
	Wheel brush with shaft Ø 6 mm	knotted	Steel wire	●	●	●	●					<i>BRS 600 W</i>	297
			INOX wire					●	●	●	●	<i>BRS 600 P</i>	297
	Wheel brush with shaft Ø 6 mm	crimped	Steel wire	●	●	●	●					<i>BTS 600 W</i>	298
			INOX wire					●	●	●	●	<i>BPS 600 Z</i>	298
	Cup-shaped brush with shaft Ø 6 mm	crimped	Steel wire	●	●	●	●					<i>BPS 600 W</i>	299
			INOX wire					●	●	●	●		
	End brush with shaft Ø 6 mm	knotted	Steel wire	●	●	●	●					<i>BHK 600</i>	300
			INOX wire					●	●	●	●	<i>BHP 600</i>	300
	End brush with shaft Ø 6 mm	crimped	Steel wire	●	●	●	●					<i>BHK 600</i>	301
			INOX wire					●	●	●	●	<i>BHZ 600</i>	301
	Handheld brush with wooden handpiece	straight	Steel wire	●	●	●	●						
			INOX wire					●	●	●	●		
	Handheld brush with plastic handpiece	crimped	Steel wire	●	●	●	●						
			INOX wire					●	●	●	●		
	Handheld brush fillet weld	straight	Steel wire	●	●	●	●						
			INOX wire					●	●	●	●		
	Spark plug brush	crimped	INOX wire					●	●	●	●		
			Brass wire						●	●	●		

● = main application

Wheel brush, knotted wire

BR 600 Z



Applications:

Stainless steel	●
Steel	●

Advantages: Wheel brush for pre- and post-processing of welding seams - For aggressive removal of scale, rust, slag - For heavy brushing and deburring work

Diameter x Width x Bore in mm	Thread/Shaft	Fill material	Wire thickness in mm	Filament length in mm	Number of knots	Max. RPM	Packing unit/pcs.	Cat. number
115 x 14 x 22,23		Steel	0,50	22	20	12500 rpm	1	358311
115 x 14 x 22,23		Stainless steel	0,50	22	20	12500 rpm	1	358342
115 x 14	thread M14	Steel	0,50	22	22	12500 rpm	1	370717
115 x 14	thread M14	Stainless steel	0,50	22	22	12500 rpm	1	370718
125 x 14 x 22,23		Steel	0,50	22	24	12500 rpm	1	358312
125 x 14 x 22,23		Stainless steel	0,50	22	24	12500 rpm	1	358343
125 x 14	thread M14	Steel	0,50	22	26	12500 rpm	1	370719
178 x 14 x 22,23		Steel	0,50	42	30	9000 rpm	1	358313
178 x 14 x 22,23		Stainless steel	0,50	42	30	9000 rpm	1	363720
178 x 14	thread M14	Steel	0,50	39	36	9000 rpm	1	370720

Pipeline brush, knotted wire

BRP 600 Z



Applications:

Steel	●
Stainless steel	●

Advantages: Ideal tool for the professional processing of U / V-type welds in pipeline, pipework and container construction - Thanks to its slim overall width it is also well suited for working on hard-to-reach areas (e.g. root or narrow fillet welds) - Cleaning of all welding seams on pipe connections

Diameter x Width x Bore in mm	Fill material	Wire thickness in mm	Filament length in mm	Number of knots	Max. RPM	Packing unit/pcs.	Cat. number
115 x 6 x 22,23	Steel	0,50	28	32	15000 rpm	1	358314
125 x 6 x 22,23	Steel	0,50	22	36	12500 rpm	1	358315
125 x 6 x 22,23	Stainless steel	0,50	22	36	12500 rpm	1	363992
178 x 6 x 22,23	Steel	0,50	42	48	9000 rpm	1	358319

Wire brushes

Bevel brush with thread, knotted wire

BK 600 Z



Applications:

Steel	●
Stainless steel	●

Advantages: Ideal tool for working on hard-to-reach areas, inside corners and bevels - High brushing capacity due to knotted wire design - Excellent for cleaning larger surfaces - Removal of scale, rust, paint, slag, etc.

Diameter x Width in mm	Thread/Shaft	Fill material	Wire thickness in mm	Filament length in mm	Number of knots	Max. RPM	Packing unit/pcs.	Cat. number
100 x 14	thread M14	Steel	0,50	20	18	12500 rpm	1	358327
100 x 14	thread M14	Stainless steel	0,50	20	20	12500 rpm	1	358329
115 x 14	thread M14	Steel	0,50	22	18	12500 rpm	1	358328
115 x 14	thread M14	Stainless steel	0,50	22	20	12500 rpm	1	358330

Bevel brush with thread, crimped wire

BK 600 W



Applications:

Steel	●
-------	---

Advantages: Ideal tool for working on hard-to-reach areas, inside corners and bevels - Material-protecting brushing due to crimped wire design - Excellent for cleaning larger surfaces - For removing rust, dirt, paint residue, etc.

Diameter in mm	Thread/Shaft	Fill material	Wire thickness in mm	Filament length in mm	Max. RPM	Packing unit/pcs.	Cat. number
115	thread M14	Steel	0,30	26	12500 rpm	1	364822
125	thread M14	Steel	0,30	26	12500 rpm	1	370724

Cup brush with thread, knotted wire

BT 600 Z



Applications:

Steel	●
Stainless steel	●

Advantages: For aggressive brushing work on large, flat surfaces - For preparing metal surfaces before varnishing - Stable knotted wire design for easy cleaning and removal of slag, rust, scale and concrete residues

Diameter in mm	Thread/Shaft	Fill material	Wire thickness in mm	Filament length in mm	Number of knots	Max. RPM	Packing unit/pcs.	Cat. number
65	thread M14	Steel	0,35	22	18	12500 rpm	1	358334
65	thread M14	Steel	0,50	22	18	12500 rpm	1	358335
65	thread M14	Stainless steel	0,50	22	18	12500 rpm	1	358340
80	thread M14	Steel	0,50	22	20	8500 rpm	1	358337
100	thread M14	Steel	0,50	27	22	8500 rpm	1	358338

Cup-shaped brush, crimped wire

BT 600 W



Applications:

Steel	●
Stainless steel	●

Advantages: Ideal tool for cleaning and clearing profiled or uneven surfaces, e.g. checker plate - For medium-duty brushing work, derusting and removing paint, impurities and paint residues - Material-saving work - For processing very thin sheet metal, e.g. car workshops and restoration companies

Diameter in mm	Thread/Shaft	Fill material	Wire thickness in mm	Filament length in mm	Max. RPM	Packing unit/pcs.	Cat. number
65	thread M14	Steel	0,30	21	12500 rpm	1	358372
65	thread M14	Stainless steel	0,30	21	12500 rpm	1	358377
80	thread M14	Steel	0,30	24	8500 rpm	1	358373
80	thread M14	Stainless steel	0,30	24	8500 rpm	1	358326
100	thread M14	Steel	0,30	27	8500 rpm	1	358375

Wire brushes

Wheel brush, crimped wire

BR 600 W



Applications:

Steel	●
Stainless steel	●

Advantages: Suitable for low to medium duty brushing and deburring of cut edges, tubes or small parts - Ø150-200 mm for use on stationary machines - Ø115/Ø125 mm for use on angle grinders - High fill density for a long service life

Incl. adapter set for brushes Ø 150 - 200 mm to reduce the mounting hole (12,7 mm, 16 mm, 19 mm, 22,2 mm, 25,4 mm)

Diameter x Width x Bore in mm	Thread/Shaft	Fill material	Wire thickness in mm	Filament length in mm	Max. RPM	Packing unit/pcs.	Cat. number
115 x 15	thread M14	Steel	0,30	24	15000 rpm	1	370722
125 x 15	thread M14	Steel	0,30	29	15000 rpm	1	370723
150 x 25 x 32		Steel	0,30	30	6000 rpm	1	363997
150 x 25 x 32		Stainless steel	0,30	30	6000 rpm	1	364000
178 x 25 x 32		Steel	0,30	42	6000 rpm	1	363998
178 x 25 x 32		Stainless steel	0,30	42	6000 rpm	1	364001
200 x 25 x 32		Steel	0,30	45	4500 rpm	1	363999
200 x 25 x 32		Stainless steel	0,30	45	4500 rpm	1	364002

Wheel brush with shaft, knotted wire

BRS 600 Z



Applications:

Steel	●
Stainless steel	●

Advantages: Knotted design for rough brushing work and long service life - For efficient work in hard-to-reach areas such as grooves, flutes, depressions - Deburring of cut edges, removal of scale, paint, slag

Diameter x Width x Shaft in mm	Total length in mm	Fill material	Wire thickness in mm	Filament length in mm	Number of knots	Max. RPM	Packing unit/pcs.	Cat. number
75 x 12 x 6	37	Steel	0,50	19	15	25000 rpm	10	358320
75 x 12 x 6	37	Stainless steel	0,50	19	15	25000 rpm	10	358321

Wheel brush with shaft, crimped wire

BRS 600 W



Applications:

Steel	●
Stainless steel	●



Advantages: Crimped wire design for gentle cleaning of small to medium surfaces - Excellently suitable for components with difficult access such as beads, flanged edges - Good brushing performance even with profiled workpieces

Diameter x Width x Shaft in mm	Total length in mm	Fill material	Wire thickness in mm	Filament length in mm	Max. RPM	Packing unit/pcs.	Cat. number
30 x 9 x 6	40	Steel	0,20	6	20000 rpm	20	358346
30 x 9 x 6	40	Stainless steel	0,20	6	20000 rpm	20	358357
40 x 9 x 6	40	Steel	0,20	11	18000 rpm	20	358348
40 x 9 x 6	40	Stainless steel	0,20	11	18000 rpm	20	358358
50 x 9 x 6	40	Steel	0,30	13	15000 rpm	10	358354
50 x 9 x 6	40	Stainless steel	0,30	13	15000 rpm	10	358359
60 x 14 x 6	44	Steel	0,30	18	15000 rpm	10	358355
60 x 14 x 6	44	Stainless steel	0,30	18	15000 rpm	10	358360
70 x 16 x 6	48	Steel	0,30	20	15000 rpm	10	358356
70 x 16 x 6	48	Stainless steel	0,30	20	15000 rpm	10	358362

Wheel brush with shaft, polyamide bristles

BRS 600 P



Applications:

Stainless steel	●
NF metals	●
Wood	●



Advantages: Abrasive bristles of polyamide interspersed with silicon carbide (SiC) grain for working with light contact pressure - Ideal for structuring and paint stripping of wooden components - Removal of oxide layers on non-ferrous metals or of tarnish colours on stainless steel components, e.g. filled rods on stainless steel railings

Diameter x Width x Shaft in mm	Total length in mm	Fill material	Filament length in mm	Max. RPM	Packing unit/pcs.	Cat. number
50 x 9 x 6	45	Polyamide SiC grit 120	10	6000 rpm	10	358364
50 x 9 x 6	45	Polyamide SiC grit 320	10	6000 rpm	10	358366
70 x 12 x 6	45	Polyamide SiC grit 120	14	4500 rpm	10	358367
70 x 12 x 6	45	Polyamide SiC grit 320	14	4500 rpm	10	358369

Wire brushes

Cup brush with shaft, crimped wire

BTS 600 W



Applications:

Steel	●
Stainless steel	●

Advantages: Ideal tool for cleaning small and medium-sized surfaces - Crimped wire ideal for fine machining or surface preparation of steel or stainless steel - Removes paint, rust, incrustations

Diameter x Shaft in mm	Total length in mm	Fill material	Wire thickness in mm	Filament length in mm	Max. RPM	Packing unit/pcs.	Cat. number
50 x 6	70	Steel	0,30	24	13000 rpm	20	358331
50 x 6	70	Stainless steel	0,30	24	13000 rpm	20	358332

End brush with shaft, knotted wire

BPS 600 Z



Applications:

Steel	●
Stainless steel	●

Advantages: Tool diameter changes depending on the rotation speed - Perfectly suited for working on pipe inner surfaces or bores - High brushing effect due to knotted wire design

Diameter x Shaft in mm	Total length in mm	Fill material	Wire thickness in mm	Filament length in mm	Number of knots	Max. RPM	Packing unit/pcs.	Cat. number
19 x 6	70	Steel	0,35	25	6	20000 rpm	20	358333
19 x 6	70	Stainless steel	0,35	25	6	20000 rpm	20	358336
22 x 6	70	Steel	0,35	25	8	20000 rpm	10	358339
22 x 6	70	Stainless steel	0,35	25	8	20000 rpm	10	358341
30 x 6	72	Steel	0,35	25	12	20000 rpm	10	358344
30 x 6	72	Stainless steel	0,35	25	12	20000 rpm	10	358345

End brush with shaft, crimped wire

BPS 600 W



Applications:

Steel	●
Stainless steel	●



Advantages: For fine machining and removal of light burrs in pipes or bores - Well suited for processing and cleaning moulds and die-cast parts - Very soft and adaptable tool

Diameter x Shaft in mm	Total length in mm	Fill material	Wire thickness in mm	Filament length in mm	Max. RPM	Packing unit/pcs.	Cat. number
12 x 6	70	Steel	0,30	25	20000 rpm	30	358350
12 x 6	70	Stainless steel	0,30	25	20000 rpm	30	358351
25 x 6	75	Steel	0,30	25	18000 rpm	10	358347
25 x 6	75	Stainless steel	0,30	25	18000 rpm	10	358352
30 x 6	75	Steel	0,30	25	18000 rpm	10	358349
30 x 6	75	Stainless steel	0,30	25	18000 rpm	10	358353

Wire brushes

Hand brush with wooden body

BH 600



Applications:

Steel	●
Stainless steel	●
NF metals	●

Advantages: Hand brush with wooden handle for manual removal of rust, dirt, paint

Length in mm	Overall length in mm	Filament length in mm	Fill material	Structure	Number of rows	Wire thickness in mm	Packing unit/pcs.	Cat. number
290	125	25	Steel	Straight	2	0,35	12	358361
290	125	25	Steel	Straight	3	0,35	12	358376
290	125	25	Steel	Straight	4	0,35	12	358365
290	125	25	Steel	Straight	5	0,35	12	358363
290	125	25	Stainless steel	Straight	3	0,30	12	358368
290	125	25	Stainless steel	Straight	4	0,30	12	358370
290	125	25	Brass	Crimped	3	0,35	12	358371
290	125	25	Brass	Crimped	4	0,35	12	358374

Hand brush with plastic handle

BHP 600



Applications:

Steel	●
Stainless steel	●
NF metals	●

Advantages: Comfortable handling due to ergonomically shaped plastic handle - Crimped wire design for gentle cleaning of steel, stainless steel or non-ferrous metals

Length in mm	Overall length in mm	Filament length in mm	Fill material	Structure	Wire thickness in mm	Packing unit/pcs.	Cat. number
265	140	25	Steel	Crimped	0,30	24	358323
265	140	25	Stainless steel	Crimped	0,30	24	358324
265	140	25	Brass	Crimped	0,30	24	358325

V Shaped scratch brush

BHK 600



Applications:

Steel	●
Stainless steel	●
NF metals	●

Advantages: V-shaped wire fill ideal for cleaning and cleansing fillet and V-type welds - Well suited for working in hard-to-reach areas, e.g. corners or angles

Length in mm	Overall length in mm	Filament length in mm	Fill material	Structure	Number of rows	Wire thickness in mm	Packing unit/pcs.	Cat. number
290	125	25	Steel	Straight	3	0,35	12	358378
290	125	25	Stainless steel	Straight	3	0,30	12	358379

Spark plug brush

BHZ 600



Applications:

Steel	●
Stainless steel	●
NF metals	●

Advantages: Soft brass or stainless steel wire suitable for fine brushing work - Ideal for the gentle cleaning of contact surfaces, e.g. spark plugs or electrodes

Length in mm	Overall length in mm	Filament length in mm	Fill material	Structure	Number of rows	Wire thickness in mm	Packing unit/pcs.	Cat. number
145	45	17	Brass	Crimped	3	0,17	25	358322
145	45	17	Stainless steel	Crimped	3	0,17	25	358463

Jigsaw blades

			Wood														Metal						Plastic and others							
Type			Softwood	Hardwood	HPL boards*	Construction wood	Coated boards	Countertop boards	Plywood	Multiplex	Core boards	MDF	Chipboards	Trespa® boards	Wood with nails	Laminate	Sheet metal	Steel	Stainless steel	Steel sheets	Non-ferrous metal	Aluminium	Sandwich material	Plastic	Fibre-reinforced plastics	FRP	Epoxy	PC boards	Page	
JS 302 WQ	EXTRA	Wood	●			●		●	●	●	●	●	●	●																304
JS 352 WQ	EXTRA	Wood	●			●		●	●	●	●	●	●	●																304
JS 601 WF	SUPRA	Wood	●			●			●	●	●	●	●	●																305
JS 601 WQ	SUPRA	Wood	●			●			●	●	●	●	●	●																305
JS 941 WF	SPECIAL	Wood	●			●			●	●	●	●	●	●																306
JS 931 WF	SPECIAL	Wood	●			●			●	●	●	●	●	●																306
JS 901 WQ	SPECIAL	Wood		●	●				●		●			●	●															307
JS 661 WF	SUPRA	Wood	●			●	●	●	●	●	●																			307
JS 971 WF	SPECIAL	Wood	●			●	●	●	●	●	●																			308
JS 951 WF	SPECIAL	Wood	●			●	●		●							●														308
JS 901 WF	SPECIAL	Wood	●			●			●	●	●	●																		309
JS 981 WA	SPECIAL	Wood	●			●		●		●	●	●	●																	310
JS 941 LF	SPECIAL	Laminate					●									●									●			●		309
JS 601 LF	SUPRA	Laminate					●									●									●			●		310
JS 994 MT	SPECIAL	Metal															●	●	●	●										311
JS 904 MF	SPECIAL	Metal													●		●	●	●	●	●	●	●							311
JS 994 MF	SPECIAL	Metal															●	●	●	●										312
JS 993 MF	SPECIAL	Metal															●	●	●	●	●	●	●							312
JS 904 MT	SPECIAL	Metal																●					●	●		●				313
JS 993 MT	SPECIAL	Metal																●	●		●	●				●				313
JS 993 AX	SPECIAL	All Cut		●											●		●	●		●	●				●	●	●			314

● = Main applications * High Pressure Laminate

Reciprocating saw blades

			Wood										Metal					Plastic and others						
Type			Softwood	Hardwood	Greenwood	Firewood	Construction wood	Plywood	Multiplex	Core boards	Chipboards	Wood with nails	Pallets	Sheet metal	Steel	Stainless steel	Non-ferrous metal	Aluminium	Plastic	Fibre-reinforced plastics	Epoxy	Aerated concrete	Masonry/brick	Page
RS 652 WF	/// SUPRA	Wood	●				●	●	●	●	●													315
RS 603 WF	/// SUPRA	Wood	●				●	●			●								●					315
RS 603 WR	/// SUPRA	Wood	●		●	●	●																	316
RS 902 WF	/// SPECIAL	Wood	●						●	●	●								●					316
RS 902 WQ	/// SPECIAL	Wood	●		●	●	●																	317
RS 903 MF	/// SPECIAL	Metal												●	●	●	●	●						318
RS 903 MQ	/// SPECIAL	Metal												●	●	●								319
RS 993 MA	/// SPECIAL	Metal												●	●	●								319
RS 983 MS	/// SPECIAL	Metal												●	●									321
RS 993 PQ	/// SPECIAL	Pallets										●	●		●	●	●	●		●	●			320
RS 915 CX	/// SPECIAL	Mineral-based materials																				●	●	322
RS 953 AQ	/// SPECIAL	All Cut									●	●								●	●			317
RS 903 AF	/// SPECIAL	All Cut										●					●	●						318
RS 993 AQ	/// SPECIAL	All Cut										●	●		●	●	●	●		●	●			320
RS 983 AS	/// SPECIAL	All Cut	●	●																●	●			321

● = Main applications

Jigsaw blades

Cr-V jigsaw blade crossground, set

JS 302 WQ EXTRA



NEW !



Properties

Thread/Shaft	T-shaft
Design	Crossground, set
Material	Chromium-vanadium

Applications:

Softwood	●	Chipboard	●
Construction wood	●	Blockboards	●
Kitchen worktop	●	Multiplex boards	●
Plywood	●	MDF	●

Advantages: Very fast, rough cuts in almost all wood materials - Top seller with very good price/performance ratio

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
8 x 100 x 1,25	75	6	5 - 50	5	670547
8 x 130 x 1,25	110	6	5 - 100	5	670548

Cr-V jigsaw blade crossground, set

JS 352 WQ EXTRA



NEW !



Properties

Thread/Shaft	T-shaft
Design	Crossground, set
Material	Chromium-vanadium

Applications:

Softwood	●	Blockboards	●
Construction wood	●	Chipboard	●
Kitchen worktop	●	Multiplex boards	●
Plywood	●		

Advantages: Very fast, rough curved cuts in almost all wood materials - Top seller with very good price/performance ratio

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
8 x 100 x 1,25	75	6	5 - 50	5	670549

Cr-V jigsaw blade crossground, tapered

JS 601 WF SUPRA



NEW !



Properties

Thread/Shaft	T-shaft
Design	Crossground, tapered
Material	Chromium-vanadium

Applications:

Construction wood	●	Chipboard	●
Softwood	●	Multiplex boards	●
Plywood	●	MDF	●
Blockboards	●		

Advantages: Very clean, straight cuts in wood and wood-based materials

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
8 x 100 x 1,45	75	10	3 - 30	5	670540
8 x 130 x 1,45	110	10	4 - 80	5	670517

Cr-V jigsaw blade crossground, tapered

JS 601 WQ SUPRA



NEW !



Properties

Thread/Shaft	T-shaft
Design	Crossground, tapered
Material	Chromium-vanadium

Applications:

Softwood	●	Chipboard	●
Construction wood	●	Multiplex boards	●
Plywood	●	MDF	●
Blockboards	●		

Advantages: Very clean, straight and fast cuts in wood and wood-based materials

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
8 x 100 x 1,45	75	6	10 - 45	5	670538
8 x 115 x 1,45	90	8	10 - 65	5	670542
8 x 115 x 1,45	95	6	6 - 70	5	669581

Jigsaw blades

Cr-V jigsaw blade crossground, tapered

JS 941 WF SPECIAL



NEW !



Properties

Thread/Shaft	T-shaft
Design	Crossground, tapered
Material	Chromium-vanadium

Applications:

Softwood	●	Chipboard	●
Construction wood	●	Multiplex boards	●
Plywood	●	MDF	●
Blockboards	●		

Advantages: Saw blade with back serration for clean curved cuts in wood and wood materials of all kinds - Fine, very clean cutting edges

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
5 x 100 x 1,45	75	10-18	4 - 30	5	670544

Cr-V jigsaw blade crossground, tapered

JS 931 WF SPECIAL



NEW !



Properties

Thread/Shaft	T-shaft
Design	Crossground, tapered
Material	Chromium-vanadium

Applications:

Softwood	●	Blockboards	●
Construction wood	●		
Chipboard	●		
Plywood	●		

Advantages: Top product with double-sided serration for extreme curved cuts in wood and wood-based materials - Fine and clean cutting edges - Suitable for thin and thick material


Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
5 x 115 x 1,45	95	8-11	3 - 60	5	670541

Bi-metal jig saw blade crossground, tapered

JS 901 WQ SPECIAL



NEW !



Properties

Thread/Shaft	T-shaft
Design	Crossground, tapered
Material	Bi-metal

Applications:


Hardwood	●	Chipboard	●
HPL (High Pressure Laminate)	●		
Plywood	●		
Blockboards	●		

Advantages: Very fast, straight and clean cuts in hard materials such as hardwood, laminate and HPL boards - Particularly long service life due to bi-metal construction

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
8 x 100 x 1,27	75	6	10 - 45	5	670551

Cr-V jigsaw blade crossground, tapered

JS 661 WF SUPRA



NEW !



Properties

Thread/Shaft	T-shaft
Design	Crossground, tapered
Material	Chromium-vanadium

Applications:

Softwood	●	Plywood	●
Construction wood	●	Multiplex boards	●
Coated panels	●		
Kitchen worktop	●		

Advantages: Very clean, straight cuts in wood and wood-based materials - Clean edges on the visible side due to butt serration - Especially for coated boards and kitchen worktops

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
8 x 100 x 1,45	75	10	3 - 30	5	670546

Jigsaw blades

Cr-V jigsaw blade crossground, tapered

JS 971 WF SPECIAL



NEW !



Properties

Thread/Shaft	T-shaft
Design	Crossground, tapered
Material	Chromium-vanadium

Applications:


Kitchen worktop	●
Coated panels	●
Softwood	●
Construction wood	●

Advantages: Chip-free and clean cut on both sides due to tooth tips radially aligned to the centre of the saw blade - Extra long blade, therefore particularly suitable for kitchen worktops

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
8 x 132 x 1,45	110	12	3 - 60	5	670533

Cr-V jigsaw blade crossground, tapered

JS 951 WF SPECIAL



NEW !



Properties

Thread/Shaft	T-shaft
Design	Crossground, tapered
Material	Chromium-vanadium

Applications:

Softwood	●
Construction wood	●
Coated panels	●
Laminate	●

Advantages: Fine and clean curved cuts in softwood and coated panels thanks to pointed toothing - Also perfectly suited for cutting laminate

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
8 x 100 x 1,45	75	18	2 - 20	5	670537

Cr-V jigsaw blade crossground, tapered

JS 901 WF SPECIAL



NEW !



Properties

Thread/Shaft	T-shaft
Design	Crossground, tapered
Material	Chromium-vanadium

Applications:

Softwood	●	Multiplex boards	●
Construction wood	●	MDF	●
Plywood	●		
Blockboards	●		

Advantages: Very clean, straight and fast cuts in wood and wood-based materials - Particularly clean cuts due to special tooth geometry ground on three sides - Also suitable for thick material up to 65 mm

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
8 x 115 x 1,45	90	9	3 - 65	5	670539

Cr-V jigsaw blade crossground, tapered

JS 941 LF SPECIAL



NEW !



Properties

Thread/Shaft	T-shaft
Design	Crossground, tapered
Material	Chromium-vanadium

Applications:

Laminate	●
Coated panels	●
Plastic	●

Advantages: Top product with back serration for curved cuts in laminate, vinyl parquet, plastic and plastic-coated panels - Fine serration for clean and tear-free cutting edges on all sides

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
5 x 100 x 1,45	75	17-19	3 - 30	5	670543

Jigsaw blades

Cr-V jigsaw blade crossground, tapered

JS 601 LF SUPRA



NEW !



Properties

Thread/Shaft	T-shaft
Design	Crossground, tapered
Material	Chromium-vanadium

Applications:

Laminate	●
Plastic	●
Coated panels	●

Advantages: Very clean, straight and chip-free cuts on both sides in plastic and plastic-coated materials - Top seller for laminate and vinyl parquet flooring

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
8 x 100 x 1,45	75	17	3 - 30	5	670550

Cr-V jigsaw blade crossground, tapered

JS 981 WA SUPRA



NEW !



Properties

Thread/Shaft	T-shaft
Design	Crossground, tapered
Material	Chromium-vanadium

Applications:


Softwood	●	Chipboard	●
Construction wood	●	Multiplex boards	●
Kitchen worktop	●	MDF	●
Blockboards	●		

Advantages: Very clean, straight and fast cuts in wood and wood-based materials - Particularly clean cuts due to special tooth geometry ground on three sides - Extra strong blade for cuts with precise angles

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
8 x 100 x 1,7	75	9	3 - 45	5	670556
8 x 130 x 1,7	105	9	3 - 80	5	670535
8 x 170 x 1,7	145	9	3 - 120	5	670545

Bi-metal jigsaw blade milled, wavy

JS 994 MT SPECIAL



NEW !



Properties

Thread/Shaft	T-shaft
Design	Milled, wavy set
Material	Bi-metal

Applications:

Sheet metal	●
Metal	●
Steel	●
Stainless steel	●

Advantages: Special blade with Vario toothing for steel and stainless steel sheets - Finer toothing (as JS 994 MF) for thinner material thicknesses - Straight cut - Long service life due to bi-metal construction

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
8 x 90 x 1	63	23-28	1 - 3	5	670498

Bi-metal jigsaw blade milled, wavy

JS 904 MF SPECIAL



NEW !



Properties

Thread/Shaft	T-shaft
Design	Milled, wavy set
Material	Bi-metal

Applications:

Sheet metal	●	Non-ferrous metals	●
Metal	●	Aluminium	●
Steel	●	Wood with nails	●
Stainless steel	●		


Advantages: Top seller for metalworking - Straight cuts in all types of sheet metal and metals of all kinds, also stainless steel - Long service life due to bi-metal construction

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
8 x 100 x 1	75	12	2,5 - 6	5	669417

Jigsaw blades

Bi-metal jigsaw blade milled, wavy

JS 994 MF SPECIAL



NEW !



Properties

Thread/Shaft	T-shaft
Design	Milled, wavy set
Material	Bi-metal

Applications:

Sheet metal	●
Metal	●
Steel	●
Stainless steel	●

Advantages: Special blade with Vario toothing for steel and stainless steel sheets - Straight cut - Long service life due to bi-metal construction

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
8 x 90 x 1	63	11-13	2,5 - 6	5	670323

Bi-metal jigsaw blade milled, set

JS 993 MF SPECIAL



NEW !



Properties

Thread/Shaft	T-shaft
Design	Milled, set
Material	Bi-metal

Applications:

Sheet metal	●	Non-ferrous metals	●
Metal	●	Aluminium	●
Steel	●		
Stainless steel	●		

Advantages: Special blade with progressive toothing for profiles and sheets made of stainless steel, steel and other metals - For thin and thick material (up to 10mm thickness) - Very fast and straight cut - Long service life due to bi-metal construction

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
8 x 100 x 1	75	10-16	1,5 - 10	5	670530

Bi-metal jigsaw blade milled, wavy

JS 904 MT SPECIAL



NEW !



Properties

Thread/Shaft	T-shaft
Design	Milled, wavy set
Material	Bi-metal

Applications:


Metal	●
Sandwich material	●
Aluminium	●
Fibre reinforced plastics	●

Advantages: Particularly long saw blade for pipes and larger profile cross-sections made of metal - Specially suitable for thin-walled profiles due to fine toothing - Straight cut

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
8 x 130 x 1	110	21	1 - 3	5	670532

Bi-metal Jigsaw blade milled, set

JS 993 MT SPECIAL



NEW !



Properties

Thread/Shaft	T-shaft
Design	Milled, set
Material	Bi-metal

Applications:

Aluminium	●	Non-ferrous metals	●
Fibre reinforced plastics	●		
Steel	●		
Stainless steel	●		

Advantages: Universally versatile blade with Vario toothing for metal and plastic processing - For cutting tubes, profiles, sheets in low to medium material thickness - Also excellently suited for plastics and sandwich multi layered material - Straight, fast cuts - Extra long blade for larger workpiece cross-sections - Long service life due to bi-metal construction

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
8 x 132 x 1	110	16-25	1,2 - 6	5	670505

Jigsaw blades

Bi-metal jigsaw blade milled, set

JS 993 AX SPECIAL



NEW !



Properties

Thread/Shaft	T-shaft
Design	Milled, set
Material	Bi-metal

Applications:

Hardwood	●	Metal	●
Fibre reinforced plastics	●	Stainless steel	●
Epoxy resin	●	Non-ferrous metals	●
Steel	●	Wood with nails	●

Advantages: Universal saw blade with Vario tothing in bi-metal construction suitable for cutting all materials, also for wood with nails - Extra thick, stable and long blade for large workpiece cross-sections

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
8 x 132 x 1,27	110	10-14	3 - 80	5	670527

Cr-V reciprocating saw blade crossground, set

RS 652 WF SUPRA



NEW !

Properties

Thread/Shaft	Universal shaft 1/2"
Design	Crossground, set
Material	Chromium- vanadium

Applications:

Softwood	●
Construction wood	●
Plywood	●
Multiplex boards	●


Blockboards	●
Chipboard	●

Advantages: Universal saw blade for wooden beams and construction timber up to 100 mm material thickness - Fine cutting edges - Also for curved cuts in wood-based material and kitchen worktops - Good price/performance ratio

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
19 x 150 x 1,2	130	6	6 - 100	5	670493

Cr-V reciprocating saw blade milled and set

RS 603 WF SUPRA



NEW !

Properties

Thread/Shaft	Universal shaft 1/2"
Design	Milled, set
Material	Chromium- vanadium

Applications:

Softwood	●
Construction wood	●
Plywood	●
Chipboard	●

Advantages: Universal saw blade for wooden beams and construction timber with larger material cross-sections - Fine cutting edges - Also for curved cuts in wood-based material and kitchen worktops - Also suitable for cutting plastic tubes

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
19 x 230 x 1,2	210	6	6 - 180	5	670464
19 x 300 x 1,2	280	6	6 - 250	5	670476

Reciprocating saw blades

Cr-V reciprocating saw blade milled and set

RS 603 WR SUPRA



NEW !

Properties

Thread/Shaft	Universal shaft 1/2"
Design	Milled, set
Material	Chromium- vanadium

Applications:


Softwood	●
Construction wood	●
Greenwood	●
Firewood	●

Advantages: Cr-V saw blade with coarse toothing - For fast, rough cuts in wood, wood materials and kitchen worktops - Also suitable for greenwood and firewood

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
19 x 150 x 1,2	130	4	15 - 100	5	670496
19 x 230 x 1,2	210	3	20 - 170	5	670479
19 x 300 x 1,2	280	3	20 - 250	5	670472

Cr-V reciprocating saw blade crossground,
tapered

RS 902 WF SPECIAL



NEW !

Properties

Thread/Shaft	Universal shaft 1/2"
Design	Crossground, tapered
Material	Chromium- vanadium

Applications:


Plywood	●
Multiplex boards	●
Blockboards	●
Chipboard	●

Advantages: Cr-V saw blade with special three edge diamond ground toothing - Clean cuts in wood, wood materials and kitchen worktops - Also suitable for cutting plastic tubes

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
19 x 240 x 1,2	210	7	6 - 100	5	670469

Cr-V reciprocating saw blade crossground, set

RS 902 WQ SPECIAL



NEW !



Properties

Thread/Shaft	Universal shaft 1/2"
Design	Crossground, set
Material	Chromium- vanadium

Applications:

Softwood	●
Construction wood	●
Greenwood	●
Firewood	●

Advantages: Long saw blade with special, coarse toothing - Particularly suitable for softwood, greenwood and firewood - Very fast cut - No jamming in thicker branches and pieces of wood

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
19 x 240 x 1,2	210	4-5	15 - 190	5	670475

Bi-metal reciprocating saw blade milled and set

RS 953 AQ SPECIAL



NEW !



Properties

Thread/Shaft	Universal shaft 1/2"
Design	Milled, set
Material	Bi-metal

Applications:

Wood with nails	●
Chipboard	●
Fibre reinforced plastics	●
Epoxy resin	●

Advantages: Universal bi-metal blade for wood, wood with metal (nails, screws, fittings) and plastics - Ideal for demolition work, renovation of old buildings - Fast cuts - Also suitable for rough curve cutting

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
19 x 150 x 1,27	130	6	6 - 100	5	670435
19 x 230 x 1,27	210	6	6 - 170	5	670421

Reciprocating saw blades

Bi-metal reciprocating saw blade milled and set

RS 903 AF SPECIAL



Properties

Thread/Shaft	Universal shaft 1/2"
Design	Milled, set
Material	Bi-metal

Applications:

Wood with nails	●
Non-ferrous metals	●
Aluminium	●

Advantages: Bi-metal blade with finer toothing for wood with nails and for sheet metal, tubes and profiles made of various metals - For open profiles and medium-thick steel tubes

NEW !

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
19 x 150 x 0,9	130	10	3 - 12	5	670432
19 x 200 x 0,9	180	10	3 - 12	5	670362

Bi-metal reciprocating saw blade milled and set

RS 903 MF SPECIAL



Properties

Thread/Shaft	Universal shaft 1/2"
Design	Milled, set
Material	Bi-metal

Applications:

Steel	●
Stainless steel	●
Non-ferrous metals	●
Aluminium	●

Advantages: Bi-metal blade for cutting steel, stainless steel, aluminium and non-ferrous metals - Particularly suitable for thin-walled sheet metal, profiles and pipes due to the fine toothing - Top seller for the heating and plumbing sector

NEW !

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
19 x 150 x 0,9	130	18	1,5 - 4	5	670415
19 x 230 x 0,9	210	18	1,5 - 4	5	670434

Bi-metal reciprocating saw blade milled and set

RS 903 MQ SPECIAL



NEW !



Properties

Thread/Shaft	Universal shaft 1/2"
Design	Milled, set
Material	Bi-metal

Applications:

Sheet metal	●
Steel	●
Stainless steel	●

Advantages: Bi-metal blade for cutting all types of metal, including stainless steel - Particularly suitable for medium to thick sheet metal and profiles - Top product for the heating and plumbing sector

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
19 x 150 x 0,9	130	14	2 - 8	5	670322
19 x 230 x 0,9	210	14	2 - 8	5	670429

Bi-metal reciprocating saw blade milled and set

RS 993 MA SPECIAL



NEW !



Properties

Thread/Shaft	Universal shaft 1/2"
Design	Milled, set
Material	Bi-metal

Applications:

Sheet metal	●
Steel	●
Stainless steel	●

Advantages: Bi-metal blade with Vario toothing for all types of metal, including stainless steel - Particularly suitable for medium to thick sheets and profiles - Broad blade for precise rectangular and straight cuts - Particularly suitable for use in the heating and plumbing sector

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
25,4 x 150 x 0,9	130	10-14	4 - 12	5	670428
25,4 x 225 x 0,9	205	10-14	4 - 12	5	670338

Reciprocating saw blades

Bi-metal reciprocating saw blade milled and set

RS 993 AQ SPECIAL



NEW !

Properties

Thread/Shaft	Universal shaft 1/2"
Design	Milled, set
Material	Bi-metal

Applications:

Fibre reinforced plastics	●	Non-ferrous metals	●
Epoxy resin	●	Wood with nails	●
Steel	●		
Stainless steel	●		

Advantages: Saw blade in bi-metal construction and with Vario toothing - Universally suitable for metal, non-ferrous metals, wood and plastics - Fast cuts - Very well suited for wood with nails

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
19 x 150 x 0,9	130	10-14	3 - 10	5	670341
19 x 300 x 0,9	280	10-14	3 - 10	5	670352

Bi-metal reciprocating saw blade milled and set

RS 993 PQ SPECIAL



NEW !

Properties

Thread/Shaft	Universal shaft 1/2"
Design	Milled, set
Material	Bi-metal

Applications:

Fibre reinforced plastics	●	Non-ferrous metals	●
Epoxy resin	●	Aluminium	●
Steel	●	Wood with nails	●
Stainless steel	●		

Advantages: Saw blade in bi-metal construction and with Vario toothing - Universally suitable for metal, non-ferrous metals, wood and plastics - Fast cut - Top seller for pallets (wood with nails)

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
19 x 230 x 0,9	210	10-14	3 - 160	5	670359

Bi-metal reciprocating saw blade milled and set

RS 983 MS SPECIAL



NEW !

Properties

Thread/Shaft	Universal shaft 1/2"
Design	Milled, set
Material	Bi-metal

Applications:

Sheet metal	●
Steel	●

Advantages: Special blade in bi-metal construction with and Vario toothing for stainless steel, steel and other metals - Particularly suitable for pipes, profiles and sheets with large material cross-sections (e.g. steel beams) - Precise angular cuts due to increased saw blade thickness

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
19 x 230 x 1,57	210	8-10	4 - 12	5	670345

Bi-metal reciprocating saw blade milled and set

RS 983 AS SPECIAL



NEW !

Properties

Thread/Shaft	Universal shaft 1/2"
Design	Milled, set
Material	Bi-metal

Applications:

Hardwood	●
Softwood	●
Fibre reinforced plastics	●
Epoxy resin	●

Advantages: Bi-metal blade for demolition work and renovation of old buildings - Effortless cutting of wood, wood with nails, wood materials and plastics of all kinds - Straight and precise rectangular cuts due to increased saw blade thickness

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
19 x 230 x 1,57	210	4-6	20 - 190	5	670324

Reciprocating saw blades

Tungsten carbide tipped reciprocating saw blade

RS 915 CX SPECIAL



Properties

Thread/Shaft	Universal shaft 1/2"
Design	Special form
Material	Hard-metal

Applications:

Aerated concrete	●
Masonry	●

NEW



Advantages: Special saw blade with tungsten carbide tipped teeth especially for abrasive materials - Long service life and aggressive cut in aerated concrete and masonry

Width x Length x Thickness in mm	Overall length in mm	Teeth per inch	For material thickness in mm	Packing unit/pcs.	Cat. number
50 x 325 x 2,5	254	1,95	30 - 200	1	670042
50 x 460 x 2,5	388	1,95	30 - 360	1	670319



A large rectangular area with a light gray dot grid pattern, intended for taking notes.

Retail range

Machine	Application / Material	Product type	Page
	  	FP 77 K T-ACT	328
		PS 77 CK T-ACT	328
	  	PS 21 FK	329
	 	PS 18 EK	330
	   	AN 400	332
	  	PS 33 B/C K	333
	 	PS 22 K	335
	Hand pads, self-fastening for abrasive discs 125/150 mm	HBD 125/150	337
	  	PS 21 FK	329
	   	AN 400	339
	  	PS 33 B/C K	340
	 	PS 22 K	342
	   	AN 400	339
	  	PS 33 B/C K	340
	 	PS 22 K	342



Stainless steel



Metal



Wood



Paint



Filler



Plastic



Steel



NF metals



Hardwood



Varnish



Glass



Aluminium



Stone



Concrete



Titanium




Carbon steel




High alloy steel

Machine	Application / Material	Product type	Page
	   	AN 400	343
	  	PS 33 B/C K	344
	 	PS 22 K	345
	   	AN 400	333
	  	PS 33 B/C K	346
	 	PS 22 K	347
	  	PS 19 E/F K	331
	  	PS 33 B/C K	333
	   	AN 400	332
	  	LS 309 XH	348
	   	CS 310 XF	349
	 	KM 613	350
	  	CS 561	350

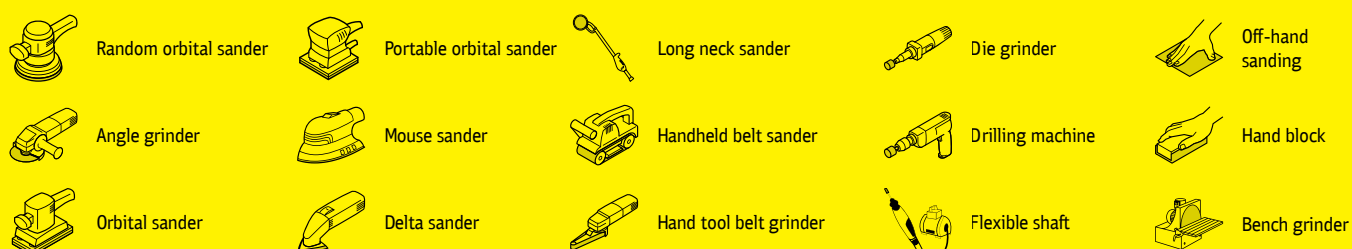

Retail range

Machine	Application / Material	Product type	Page
	 	KL 375 J	351
	 	PL 31 B	352
	  	PS 33 B/C	352
	  	PS 30 D	353
	 	KL 371 X	354
	 	PL 31 B	354
	 	PS 33 B/C	355
	   	PS 11 A	356
		PS 11 C	356
	   	NPA 400	357
	 	SK 500	357
		SK 700 A	358
		SW 501	358



Stainless steel



Metal



Wood



Paint



Filler



Plastic



Steel



NF metals



Hardwood



Varnish



Glass



Aluminium



Stone



Concrete



Titanium



Carbon steel



High alloy steel

Machine	Thickness in mm	Application / Material	Product type	Page
	0,8	  	A 980 TZ Special	359
		 	A 60 Extra	359
		 	A 660 R Supra	360
		 	A 60 TZ Special	361
	1,0	 	A 960 TZ Special	361
		    	K 960 TX Special	362
		   	Z 960 TX Special	362
	1,2	  	EDGE	363
		 	A 346 Extra	363
			A 646 R Supra	364
	1,6	 	A 46 TZ Special	364
		 	A 946 TZ Special	365



Random orbital sander



Portable orbital sander



Long neck sander



Die grinder



Off-hand sanding



Angle grinder



Mouse sander



Handheld belt sander



Drilling machine



Hand block



Orbital sander



Delta sander



Hand tool belt grinder



Flexible shaft



Bench grinder

Retail range

Abrasive film, self-fastening, waterproof

FP 77 K T-ACT Retail packs Set



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	Film

Applications:

Paint/Varnish/Filler	●	Composite materials	●
Primer	●	Plastic	●
Filler	●		
Gel coats	●		



Advantages: High performance disc with optimised clogging behaviour - Increased service life due to the new coating, which prevents the adhesion of paint and dust particles - With a highly flexible and perfectly flat film backing for high quality surface finishing - **Set discs:** Assortments in two pieces grit 240, two pieces grit 320 and two pieces grit 400

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Hole pattern	Cat. number
125	several grain sizes	⊗ GLS 5	367314
150	several grain sizes	⊗ GLS 74	368446

Packing unit (Minimum order quantity) = 5 packs of 6 discs

Abrasive paper, self-fastening

PS 77 CK T-ACT Retail packs



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	C-paper

Applications:

Paint/Varnish/Filler	●	Composite materials	●
Primer	●	Plastic	○
Filler	●		
Gel coats	●		



Advantages: New high-performance disc with optimized anti-clogging behaviour - Increased service life due to the new coating, which prevents the adhesion of paint and dust particles - For aggressive grinding at high loads, a flexible and tear-resistant C-latex paper is used

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Hole pattern	Cat. number
125	80	⊗ GLS 27	360318
125	100	⊗ GLS 27	360319
125	120	⊗ GLS 27	360321
125	150	⊗ GLS 27	360322
125	180	⊗ GLS 27	360323
150	80	⊗ GLS 47	360349
150	100	⊗ GLS 47	360347
150	120	⊗ GLS 47	360351
150	150	⊗ GLS 47	360350
150	180	⊗ GLS 47	360348

Packing unit (Minimum order quantity) = 5 packs of 5 discs

Abrasive paper, self-fastening

PS 77 CK T-ACT

Retail packs Set

**Properties**

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	C-paper

Applications:

Paint/Varnish/Filler	●	Composite materials	●
Primer	●	Plastic	○
Filler	●		
Gel coats	●		

Advantages: New high-performance disc with optimized anti-clogging behaviour - Increased service life due to the new coating, which prevents the adhesion of paint and dust particles - For aggressive grinding at high loads, a flexible and tear-resistant C-latex paper is used -

Set discs: Assortments in two pieces grit 80, two pieces grit 120 and two pieces grit 180

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Hole pattern	Cat. number
125	several grain sizes	⊙ GLS 5	367315
150	several grain sizes	⊙ GLS 47	383215
150	several grain sizes	⊙ GLS 74	367316

Packing unit (Minimum order quantity) = 5 packs of 6 discs

Abrasive paper, self-fastening

PS 21 FK

Retail packs

**Properties**

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close
Backing	F-paper

Applications:

Steel	●
Stainless steel	●
Metals	●

Advantages: Aggressive abrasive behavior due to self-sharpening zirconia alumina - Optimal recipe for rough grinding and finish grinding of stainless steel - Long service life

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Hole pattern	Cat. number
125	40	○ 0	367263
125	60	○ 0	367262
125	80	○ 0	367261
125	120	○ 0	367260
125	180	○ 0	367259
125	240	○ 0	367257
125	320	○ 0	367255
125	400	○ 0	367254
150	40	○ 0	367098
150	60	○ 0	367097



Retail range

► Continuation of PS 21 FK Retail packs, Abrasive paper, self-fastening

Diameter in mm	Grit	Hole pattern	Cat. number
150	80	○ 0	367095
150	40	⊙ GLS 3	367096
150	60	⊙ GLS 3	367100
150	80	⊙ GLS 3	367099

Packing unit (Minimum order quantity) = 5 packs of 5 discs

Abrasive paper, self-fastening

PS 18 EK Retail packs



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Open
Backing	E-paper

Applications:

Wood	●
Plastic	⦿
Paint/Varnish/Filler	⦿

Advantages: Special product for processing of wood and workpieces

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Hole pattern	Cat. number
125	40	⊙ GLS 5	315546
125	60	⊙ GLS 5	315547
125	80	⊙ GLS 5	315548
125	120	⊙ GLS 5	315550
125	180	⊙ GLS 5	367253
150	40	⊙ GLS 3	315553
150	60	⊙ GLS 3	315554
150	80	⊙ GLS 3	315555
150	120	⊙ GLS 3	315557
150	180	⊙ GLS 3	315559

Packing unit (Minimum order quantity) = 5 packs of 5 discs

Abrasive paper, self-fastening

PS 19 EK

Retail packs

NEW !
**Properties**

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	E-paper

Applications:

Wood	●
Paint/Varnish/Filler	●
Plastic	●
Glass/Stone	●

Advantages: Hard and sharp silicon carbide grain for hard and tough materials - Resistant high-performance disc with a stable E-paper backing for rough, intermediate and finish sanding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Hole pattern	Cat. number
225	24	⊗ GLS 55	665096

Packing unit (Minimum order quantity) = 5 packs of 5 discs

Abrasive paper, self-fastening

PS 19 FK

Retail packs

NEW !
**Properties**

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	F - paper + cloth

Applications:

Masonry	●	Plastic	●
Plaster	●	Wood	○
Concrete	●		
Paint/Varnish/Filler	●		

Advantages: Very robust high-performance disc with tear-resistant combined backing for coarse grinding - Hard and sharp silicon carbide grain for hard and tough materials - For extreme applications

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Hole pattern	Cat. number
225	16	⊗ GLS 55	665097

Packing unit (Minimum order quantity) = 5 packs of 5 discs

Retail range

Abrasive screen, self-fastening, waterproof

AN 400 Retail packs



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Backing	Polyester screen

Applications:

Paint/Varnish/Filler	●	Composite materials	●
Gel coats	●	Wood	●
Plaster	●	Wood-based materials	●
Plasterboard walls	●		

Advantages: Effective and full-surface dust extraction thanks to open grid structure - Dust-free grinding extends the service life of the abrasive - At the same time, improved health and safety thanks to reduced dust formation at the workstation - Independent of existing extraction hole patterns - Waterproof

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Hole pattern	Cat. number
125	80	● Screen	360234
125	120	● Screen	360235
125	180	● Screen	360237
125	240	● Screen	360238
125	320	● Screen	360251
150	80	● Screen	360261
150	120	● Screen	360262
150	180	● Screen	360263
150	240	● Screen	360264
150	320	● Screen	360265
225	80	● Screen	360278
225	120	● Screen	360279
225	180	● Screen	360282
225	240	● Screen	360280
225	320	● Screen	360281

Packing unit (Minimum order quantity) = 5 packs of 5 discs

Abrasive screen, self-fastening, waterproof

AN 400

Retail packs Set

**Properties**

Bonding agent	Resin
Grain	Aluminium oxide
Backing	Polyester screen

Applications:

Paint/Varnish/Filler	●	Composite materials	●
Gel coats	●	Wood	●
Plaster	●	Wood-based materials	●
Plasterboard walls	●		

Advantages: Effective and full-surface dust extraction thanks to open grid structure - Dust-free grinding extends the service life of the abrasive - At the same time, improved health and safety thanks to reduced dust formation at the workstation - Independent of existing extraction hole patterns - Waterproof - **Set discs:** Assortments in two pieces grit 80, two pieces grit 120 and two pieces grit 180

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

Diameter in mm	Grit	Hole pattern	Cat. number
96	several grain sizes	● Screen	367459
125	several grain sizes	● Screen	367328
150	several grain sizes	● Screen	367327
150	several grain sizes	● Screen	383201

Packing unit (Minimum order quantity) = 5 packs of 6 discs

Abrasive paper, self-fastening

PS 33 CK

Retail packs

**Properties**

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	C-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	ⓘ

Advantages: Improved abrasive and stock removal performance thanks to special heat-tempered aluminium oxide abrasive grain - Reduced clogging thanks to sanding active fillers in the size coat and the semi-open coating - Outstanding flexibility paired with good stability and tear resistance thanks to latex impregnated paper backing

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

Diameter in mm	Grit	Hole pattern	Cat. number
125	60	⊗ GLS 27	360312
125	80	⊗ GLS 27	360313
125	120	⊗ GLS 27	360314
125	60	⊗ GLS 5	360250
125	80	⊗ GLS 5	360248
125	120	⊗ GLS 5	360249
150	60	⊗ GLS 1	360266
150	80	⊗ GLS 1	360267
150	120	⊗ GLS 1	360268



Retail range

►► Continuation of PS 33 CK Retail packs, Abrasive paper, self-fastening

Diameter in mm	Grit	Hole pattern	Cat. number
150	60	⊙ GLS 3	360324
150	80	⊙ GLS 3	360325
150	120	⊙ GLS 3	360326
150	60	⊗ GLS 47	368440
150	80	⊗ GLS 47	368445
150	120	⊗ GLS 47	368444
150	60	⊗ GLS 51	360272
150	80	⊗ GLS 51	360273
150	120	⊗ GLS 51	360274
150	60	⊗ GLS 74	360330
150	80	⊗ GLS 74	360331
150	120	⊗ GLS 74	360334
225	60	⊗ GLS 55	366980
225	80	⊗ GLS 55	366979
225	120	⊗ GLS 55	366984

Packing unit (Minimum order quantity) = 5 packs of 5 discs

Abrasive paper, self-fastening

PS 33 BK Retail packs



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	⦿

Advantages: Improved abrasive and stock removal performance thanks to special heat-tempered aluminium oxide abrasive grain - Reduced clogging thanks to sanding active fillers in the size coat and the semi-open coating - Outstanding flexibility paired with good stability and tear resistance thanks to latex impregnated paper backing

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

Diameter in mm	Grit	Hole pattern	Cat. number
125	180	⊗ GLS 27	360315
125	240	⊗ GLS 27	360316
125	320	⊗ GLS 27	360317
125	180	⊙ GLS 5	360247
125	240	⊙ GLS 5	360246
125	320	⊙ GLS 5	360245
150	180	⊗ GLS 1	360269
150	240	⊗ GLS 1	360270
150	320	⊗ GLS 1	360271
150	180	⊙ GLS 3	360327
150	240	⊙ GLS 3	360328
150	320	⊙ GLS 3	360329
150	180	⊗ GLS 47	368443
150	240	⊗ GLS 47	368442
150	320	⊗ GLS 47	368441



►► Continuation of PS 33 BK Retail packs, Abrasive paper, self-fastening

Diameter in mm	Grit	Hole pattern	Cat. number
150	180	⊗ GLS 51	360275
150	240	⊗ GLS 51	360276
150	320	⊗ GLS 51	360277
150	180	⊗ GLS 74	360335
150	240	⊗ GLS 74	360336
150	320	⊗ GLS 74	360337
225	150	⊗ GLS 55	366977
225	180	⊗ GLS 55	366976

Packing unit (Minimum order quantity) = 5 packs of 5 discs

Abrasive paper, self-fastening

PS 22 K Retail packs



Properties

Bonding agent Resin	
Grain	Aluminium oxide
Coating	Semi-open
Backing	E-paper

Applications:

Wood	●
Metals	●
Stainless steel	⓪
Paint/Varnish/Filler	⓪

Plastic



Advantages: Universal abrasive disc for metalworking and woodworking - Uniform surface scratch pattern - Available in many grit sizes and dimensions

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

Diameter in mm	Grit	Hole pattern	Cat. number
115	40	○ 0	278805
115	60	○ 0	278806
115	80	○ 0	278807
115	120	○ 0	278808
115	180	○ 0	278809
115	40	⊗ GLS 4	243219
115	60	⊗ GLS 4	241608
115	80	⊗ GLS 4	243220
115	120	⊗ GLS 4	241610
115	180	⊗ GLS 4	241611
125	40	⊗ GLS 5	241614
125	60	⊗ GLS 5	241625
125	80	⊗ GLS 5	241626
125	120	⊗ GLS 5	241627
125	180	⊗ GLS 5	241628
150	40	⊗ GLS 1	371811
150	60	⊗ GLS 1	367094
150	80	⊗ GLS 1	367093
150	120	⊗ GLS 1	367092
150	180	⊗ GLS 1	371812
150	40	⊗ GLS 3	241649
150	60	⊗ GLS 3	241650



Retail range

►► Continuation of PS 22 K Retail packs, Abrasive paper, self-fastening

Diameter in mm	Grit	Hole pattern	Cat. number
150	80	⊗ GLS 3	241651
150	120	⊗ GLS 3	241652
150	180	⊗ GLS 3	241653
150	60	⊗ GLS 47	669620
150	80	⊗ GLS 47	669621
150	120	⊗ GLS 47	669622
150	180	⊗ GLS 47	669623
150	240	⊗ GLS 47	669625
150	320	⊗ GLS 47	669624
150	40	⊗ GLS 51	319068
150	60	⊗ GLS 51	319069
150	80	⊗ GLS 51	319070
150	120	⊗ GLS 51	319071
150	180	⊗ GLS 51	319073
150	60	⊗ GLS 74	669628
150	80	⊗ GLS 74	669629
150	120	⊗ GLS 74	669630
150	180	⊗ GLS 74	669631
150	240	⊗ GLS 74	669626

Packing unit (Minimum order quantity) = 5 packs of 5 discs

Protection pad, self-fastening

PP 555

Retail packs



Advantages: Improvement of adhesion and protection of the backing pad on random orbital sanders

Diameter in mm	Suitable for	Cat. number
125	Random orbital sander	370652
150	Random orbital sander	358148
225	Drywall sander	370662

Packing unit (Minimum order quantity) = 1 packs of 2 pads

Hand block, self fastening

HBD 125



NEW !



Advantages: Very suitable for surface and edge grinding - Fatigue-proof hand sanding due to ergonomic form - For self-fastening discs in diameter 125 mm - Self-fastening

Diameter in mm	Packing unit/pcs.	Cat. number
125	1	387039

Hand block, self fastening

HBD 150





NEW !

Advantages: Very suitable for surface and edge grinding - Fatigue-proof hand sanding due to ergonomic form - For self-fastening discs in diameter 150 mm - Self-fastening

Diameter in mm	Packing unit/pcs.	Cat. number
150	1	387044

Abrasive screen, self-fastening, waterproof

AN 400 Retail packs



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Backing	Polyester screen

Applications:

Paint/Varnish/Filler	●	Composite materials	●
Gel coats	●	Wood	●
Plaster	●	Wood-based materials	●
Plasterboard walls	●		

Advantages: Effective and full-surface dust extraction thanks to open grid structure - Dust-free grinding extends the service life of the abrasive - At the same time, improved health and safety thanks to reduced dust formation at the work station - Independent of existing extraction hole patterns - Waterproof

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Hole pattern	Cat. number
70 x 125	80	Screen	360204
70 x 125	120	Screen	360205
70 x 125	180	Screen	360206
70 x 125	240	Screen	360207
70 x 125	320	Screen	360208
80 x 133	80	Screen	360197
80 x 133	120	Screen	360198
80 x 133	180	Screen	360199
80 x 133	240	Screen	360200
80 x 133	320	Screen	360201
93 x 178	80	Screen	360223
93 x 178	120	Screen	360224
93 x 178	180	Screen	360225
93 x 178	240	Screen	360226
93 x 178	320	Screen	360227
103 x 115	80	Screen	367138
103 x 115	120	Screen	367137
103 x 115	180	Screen	367136
103 x 115	240	Screen	367135
103 x 115	320	Screen	367134
115 x 230	80	Screen	360217
115 x 230	120	Screen	360218
115 x 230	180	Screen	360219
115 x 230	240	Screen	360220
115 x 230	320	Screen	360222

Packing unit (Minimum order quantity) = 5 packs of 5 strips

Retail range

Abrasive paper, self-fastening

PS 33 CK Retail packs



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	C-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	○

Advantages: Improved abrasive and stock removal performance thanks to special heat-tempered aluminium oxide abrasive grain - Reduced clogging thanks to sanding active fillers in the size coat and the semi-open coating - Outstanding flexibility paired with good stability and tear resistance thanks to latex impregnated paper backing

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Hole pattern	Cat. number
70 x 125	60	GL 0	360209
70 x 125	80	GL 0	360210
70 x 125	120	GL 0	360213
80 x 133	40	GL 18	367118
80 x 133	60	GL 18	360293
80 x 133	80	GL 18	360294
80 x 133	120	GL 18	360295
93 x 178	60	GL 17	360228
93 x 178	80	GL 17	360230
93 x 178	120	GL 17	360231
103 x 115	40	GL 19	367214
103 x 115	60	GL 19	367215
103 x 115	80	GL 19	367216
103 x 115	120	GL 19	367217
115 x 230	60	GL 15	360300
115 x 230	80	GL 15	360301
115 x 230	120	GL 15	360302
115 x 115	60	GL 20	360306
115 x 115	80	GL 20	360307
115 x 115	120	GL 20	360308
115 x 105	40	GL 43	367222
115 x 105	60	GL 43	367221
115 x 105	80	GL 43	367220
115 x 105	120	GL 43	367227

Packing unit (Minimum order quantity) = 5 packs of 5 strips

Abrasive paper, self-fastening

PS 33 BK Retail packs



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	○

Advantages: Improved abrasive and stock removal performance thanks to special heat-tempered aluminium oxide abrasive grain - Reduced clogging thanks to sanding active fillers in the size coat and the semi-open coating - Outstanding flexibility paired with good stability and tear resistance thanks to latex impregnated paper backing

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Hole pattern	Cat. number
70 x 125	180	□ GL 0	360214
70 x 125	240	□ GL 0	360215
70 x 125	320	□ GL 0	360216
80 x 133	180	□ GL 18	360303
80 x 133	240	□ GL 18	360296
80 x 133	320	□ GL 18	360297
93 x 178	180	□ GL 17	360252
93 x 178	240	□ GL 17	360232
93 x 178	320	□ GL 17	360233
103 x 115	180	□ GL 19	367218
103 x 115	240	□ GL 19	367219
103 x 115	320	□ GL 19	367223
115 x 230	180	□ GL 15	360304
115 x 230	240	□ GL 15	360305
115 x 230	320	□ GL 15	360320
115 x 115	180	□ GL 20	360309
115 x 115	240	□ GL 20	360310
115 x 115	320	□ GL 20	360311
115 x 105	180	□ GL 43	367226
115 x 105	240	□ GL 43	367225
115 x 105	320	□ GL 43	367224

Packing unit (Minimum order quantity) = 5 packs of 5 strips

Retail range

Abrasive paper, self-fastening

PS 22 K Retail packs



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	E-paper

Applications:

Wood	●
Metals	●
Stainless steel	⦿
Paint/Varnish/Filler	⦿

Plastic	⦿
---------	---

Advantages: High removal rate - Uniform scratch pattern

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Hole pattern	Cat. number
70 x 125	60	□ GL 0	367130
70 x 125	80	□ GL 0	367132
70 x 125	120	□ GL 0	367131
70 x 125	180	□ GL 0	367133
80 x 133	40	▤ GL 18	367125
80 x 133	60	▤ GL 18	367126
80 x 133	80	▤ GL 18	367129
80 x 133	120	▤ GL 18	367127
80 x 133	180	▤ GL 18	367128
103 x 115	40	▤ GL 19	367240
103 x 115	60	▤ GL 19	367239
103 x 115	80	▤ GL 19	367238
103 x 115	120	▤ GL 19	367235
103 x 115	180	▤ GL 19	367237
115 x 230	40	▤ GL 15	369725
115 x 230	60	▤ GL 15	369726
115 x 230	80	▤ GL 15	369724
115 x 230	120	▤ GL 15	369723
115 x 230	180	▤ GL 15	369722
115 x 105	40	▤ GL 43	367234
115 x 105	60	▤ GL 43	367233
115 x 105	80	▤ GL 43	367232
115 x 105	120	▤ GL 43	367231

Packing unit (Minimum order quantity) = 5 packs of 5 strips

Finishing paper

PL 31 B Retail packs



Properties

Bonding agent	Glue
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Metals	○

Advantages: Product with optimal price-performance ratio - Optimised wear properties for hand-held machine grinding - Very fine surface scratch pattern

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Hole pattern	Cat. number
93 x 230	40	GL 9	382745
93 x 230	60	GL 9	382746
93 x 230	80	GL 9	382747
93 x 230	120	GL 9	382748
93 x 230	180	GL 9	382749
93 x 230	240	GL 9	382750

Packing unit (Minimum order quantity) = 5 packs of 5 strips

Abrasive screen, self-fastening, waterproof

AN 400 Retail packs Set



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Backing	Polyester screen

Applications:

Paint/Varnish/Filler	●	Composite materials	●
Gel coats	●	Wood	●
Plaster	●	Wood-based materials	●
Plasterboard walls	●		

Advantages: Effective and full-surface dust extraction thanks to open grid structure - Dust-free grinding extends the service life of the abrasive - At the same time, improved health and safety thanks to reduced dust formation at the workstation - Independent of existing extraction hole patterns - Waterproof - **Set:** Assortments in two pieces grit 80, two pieces grit 120 and two pieces grit 180

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Hole pattern	Cat. number
99 x 148	several grain sizes	△ GLS81	367745

Packing unit (Minimum order quantity) = 5 packs of 6 strips

Retail range

Abrasive paper, self-fastening

PS 33 CK Retail packs



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	C-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	○

Advantages: Improved abrasive and stock removal performance thanks to special heat-tempered aluminium oxide abrasive grain - Reduced clogging thanks to sanding active fillers in the size coat and the semi-open coating - Outstanding flexibility paired with good stability and tear resistance thanks to latex impregnated paper backing

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Hole pattern	Cat. number
98 x 148	40	△ GLS 24	366849
98 x 148	60	△ GLS 24	360333
98 x 148	80	△ GLS 24	360338
98 x 148	120	△ GLS 24	360339

Packing unit (Minimum order quantity) = 5 packs of 5 strips

Abrasive paper, self-fastening

PS 33 BK Retail packs



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	○

Advantages: Improved abrasive and stock removal performance thanks to special heat-tempered aluminium oxide abrasive grain - Reduced clogging thanks to sanding active fillers in the size coat and the semi-open coating - Outstanding flexibility paired with good stability and tear resistance thanks to latex impregnated paper backing

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Hole pattern	Cat. number
98 x 148	180	△ GLS 24	360340
98 x 148	240	△ GLS 24	360341
98 x 148	320	△ GLS 24	360342

Packing unit (Minimum order quantity) = 5 packs of 5 strips

Abrasive paper, self-fastening

PS 22 K Retail packs



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	E-paper

Applications:

Wood	●
Metals	●
Stainless steel	○
Paint/Varnish/Filler	○

Plastic ○

Advantages: Universal abrasive disc for metalworking and woodworking - Uniform surface scratch pattern - Available in many grit sizes and dimensions

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Hole pattern	Cat. number
98 x 148	40	△ GLS 24	366848
98 x 148	60	△ GLS 24	366847
98 x 148	80	△ GLS 24	366846
98 x 148	120	△ GLS 24	366845
98 x 148	180	△ GLS 24	366844
102 x 150	40	GLS 67	665436
102 x 150	60	GLS 67	665437
102 x 150	80	GLS 67	665438
102 x 150	120	GLS 67	665439
102 x 150	180	GLS 67	665440

Packing unit (Minimum order quantity) = 5 packs of 5 strips

Retail range

Abrasive paper, self-fastening

PS 33 CK Retail packs



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	C-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	○

Advantages: Improved abrasive and stock removal performance thanks to special heat-tempered aluminium oxide abrasive grain - Reduced clogging thanks to sanding active fillers in the size coat and the semi-open coating - Outstanding flexibility paired with good stability and tear resistance thanks to latex impregnated paper backing

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Hole pattern	Cat. number
96	40	△ GLS 15	366850
96	60	△ GLS 15	360241
96	80	△ GLS 15	360244
96	120	△ GLS 15	360243

Packing unit (Minimum order quantity) = 5 packs of 5 triangles

Abrasive paper, self-fastening

PS 33 BK Retail packs



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	○

Advantages: Improved abrasive and stock removal performance thanks to special heat-tempered aluminium oxide abrasive grain - Reduced clogging thanks to sanding active fillers in the size coat and the semi-open coating - Outstanding flexibility paired with good stability and tear resistance thanks to latex impregnated paper backing

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Hole pattern	Cat. number
96	180	△ GLS 15	360242
96	240	△ GLS 15	360240
96	320	△ GLS 15	360239

Packing unit (Minimum order quantity) = 5 packs of 5 triangles

Abrasive paper, self-fastening

PS 22 K Retail packs



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	E-paper

Applications:

Wood	●
Metals	●
Stainless steel	○
Paint/Varnish/Filler	○

Plastic	○
---------	---

Advantages: Universal abrasive disc for metalworking and woodworking - Uniform surface scratch pattern - Available in many grit sizes and dimensions

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Hole pattern	Cat. number
96	40	△ GLS 15	241656
96	60	△ GLS 15	241657
96	80	△ GLS 15	241658
96	120	△ GLS 15	241659
96	180	△ GLS 15	241660

Packing unit (Minimum order quantity) = 5 packs of 5 triangles

Abrasive paper, self-fastening

PS 22 K Retail packs Set



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	E-paper

Applications:

Wood	●
Metals	●
Stainless steel	○
Paint/Varnish/Filler	○

Plastic	○
---------	---

Advantages: Universal abrasive disc for metalworking and woodworking - Uniform surface scratch pattern - Available in many grit sizes and dimensions - **Set:** Assortments in two pieces grit 40, two pieces grit 80 and two pieces grit 120

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	Grit	Hole pattern	Cat. number
96	several grain sizes	△ GLS 15	241662
125	several grain sizes	⊗ GLS 5	241630
150	several grain sizes	⊗ GLS 51	319072

Packing unit (Minimum order quantity) = 5 packs of 6 triangles/discs

Retail range

Abrasive cloth

LS 309 XH Retail packs



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	X-cotton

Applications:

Wood	●
Metals	●
NF metals	●
Paint/Varnish/Filler	●

Advantages: Special type for portable belt sanders - For universal use on wood, metal, paint and varnish - Large product mix of belts for all standard machines

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Belt joint	Cat. number
75 x 457	40	F5	9189
75 x 457	60	F5	9176
75 x 457	80	F5	9172
75 x 457	100	F5	9171
75 x 457	120	F5	7138
75 x 533	40	F5	7018
75 x 533	60	F5	7019
75 x 533	80	F5	7020
75 x 533	100	F5	7021
75 x 533	120	F5	7022
75 x 533	150	F5	7023
75 x 533	180	F5	7077
100 x 560	40	F5	7036
100 x 560	60	F5	7037
100 x 560	80	F5	7038
100 x 560	100	F5	7039
100 x 560	120	F5	7040
100 x 610	40	F5	7080
100 x 610	60	F5	7081
100 x 610	80	F5	7082
100 x 610	100	F5	7083
100 x 610	120	F5	7084

Packing unit (Minimum order quantity) = 6 packs of 3 belts

Abrasive cloth

LS 309 XH Retail packs Set



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	X-cotton

Applications:

Wood	●
Metals	●
NF metals	●
Paint/Varnish/Filler	ⓘ

Advantages: Special type for portable belt sanders - For universal use on wood, metal, paint and varnish - Large product mix of belts for all standard machines - 1 piece each in grit 40, 80 and 120 assorted

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Belt joint	Cat. number
75 x 457	several grain sizes	F5	367035
75 x 533	several grain sizes	F5	367034
100 x 560	several grain sizes	F5	367036
100 x 610	several grain sizes	F5	367037

Packing unit (Minimum order quantity) = 6 packs of 3 belts

File belt, abrasive cloth

CS 310 XF Retail packs



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	XF-cotton

Applications:

Stainless steel	●
Metals	●
NF metals	●
Steel	●

Advantages: Universal type for working on radiuses and contours with belt files in all areas of metalworking

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Belt joint	Cat. number
10 x 330	40	F4G	367104
10 x 330	60	F4G	367105
10 x 330	120	F4G	367106
13 x 457	40	F4G	248820
13 x 457	60	F4G	248821
13 x 457	120	F4G	248822
13 x 610	40	F4G	367101
13 x 610	60	F4G	367102
13 x 610	120	F4G	367103


Packing unit (Minimum order quantity) = 6 packs of 3 belts

Retail range

Small abrasive mop

KM 613

Retail packs



Properties

Bonding agent	Resin
Grain	Aluminium oxide

Applications:

Stainless steel	●
Metals	●
Wood	⦿
Plastic	⦿

Advantages: Universal product for steel and stainless steel materials - Even removal rate - Suitable for use in hard-to-reach areas

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Width x Shaft in mm	Grit	Max. operating speed	Max. RPM	Cat. number
40 x 20 x 6	40	40 m/s	19000 rpm	360285
40 x 20 x 6	60	40 m/s	19000 rpm	360286
40 x 20 x 6	80	40 m/s	19000 rpm	360287
60 x 30 x 6	40	40 m/s	12700 rpm	360290
60 x 30 x 6	60	40 m/s	12700 rpm	360289
60 x 30 x 6	80	40 m/s	12700 rpm	360288
80 x 30 x 6	40	40 m/s	9500 rpm	366998
80 x 30 x 6	60	40 m/s	9500 rpm	366997
80 x 30 x 6	80	40 m/s	9500 rpm	366996

Packing unit (Minimum order quantity) = Ø 40 mm 36 pcs., Ø 60 mm 24 pcs., Ø 80 mm 20 pcs.

Abrasive fibre disc

CS 561

Retail packs



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close

Applications:

Steel	●	Stainless steel	⦿
NF metals	●	Wood	⦿
Metals	●		
Plastic	⦿		

Advantages: For universal use - Robust, resistant and long-lasting

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Hole in mm	Grit	Hole pattern	Max. RPM	Cat. number
115 x 22	24	⊗ 30	13300 rpm	255905
115 x 22	40	⊗ 30	13300 rpm	255906
115 x 22	60	⊗ 30	13300 rpm	255907
115 x 22	80	⊗ 30	13300 rpm	255908



►► Continuation of CS 561 Retail packs, Abrasive fibre disc

Diameter x Hole in mm	Grit	Hole pattern	Max. RPM	Cat. number
115 x 22	120	⊗ 30	13300 rpm	255909
125 x 22	24	⊗ 30	12200 rpm	255910
125 x 22	40	⊗ 30	12200 rpm	255911
125 x 22	60	⊗ 30	12200 rpm	255912
125 x 22	80	⊗ 30	12200 rpm	255913
125 x 22	120	⊗ 30	12200 rpm	255914

Packing unit (Minimum order quantity) = 5 packs of 5 fibre discs

Abrasive cloth

KL 375 J Retail packs



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	J-cotton

Applications:

Wood	●
Metals	●

Advantages: Universal abrasive cloth for hand processing of metal surfaces - Highly flexible

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Cat. number
115 x 5000	40	301050
115 x 5000	60	266533
115 x 5000	80	266538
115 x 5000	120	266548
115 x 5000	180	301052

Packing unit (Minimum order quantity) = 10 rolls

Retail range

Finishing paper

PL 31 B Retail packs



Properties

Bonding agent	Glue
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Metals	●

Advantages: Product with optimal price-performance ratio - Optimized wear properties for hand sanding and handheld machine sanding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Cat. number
115 x 5000	40	241817
115 x 5000	60	241818
115 x 5000	80	241819
115 x 5000	120	241820
115 x 5000	180	241821

Packing unit (Minimum order quantity) = 5 rolls

Abrasive paper

PS 33 C Retail packs



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	C-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	●

Advantages: Very high removal rate - Minimal clogging due to active abrasive substances - Longer service life - Good tear resistance and flexibility

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Cat. number
115 x 5000	60	366985
115 x 5000	80	366990
115 x 5000	120	366989

Packing unit (Minimum order quantity) = 5 rolls

Abrasive paper

PS 33 B Retail packs



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	⦿

Advantages: Very high removal rate - Minimal clogging due to active abrasive substances - Longer service life - Good tear resistance and flexibility

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Cat. number
115 x 5000	180	366987
115 x 5000	240	366986
115 x 5000	320	366988

Packing unit (Minimum order quantity) = 5 rolls

Abrasive paper

PS 30 D Retail packs



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	D-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Metals	⦿

Advantages: Sharp grit and high aggressiveness for use on wood, varnish, fillers - Flexible and tear-resistant, easy folding - Product with good price-performance ratio

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Cat. number
115 x 5000	40	294308
115 x 5000	60	280588
115 x 5000	80	280589
115 x 5000	100	267048
115 x 5000	120	267059
115 x 5000	150	267070
115 x 5000	180	279733
115 x 5000	220	294229

Packing unit (Minimum order quantity) = 10 rolls

Retail range

Abrasive cloth

KL 371 X Retail packs



Properties

Bonding agent	Glue
Grain	Aluminium oxide
Coating	Close
Backing	X-cotton

Applications:

Metals	●
NF metals	●

Advantages: Attractively priced universal product for surface hand grinding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Cat. number
230 x 280	40	241781
230 x 280	60	241783
230 x 280	80	241784
230 x 280	120	241785
230 x 280	240	241786

Packing unit (Minimum order quantity) = 5 packs of 5 sheets

Finishing paper

PL 31 B Retail packs



Properties

Bonding agent	Glue
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Metals	●

Advantages: Product with optimal price-performance ratio - Optimized wear properties for hand sanding - Very fine surface scratch pattern

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Cat. number
230 x 280	40	241776
230 x 280	60	241777
230 x 280	80	241778
230 x 280	120	241779
230 x 280	240	241780

Packing unit (Minimum order quantity) = 5 packs of 5 sheets

Abrasive paper

PS 33 C Retail packs



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	C-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	⓪

Advantages: High removal rate - For diverse applications

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Cat. number
230 x 280	80	371919
230 x 280	120	371918

Packing unit (Minimum order quantity) = 5 packs of 5 sheets

Abrasive paper

PS 33 B Retail packs



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	⓪

Advantages: High removal rate - For diverse applications

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Cat. number
230 x 280	180	371916
230 x 280	240	371922
230 x 280	320	371923

Packing unit (Minimum order quantity) = 5 packs of 5 sheets

Retail range

Abrasive paper, waterproof

PS 11 C Retail packs



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	C-paper

Applications:

Paint/Varnish/Filler	●
Plastic	●
Glass/Stone	⦿
Metals	⦿

Advantages: Special product for auto repair and painting - For hard and tough surfaces - Good adaptation and high stability - Wet and dry sanding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Cat. number
230 x 280	120	241787
230 x 280	180	241789

Packing unit (Minimum order quantity) = 5 packs of 5 sheets

Abrasive paper, waterproof

PS 11 A Retail packs



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	A-paper

Applications:

Paint/Varnish/Filler	●
Plastic	●
Glass/Stone	⦿
Metals	⦿

Advantages: Special product for auto repair and painting - For hard and tough surfaces - Good adaptation and high stability - Wet and dry sanding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	Grit	Cat. number
230 x 280	240	241790
230 x 280	400	241791

Packing unit (Minimum order quantity) = 5 packs of 5 sheets

Non-woven web hand pad, waterproof

NPA 400 Retail packs



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Non-woven material type	Soft non-woven material

Applications:

Stainless steel	●
Metals	●
Wood	●
Paint/Varnish	⓪

Plastic	⓪
---------	---

Advantages: Outstanding for surface finishing, e.g. adaptation to an existing surface scratch pattern - Can be used wet and dry

Width x Length in mm	Colour	Grade	Cat. number
152 x 229	maroon	very fine	367350

Packing unit (Minimum order quantity) = 28 packs of 2 sheets

Abrasive block, flexible, coated on 4 sides, waterproof

SK 500 Retail packs



Properties

Grain	Aluminium oxide
Coating	Close

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	⓪
Metals	⓪

Advantages: Can be used flat and upright (four usable sides) - For flat and profiled surfaces due to flexible foam core - Robust, washable and reusable

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length x Height in mm	Grit	Density	Grit color	Foam color	Cat. number
70 x 100 x 25	60	hard	brown	grey	367346
70 x 100 x 25	80	hard	brown	grey	670005
70 x 100 x 25	100	hard	brown	grey	367347
70 x 100 x 25	120	hard	brown	grey	670006
70 x 100 x 25	150	hard	brown	grey	367348
70 x 100 x 25	220	hard	brown	grey	367349

Packing unit (Minimum order quantity) = 32 pcs.

Retail range

Abrasive block, flexible, coated on 4 sides, waterproof

SK 700 A Retail packs



Properties

Grain	Aluminium oxide
Coating	Close

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	○
Metals	○

Advantages: Suitable for flat or upright use on all four sides - The angled edge (approx. 45°) makes it an exceptional choice for narrow, tapering workpiece contours - Excellent contouring and pressure distribution thanks to flexible foam core - Robust, washable and reusable

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length x Height in mm	Grit	Density	Grit color	Foam color	Cat. number
89 x 125 x 25	60	hard	brown	grey	367321
89 x 125 x 25	80	hard	brown	grey	670008
89 x 125 x 25	100	hard	brown	grey	367322
89 x 125 x 25	120	hard	brown	grey	670007
89 x 125 x 25	150	hard	brown	grey	367324
89 x 125 x 25	220	hard	brown	grey	367323

Packing unit (Minimum order quantity) = 18 pcs.

Abrasive sponge, flexible, coated on 2 sides, waterproof

SW 501 Retail packs



Properties

Grain	Aluminium oxide
Coating	Close

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	○
Metals	○

Advantages: Satin surface scratch pattern - For low and high profiled surfaces (two usable sides) - Crease and break resistant - Washable and reusable

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length x Height in mm	Grit	Density	Grit color	Foam color	Cat. number
96 x 123 x 12,5	120	soft	brown	yellow	367320
96 x 123 x 12,5	220	soft	brown	yellow	367319

Packing unit (Minimum order quantity) = 14 packs of 2 pcs.

Cutting-off wheel

A 980 TZ SPECIAL



Class	SPECIAL		Applications:	
Bond	■ ■ ■ ■ ■ ■ ■ ■	■	Stainless steel	●
Aggression	■ ■ ■ ■ ■ ■ ■ ■	■	Steel	●
Service life	■ ■ ■ ■ ■ ■ ■ ■	■	NF metals	●

Advantages: Free of iron, sulphur and chlorine - Very short cutting times - Particularly precise and clean cuts due to the low thickness - Low thermal load - Minimal burr formation, minimizing finish-machining - 10 pieces in a tin with viewing window for easy removal

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/tin	Cat. number
115 x 0,8 x 22,23		80 m/s	13300 rpm	10 discs	362548
125 x 0,8 x 22,23		80 m/s	12200 rpm	10 discs	362549

Minimum order quantity = 5 tins

Cutting-off wheel

A 60 EXTRA



Class	EXTRA		Applications:	
Bond	■ ■ ■ ■ ■ ■ ■ ■	■	Stainless steel	●
Aggression	■ ■ ■ ■ ■ ■ ■ ■	■	Metals	●
Service life	■ ■ ■ ■ ■ ■ ■ ■	■		

Advantages: Minimal burr formation - Low thermal load - Very good price-performance ratio - 10 pieces in a tin with viewing window for easy removal

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/tin	Cat. number
115 x 1 x 22,23		80 m/s	13300 rpm	10 discs	310499
125 x 1 x 22,23		80 m/s	12200 rpm	10 discs	310500

Minimum order quantity = 5 tins

Retail range

Cutting-off wheel

A 60 EXTRA



Class	EXTRA
Bond	■ ■ ■ ■ ■ □ □
Aggression	■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ □ □

Applications:	
Stainless steel	●
Metals	●

Advantages: Minimal burr formation - Low thermal load - Very good price-performance ratio - 5 tins in a sales display

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/display	Cat. number
115 x 1 x 22,23	—	80 m/s	13300 rpm	5 tins with 10 discs	312030
125 x 1 x 22,23	—	80 m/s	12200 rpm	5 tins with 10 discs	312031

Cutting-off wheel

A 660 R SUPRA



Class	SUPRA
Bond	■ ■ ■ ■ ■ □ □
Aggression	■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ □ □

Applications:	
Stainless steel	●
Steel	●

Advantages: Minimal burr formation - Low thermal load - Highest cutting performance - 10 pieces in a tin with viewing window for easy removal

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/tin	Cat. number
115 x 1 x 22,23	—	80 m/s	13300 rpm	10 discs	362677
125 x 1 x 22,23	—	80 m/s	12200 rpm	10 discs	362678

Minimum order quantity = 5 tins

Cutting-off wheel

A 60 TZ SPECIAL



Class	SPECIAL		Applications:
Bond	■ ■ ■ ■ ■ ■ ■ ■	■	Stainless steel ●
Aggression	■ ■ ■ ■ ■ ■ ■ ■	■	Steel ●
Service life	■ ■ ■ ■ ■ ■ ■ ■	■	NF metals ○

Advantages: Free of iron, sulphur and chlorine - Fast cutting - Minimal burr formation - Low thermal load - 10 pieces in a tin with viewing window for easy removal

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/tin	Cat. number
115 x 1 x 22,23	— — — — —	80 m/s	13300 rpm	10 discs	310503
125 x 1 x 22,23	— — — — —	80 m/s	12200 rpm	10 discs	310504

Minimum order quantity = 5 tins

Cutting-off wheel

A 960 TZ SPECIAL



Class	SPECIAL		Applications:
Bond	■ ■ ■ ■ ■ ■ ■ ■	■	Stainless steel ●
Aggression	■ ■ ■ ■ ■ ■ ■ ■	■	Steel ●
Service life	■ ■ ■ ■ ■ ■ ■ ■	■	

Advantages: Free of iron, sulphur and chlorine - Short cutting times and long service life - Low thermal load - Low burr formation - Optimized bonding for considerably longer service life - For diverse applications - 10 pieces in a tin with viewing window tin for easy removal

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/tin	Cat. number
115 x 1 x 22,23	— — — — —	80 m/s	13300 rpm	10 discs	362554
125 x 1 x 22,23	— — — — —	80 m/s	12200 rpm	10 discs	362553

Minimum order quantity = 5 tins

Retail range

Ceramic cutting-off wheel

K 960 TX SPECIAL



Fe·S·Cl
<0,1%

Class	SPECIAL
Bond	■■■■■■■■
Aggression	■■■■■■■■
Service life	■■■■■■■■

Applications:

Steel	●	Titanium	●
Stainless steel	●		
High alloy steel	●		
Carbon steel	●		

Advantages: Free of iron, sulfur and chlorine - Outstanding performance in daily use - Highest cutting performance, even with low grinding pressure - 10 pieces in a tin with viewing window for easy removal

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/tin	Cat. number
115 x 1 x 22,23	■■■■■■■■	80 m/s	13300 rpm	10 discs	362590
125 x 1 x 22,23	■■■■■■■■	80 m/s	12200 rpm	10 discs	362589

Minimum order quantity = 5 tins

Cutting-off wheel

Z 960 TX SPECIAL



Fe·S·Cl
<0,1%

Class	SPECIAL
Bond	■■■■■■■■
Aggression	■■■■■■■■
Service life	■■■■■■■■

Applications:

Stainless steel	●
Alloys	●
Carbon steel	●
Titanium	●

Advantages: Free of iron, sulphur and chlorine - Ideal for tough/hard materials such as titanium and high alloy steels - Short cutting times and long service life due to self-sharpening zirconia alumina - Low thermal load - Low burr formation - 10 pieces in a tin with viewing window for easy removal

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/tin	Cat. number
115 x 1 x 22,23	■■■■■■■■	80 m/s	13300 rpm	10 discs	362588
125 x 1 x 22,23	■■■■■■■■	80 m/s	12200 rpm	10 discs	362587

Minimum order quantity = 5 tins

Cutting-off wheel

EDGE SPECIAL

**Class**

Bond	■ ■ ■ ■ ■ ■ ■ ■
Aggression	■ ■ ■ ■ ■ ■ ■ □
Service life	■ ■ ■ ■ ■ ■ ■ ■

Applications:

Stainless steel	●
Steel	●
Aluminium	●

Advantages: High-performance cutting-off wheel with self-sharpening abrasive grain - Great cutting performance combined with a long service life - Wide range of applications - 10 pieces in a tin with viewing window for easy removal

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/tin	Cat. number
115 x 1,2 x 22,23	—	80 m/s	13300 rpm	10 discs	362578
125 x 1,2 x 22,23	—	80 m/s	12200 rpm	10 discs	362579

Minimum order quantity = 5 tins

Cutting-off wheel

A 346 EXTRA

**Class**

EXTRA

Bond	■ ■ ■ ■ □ □ □ □
Aggression	■ ■ ■ ■ □ □ □ □
Service life	■ ■ ■ ■ □ □ □ □

Applications:

Stainless steel	●
Steel	●
Aluminium	○

Advantages: Free of iron, sulphur and chlorine - Universal use on steel and stainless steel (INOX) - Cutting disc made of a calcined, cubic aluminium oxide that is self-sharpening - Minimal burr formation and longer service life - Best suited for cutting thin-walled profiles and pipes - 8 pieces in a tin with viewing window for easy removal

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/tin	Cat. number
115 x 1,6 x 22,23	—	80 m/s	13300 rpm	8 discs	347566
125 x 1,6 x 22,23	—	80 m/s	12200 rpm	8 discs	362583

Minimum order quantity = 5 tins

Retail range

Cutting-off wheel

A 646 R SUPRA



Class	SUPRA
Bond	■■■■■■■□
Aggression	■■■■■■■□
Service life	■■■■■■■□

Applications:	
Steel	●
Stainless steel	○

Advantages: Free of iron, sulphur and chlorine - Universal use on steel and stainless steel - Cutting disc made of self-sharpening, calcined aluminum oxide - Tremendous aggressiveness when used for cutting solid steel materials - 8 pieces in a tin with viewing window for easy removal

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/tin	Cat. number
115 x 1,6 x 22,23	■■■■■	80 m/s	13300 rpm	8 discs	362582
125 x 1,6 x 22,23	■■■■■	80 m/s	12200 rpm	8 discs	362581

Minimum order quantity = 5 tins

Cutting-off wheel

A 46 TZ SPECIAL



Class	SPECIAL
Bond	■■■■■■■□
Aggression	■■■■■■■□
Service life	■■■■■■■□

Applications:	
Stainless steel	●
Steel	●

Advantages: Free of iron, sulphur and chlorine - Universal use on steel and stainless steel - First choice for professional applications and fast cutting of demanding materials - 8 pieces in a tin with viewing window for easy removal

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/tin	Cat. number
115 x 1,6 x 22,23	■■■■■	80 m/s	13300 rpm	8 discs	362580
125 x 1,6 x 22,23	■■■■■	80 m/s	12200 rpm	8 discs	362585

Minimum order quantity = 5 tins

Cutting-off wheel

A 946 TZ SPECIAL



Class	SPECIAL
Bond	■ ■ ■ ■ ■ ■ ■ ■
Aggression	■ ■ ■ ■ ■ ■ ■ ■
Service life	■ ■ ■ ■ ■ ■ ■ □

Applications:	
Steel	●
Stainless steel	●
NF metals	ⓘ
Castings	ⓘ

Advantages: Free of iron, sulfur and chlorine - Extra long service life across all applications - For universal use in metal processing - Short cutting times - Low burr formation - Low thermal load - 8 pieces in a tin with viewing window for easy removal

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/tin	Cat. number
115 x 1,6 x 22,23	—	80 m/s	13300 rpm	8 discs	362584
125 x 1,6 x 22,23	—	80 m/s	12200 rpm	8 discs	342227

Minimum order quantity = 5 tins



Klingspor N.V. / S.A.
Herent, België / Belgique

Клингспор България ЕООД
София, България

KLINGSPOR Brusivo, spol. s r.o.
Brno, Česká republika

Klingspor A/S
Kolding, Danmark

Klingspor Schleifsysteme GmbH & Co. KG
Haiger, Deutschland

Klingspor Abrasivos S.A.
Alcobendas (Madrid), España

Klingspor S.A.S.
Droue sur Drouette, France

Klingspor Abrasives Limited
Workop, Nottinghamshire
Great Britain

Klingspor S.R.L
Brescia, Italia

Klingspor Magyarország Kft.
Budapest, Magyarország

Klingspor B.V.
Sittard, Nederland

Klingspor Schleifwerkzeuge GesmbH
Wien, Österreich

Klingspor Sp. z o.o.
Bielsko, Polska

Klingspor Sp. z o.o.
Kozy, Polska

Klingspor România SRL
Pantelimon, Ilfov, România

Klingspor d.o.o. Beograd
Beograd, Republika Srbija

Klingspor Suisse GmbH
Bubendorf, Suisse

Клінгспор ТОВ
Великі Мости, Львівська обл.,
Україна

Klingspor Inc.
Stoney Creek, Ontario, Canada

Klingspor Abrasivos S.A. de C.V.
Tijuana, Mexico

Klingspor Abrasives, Inc.
Hickory, North Carolina, USA

Klingspor Qingdao Ltd.
Qingdao, P.R. China

Klingspor Abrasive (Shanghai) Co. Ltd.
Shanghai, P.R. China

Klingspor India Private Limited
Pune, India

Klingspor PTE LTD
Singapore, Singapore

Klingspor PTE LTD
Bangkok, Ratcha-anachak Thai

Klingspor Middle East FZCO
Dubai, United Arab Emirates

Klingspor Vietnam Limited
Ho Chi Minh City, Vietnam

Klingspor Argentina SRL
Belén de Escobar, Buenos Aires,
Argentina

Klingspor Abrasivos Industriais Ltd
Pinhais, Brasil

Comercial Klingspor Chile Ltda.
Pudahuel, Santiago, Chile

Klingspor SAC
Lima, Perú

Klingspor Abrasives South Africa (Pty) Ltd.
Spartan-Kempton Park,
South Africa

Klingspor Australia Pty Ltd
Silverwater, Australia



POWERGRIP TRADING EST

TRADING, CONTRACTING & SERVICES

مؤسسة قبضة السلطة التجارية
التجارة المقاولات والخدمات

**AUTHORIZED DEALER
OF**



KLINGSPOR

Schleiftechnologie

